Rose Excellence Corporation San Francisco, Agusan del Sur		MIXER STANDARD OPERATING PROCEDURE		
Department	PRODUCTION	Revision No.	0	
Type of Document	WORK INSTRUCTION	Issue No.	1	
Document No.	REC-PD-M-02	Effective Date		Page 1 OF 4

DISTRIBUTION LIST

DCBS 1 - Office of the President	**DCBS 1** - Operations	**DCBS 1** - Admin Office

REVISION HISTORY

DCN No.	EFFECTIVITY DATE	ISSUE NO.	REV. NO.	PAGE AFFECTED	DETAILS OF CHANGE	ORIGINATOR
		1	0	ALL	FIRST ISSUE PER QMS	WILMAR M. MARFIL

REVISION LEVEL

PAGE	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
REV.																		

	NAME	POSITION	SIGNATURE
Authored by:	WILMAR M. MARFIL	Production Division Head	
Reviewed by:	MELINA G. COMEDIDO	COO	
Approved by:	MANUELITO O. GO	PRESIDENT / CEO	

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.

1. PURPOSE

To establish work instruction procedures for all ovens used both at commissary and branch levels and to achieve the expected output in terns of quality, safety and quantity.

2. SCOPE

This Work Instruction covers the Standard Operating Procedures (SOP) of all conventional mixers being used at all facilities of Rose Excellence Corporation.

3. DEFINITION OF TERMS

TERMS	DEFINITION
Power Cord	A cord connected to the machine and is used to Power it ON or OFF.
Switch Knob	A knob to turn clockwise/counter clockwise to turn ON/OFF machine
Grill Guard	Equipped with proximity sensor to turn ON/OFF machine while it is electrically engaged.
Red Push Button	A switch to turn OFF the machine
Timer	A device that can adjust time for mixing
Green Push Button	A switch to turn ON the machine.

4. TURNING ON PROCEDURE

ILLUSTRATION	CRITICAL PARAMETER	RESPONSIBLE
PLUG AC POWER PLUG.	Plug in the power cord at a safe convenience outlet. Ensure no breakage, exposed wirings before plugging the power cord. Ensure terminal wires are properly connected on the male prong and not loose.	Operator

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.

ILLUSTRATION	CRITICAL PARAMETER	RESPONSIBLE
	Turn ON the mixer by turning the knob clockwise. Ensure front panel are lit upon turning ON of the machine. Ensure bowl is clean before putting ingredients.	Operator
	Correctly set the timer (digital) /speed lever (analog) before starting. Ensure grill guard is properly engaged.	Operator
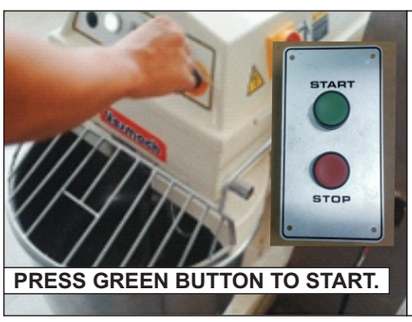	Start by pressing the GREEN Push Button. Press RED push button to stop.	Operator

5. TURNING OFF PROCEDURE

ILLUSTRATION	CRITICAL PARAMETER	RESPONSIBLE
	Green button is engaged indicating mixer is running. See to it that the mixer stops after the set time is reached. Push RED push button to stop. Ensure that the grill guar is NOT USED for stopping the machine.	Operator

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.

ILLUSTRATION	CRITICAL PARAMETER	RESPONSIBLE
	Turn OFF the mixer by rotating the knob COUNTER CLOCKWISE.	**Operator**
	Unplug the power cord and clean the machine.	**Operator**

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.