| Rose Excellence Corporation<br>San Francisco, Agusan del Sur | | OVEN<br>STANDARD OPERATING PROCEDURE | | |
|---|---|---|---|---|
| Department | PRODUCTION | Revision No. | 0 | |
| Type of Document | WORK INSTRUCTION | Issue No. | 1 | |
| Document No. | REC-PD-M-01 | Effective Date | | Page 1 OF 5 |

## DISTRIBUTION LIST

| | | |
|---|---|---|
| **DCBS 1** - Office of the President | **DCBS 1** - Operations | **DCBS 1** - Admin Office |

## REVISION HISTORY

| DCN No. | EFFECTIVITY DATE | ISSUE NO. | REV. NO. | PAGE AFFECTED | DETAILS OF CHANGE | ORIGINATOR |
|---|---|---|---|---|---|---|
| | | 1 | 0 | ALL | FIRST ISSUE PER QMS | WILMAR M. MARFIL |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

## REVISION LEVEL

| PAGE | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 | 18 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| REV. | | | | | | | | | | | | | | | | | | |

| | NAME | POSITION | SIGNATURE |
|---|---|---|---|
| Authored by: | WILMAR M. MARFIL | Production Division Head | |
| Reviewed by: | MELINA G. COMEDIDO | COO | |
| Approved by: | MANUELITO O. GO | PRESIDENT / CEO | |

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.

## 1. PURPOSE

**To establish work instruction procedures for all ovens used both at commissary and branch levels and to achieve the expected output in terns of quality, safety and quantity.**

## 2. SCOPE

**This Work Instruction covers the Standard Operating Procedures (SOP) of all conventional ovens being used at all facilities of Rose Excellence Corporation.**

## 3. DEFINITION OF TERMS

| TERMS | DEFINITION |
|---|---|
| Power Cord | A cord connected to the machine and is used to Power it ON or OFF. |
| Exhaust Lever | A lever that can be pushed or pull to regulate heat. |
| Control Panel | Located at the right hand of the machine where controls can be set. |
| Temperature Controller | A panel that can adjust the temperature. |
| Timer | A device that can adjust time for cooking. |
| Gas Valve | Used to turn ON or OFF gas. |

## 4. TURNING ON PROCEDURE

| ILLUSTRATION | CRITICAL PARAMETER | RESPONSIBLE |
|---|---|---|
| | Plug in the power cord at a safe convenience outlet. Ensure no breakage, exposed wirings before plugging the power cord. Ensure terminal wires are properly connected on the male prong and not loose. | Operator |

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.

| ILLUSTRATION | CRITICAL PARAMETER | RESPONSIBLE |
|---|---|---|
| 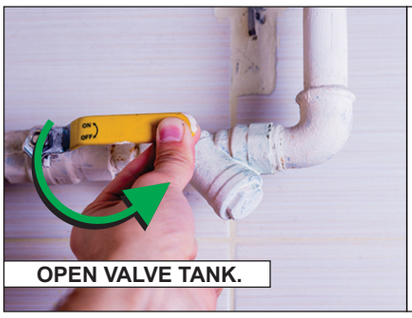 | Open the valve of the gas tank at 1/4 open. Ensure no leak sound on the hose and regulator and no excessive gas smell upon pening of the valve. Ensure that the gas tank is still heavy upon operation. | Operator |
| | Push exhaust lever to cover exhaust port. Ensure levers are functioning on all decks accordingly. | Operator |
| | Set the temperature controller according to desired temperature. Ensure the temperature control starts from 0 degrees Celsius. this applies to both upper and lower temperature panels for all the decks. | Operator |
| | Verify that the timer set is correct. If the timer is analog, ensure that it is set and properly aligned so accurate time can be achieved. | Operator |

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.

| ILLUSTRATION | CRITICAL PARAMETER | RESPONSIBLE |
|---|---|---|
| 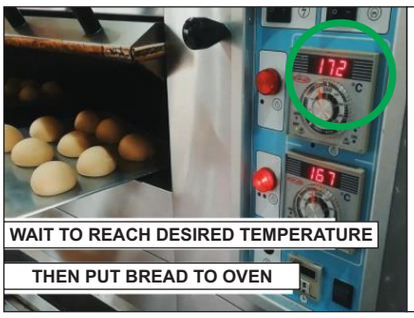 | **Check that the temperature is reached before placing the product inside the oven chamber. Close the oven door properly.** | **Operator** |
| | **Be mindful of the alarm of the oven. Once time is reached, buzzer will alarm.** | **Operator** |
| | **Ensure to properly Turn OFF the timer. Remove the products immediately to avoid over baking.** | **Operator** |

## 5. TURNING OFF PROCEDURE

| ILLUSTRATION | CRITICAL PARAMETER | RESPONSIBLE |
|---|---|---|
| 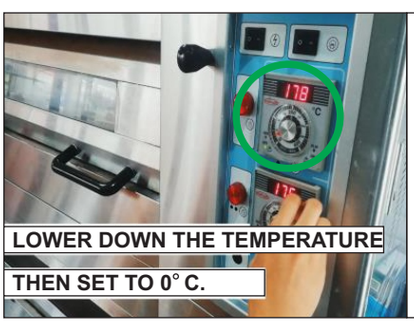 | **After baking, ensure to rotate the dial gauge of control panel to 0 degrees celsius. Ensure the pointer is set to zero.** | **Operator** |

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.

| ILLUSTRATION | CRITICAL PARAMETER | RESPONSIBLE |
|---|---|---|
| 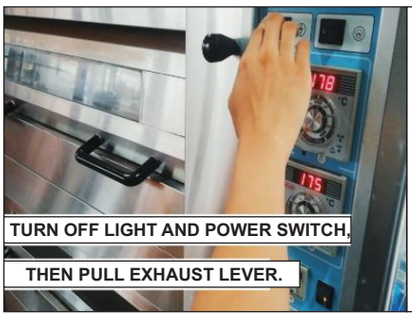 | **Ensure that the exhaust lever is pulled out to let the hot air inside the chamber to dissipate. Ensure to porperly turn OFF the temperature controller, timer and light.** | **Operator** |
| | **Leave the cover open to avoid oil build up on glass oven door.** | **Operator** |
| | **Ensure to properly unplug the power cord from the outlet.** | **Operator** |
| | **Ensure that the gas valve is properly turned OFF by rotating the lever clockwise.** | **Operator** |

Any hard copy of this document without the signed first page or unprotected soft copy is regarded as an uncontrolled copy. No part of the publication should be used or reproduced in any form or by any means, or stored in a database or retrieval without prior written permission of the Quality Management Representative.