
Aug.1.2026 Copyright 2026 HIROSE ELECTRIC CO., LTD. All Rights Reserved.
In case of consideration for using Automotive equipment / device which demand high reliability, kindly contact our sales window correspondents.

HRS DRAWING FOR REFERENCE

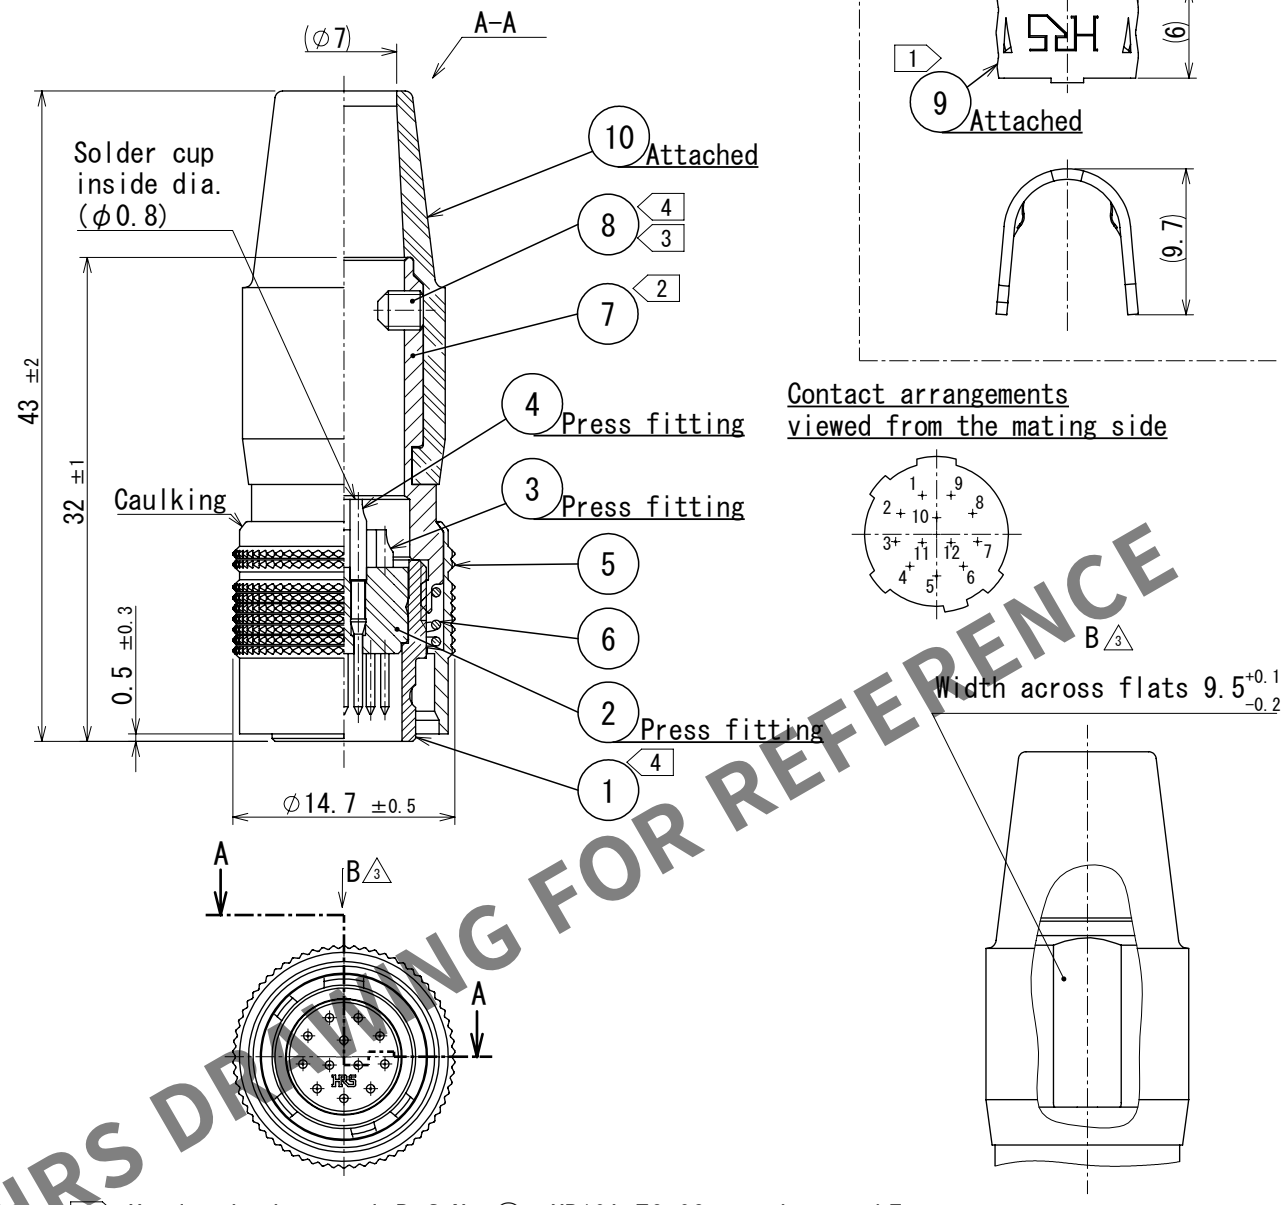

Notes
1. Hand crimping tool, Ref.No.⑨: HR10A-TC-02, apply to φ7.
2. The recommended clamp torque, Ref.No.⑦ : 2 to 2.5 N・m.
3. Across flats hexagon head of Ref.No. ⑧ : 1.27
   The recommended clamp torque, Ref.No. ⑧ : 0.3 to 0.4 N・m.
4. Loctite 263, Henkel Japan or equivalent applies to prevent Ref.No.①
   and ⑧ for loosening.
5. One example of the rotation of Ref.No.⑦ to Ref.No.① is shown.
6. The assembly this product applies to the manual ETAD-C0354-00.

△3 CAD change

NO.	MATERIAL	FINISH , REMARKS	NO.	MATERIAL	FINISH , REMARKS
5	Brass	Matte finish nickel plating	10	Chloroprene rubber	(Black)
4	Brass	Silver plating 2μm min.	9	Brass	
3	Brass	Silver plating 2μm min.	8	Steel	Nickel plating JIS B 1177, Hexagon socket set screw M2.6×0.45×3
2	Polyamide	(Black) UL94V-0	7	Brass	Nickel plating
1	Zinc alloy	Matte finish nickel plating	6	Steel	Nickel plating

UNITS	SCALE		COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
mm	2:1	△3	4	DIS-C-00019773	TY.SUZUKI	HY.KOBAYASHI	2025.04.25

HIROSE ELECTRIC CO., LTD.

APPROVED :	MR.YOSHIDA	2005.01.05
CHECKED :	MO.SATOH	2005.01.05
DESIGNED :	YH.YAMADA	2005.01.05
DRAWN :	YH.YAMADA	2005.01.05

DRAWING NO. EDC-010386-73-73
PART NO. HR10A-10P-12P(73)
CODE NO. CL0110-0401-7-73
△3 1/1

FORM HC0011-5