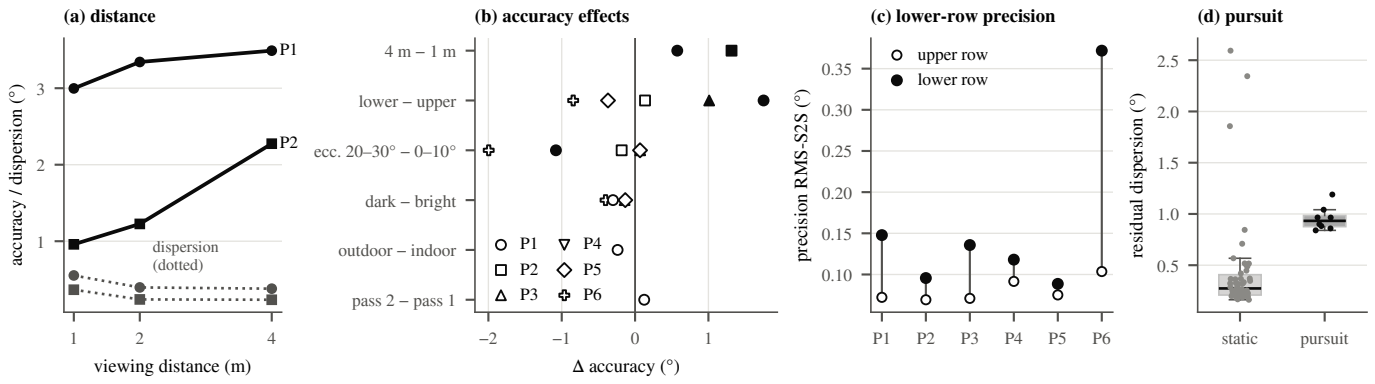
(a) distance
accuracy / dispersion (°)
P1
P2
dispersion
(dotted)
1
2
3
1
2
4
viewing distance (m)
(b) accuracy effects
4 m – 1 m
lower – upper
ecc. 20–30° – 0–10°
dark – bright
outdoor – indoor
pass 2 – pass 1
P1
P2
P3
P4
P5
P6
−2
−1
0
1
Δ accuracy (°)
(c) lower-row precision
upper row
lower row
precision RMS-S2S (°)
0.10
0.15
0.20
0.25
0.30
0.35
P1
P2
P3
P4
P5
P6
(d) pursuit
residual dispersion (°)
0.5
1.0
1.5
2.0
2.5
static
pursuit