

```

Aug 25 09:07:30.168: %SYS-5-CONFIG_I: Configured from console by console
R1#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

10.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
   10.0.0.0/8 is directly connected, Ethernet0/0
   10.0.0.1/32 is directly connected, Ethernet0/0
15.0.0.0/8 [1/0] via 20.0.0.2
20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
   20.0.0.0/8 is directly connected, Ethernet0/1
   20.0.0.1/32 is directly connected, Ethernet0/1
162.14.0.0/16 [1/0] via 20.0.0.2
R1#write memory

```

```

21.0.0.0/8 is directly connected, Ethernet0/2
21.0.0.1/32 is directly connected, Ethernet0/2
30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
   30.0.0.0/8 is directly connected, Ethernet0/0
   30.0.0.2/32 is directly connected, Ethernet0/0
162.14.0.0/16 [1/0] via 21.0.0.2
172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
   172.19.0.0/16 is directly connected, Ethernet0/1
   172.19.0.1/32 is directly connected, Ethernet0/1
R3#
R3#
R3#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R3(config)#ip route 10.0.0.0 255.0.0.0 30.0.0.1
R3(config)#exit
R3#
R3#
Aug 25 09:29:00.544: %SYS-5-CONFIG_I: Configured from console by console
R3#write memory
Building configuration...
[OK]
R3#
R3#

```

```

R2#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 20.0.0.1
S    15.0.0.0/8 [1/0] via 30.0.0.2
C    20.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
   C    20.0.0.0/8 is directly connected, Ethernet0/0
   L    20.0.0.2/32 is directly connected, Ethernet0/0
   C    30.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
   C    30.0.0.0/8 is directly connected, Ethernet0/1
   L    30.0.0.1/32 is directly connected, Ethernet0/1
S    162.14.0.0/16 [1/0] via 30.0.0.2
R2#

```

```

[OK]
R4#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PfR

Gateway of last resort is not set

S    10.0.0.0/8 [1/0] via 172.19.0.1
C    15.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
   C    15.0.0.0/8 is directly connected, Ethernet0/0
   L    15.0.0.1/32 is directly connected, Ethernet0/0
S    162.14.0.0/16 [1/0] via 172.19.0.1
C    172.19.0.0/16 is variably subnetted, 2 subnets, 2 masks
   C    172.19.0.0/16 is directly connected, Ethernet0/1
   L    172.19.0.2/32 is directly connected, Ethernet0/1
R4#
R4#

```

1. The first step in the process is to identify the problem.

2. The second step is to gather information about the problem.

3. The third step is to analyze the information and identify the causes of the problem.

4. The fourth step is to develop a plan to solve the problem.

5. The fifth step is to implement the plan and monitor the results.

6. The sixth step is to evaluate the results and make adjustments as needed.

7. The seventh step is to document the process and results.

8. The eighth step is to share the results with others.

9. The ninth step is to review the process and make improvements.

10. The tenth step is to conclude the process.

11. The eleventh step is to evaluate the results and make adjustments as needed.

12. The twelfth step is to document the process and results.

13. The thirteenth step is to share the results with others.


14. The fourteenth step is to review the process and make improvements.

15. The fifteenth step is to conclude the process.

16. The sixteenth step is to evaluate the results and make adjustments as needed.

17. The seventeenth step is to document the process and results.

18. The eighteenth step is to share the results with others.

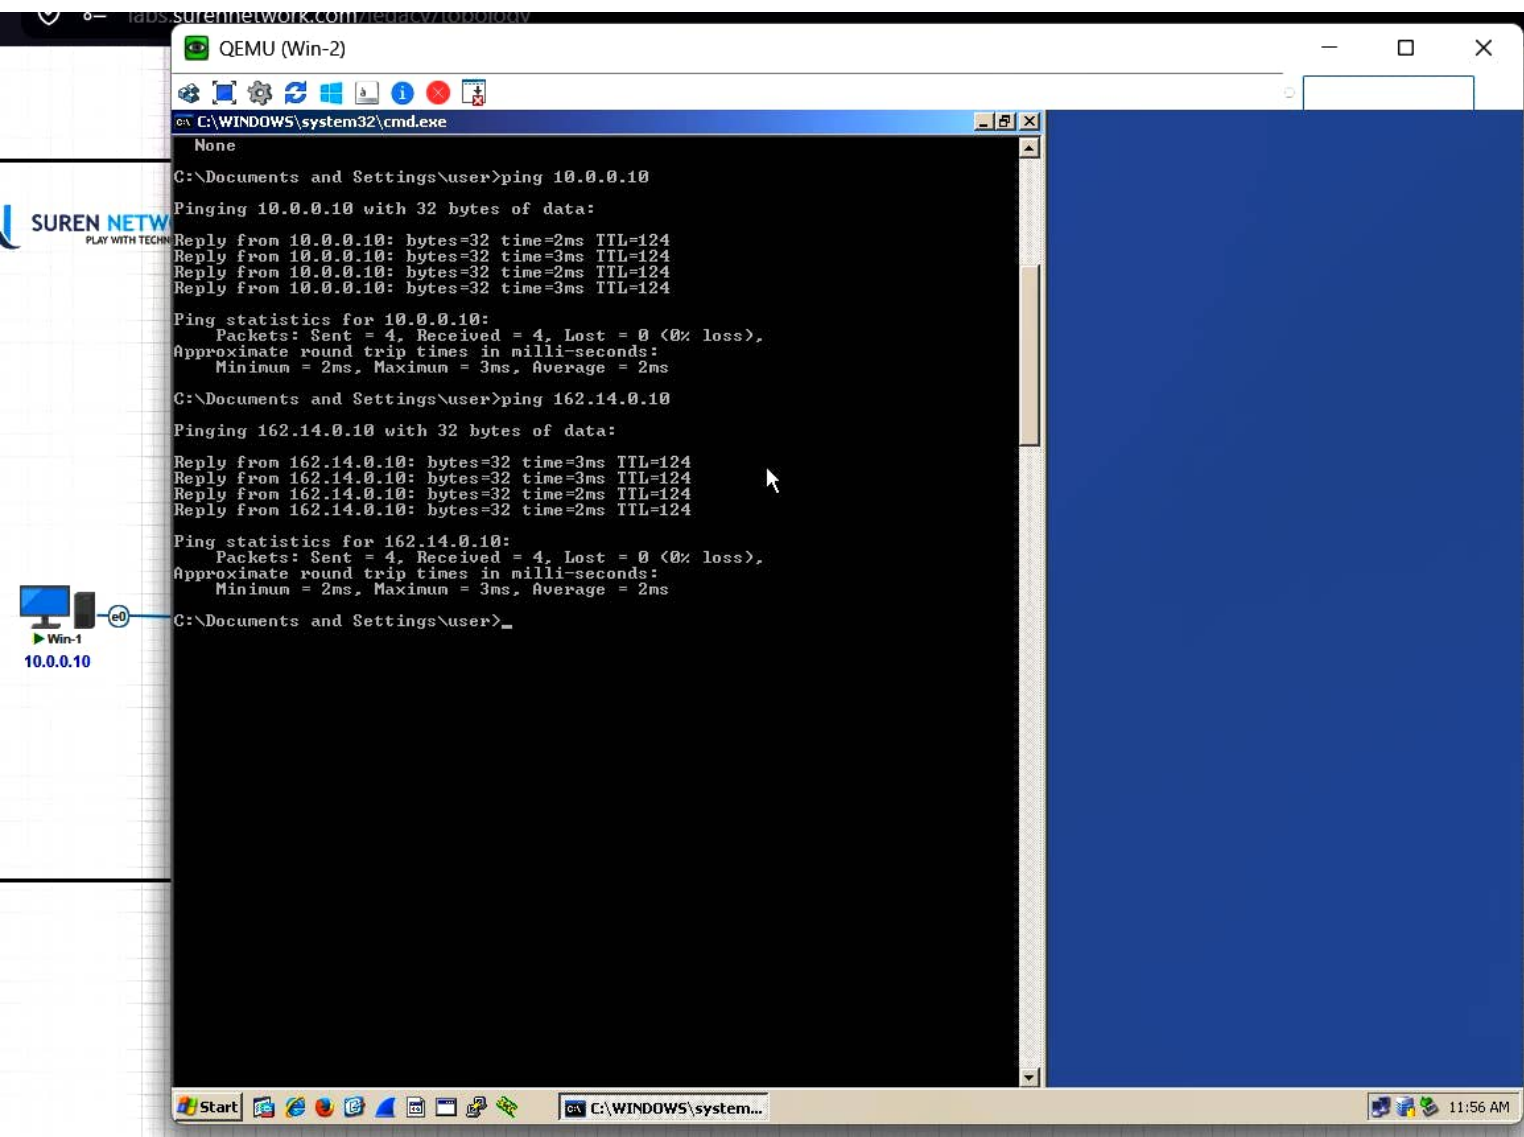

```
QEMU (Win-3)
C:\WINDOWS\system32\cmd.exe
Approximate round trip times in milli-seconds:
  Minimum = 0ms, Maximum = 0ms, Average = 0ms
C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Request timed out.
Request timed out.
Request timed out.
Request timed out.


Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 0, Lost = 4 (100% loss),

C:\Documents and Settings\user>ping 10.0.0.10
Pinging 10.0.0.10 with 32 bytes of data:
Reply from 10.0.0.10: bytes=32 time=3ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123
Reply from 10.0.0.10: bytes=32 time=3ms TTL=123
Reply from 10.0.0.10: bytes=32 time=2ms TTL=123

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
      Minimum = 2ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>ping 15.0.0.10
Pinging 15.0.0.10 with 32 bytes of data:
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=3ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124
Reply from 15.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 15.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
      Minimum = 2ms, Maximum = 3ms, Average = 2ms
C:\Documents and Settings\user>
```

te requires that you restart your

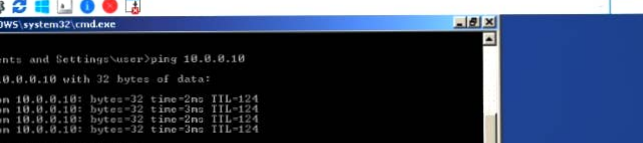

The screenshot shows a Windows command prompt window titled "QEMU (Win-2)". The window has a standard Windows taskbar at the top with icons for File Explorer, Edge, and other applications. The command prompt shows the following output:

```
C:\WINDOWS\system32\cmd.exe
None

C:\Documents and Settings\user>ping 10.0.0.10

Pinging 10.0.0.10 with 32 bytes of data:

Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124
Reply from 10.0.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 10.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>ping 162.14.0.10

Pinging 162.14.0.10 with 32 bytes of data:

Reply from 162.14.0.10: bytes=32 time=3ms TTL=124
Reply from 162.14.0.10: bytes=32 time=3ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124
Reply from 162.14.0.10: bytes=32 time=2ms TTL=124

Ping statistics for 162.14.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 2ms, Maximum = 3ms, Average = 2ms

C:\Documents and Settings\user>
```