


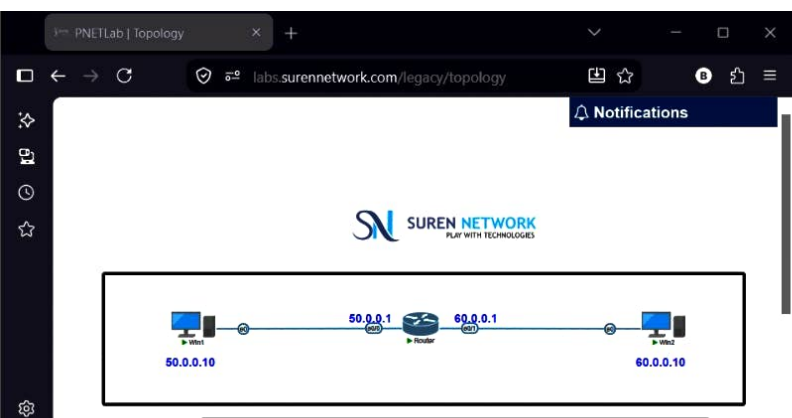

Router

```
Router#
Router#
*Aug 26 10:25:53.460: %SYS-5-CONFIG_I: Configured from console by console
Router#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
       E1 - OSPF external type 1, E2 - OSPF external type 2
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
       ia - IS-IS inter area, * - candidate default, U - per-user static route
       o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
       a - application route
       + - replicated route, % - next hop override, p - overrides from PFR

Gateway of last resort is not set

50.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       50.0.0.0/8 is directly connected, Ethernet0/0
L       50.0.0.1/32 is directly connected, Ethernet0/0
60.0.0.0/8 is variably subnetted, 2 subnets, 2 masks
C       60.0.0.0/8 is directly connected, Ethernet0/1
L       60.0.0.1/32 is directly connected, Ethernet0/1
Router#
```

QEMU (Win1)

```
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 50.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 50.0.0.1

C:\Documents and Settings\User>ping 60.0.0.10

Pinging 60.0.0.10 with 32 bytes of data:

Reply from 60.0.0.10: bytes=32 time=3ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127
Reply from 60.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 60.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 0ms, Maximum = 3ms, Average = 1ms
C:\Documents and Settings\User>
```

QEMU (Win2)

```
C:\WINDOWS\system32\cmd.exe
Windows IP Configuration

Ethernet adapter Local Area Connection:

    Connection-specific DNS Suffix  . : 
    IP Address. . . . . : 60.0.0.10
    Subnet Mask . . . . . : 255.0.0.0
    Default Gateway . . . . . : 60.0.0.1

C:\Documents and Settings\User>ping 50.0.0.10

Pinging 50.0.0.10 with 32 bytes of data:

Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127
Reply from 50.0.0.10: bytes=32 time=1ms TTL=127

Ping statistics for 50.0.0.10:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
    Approximate round trip times in milli-seconds:
        Minimum = 1ms, Maximum = 1ms, Average = 1ms
C:\Documents and Settings\User>
```

PNETLab | Topology

labs.surennetwork.com/legacy/topology

Notifications

SN SUREN NETWORK
PLAY WITH TECHNOLOGIES

50.0.0.10

50.0.0.1

Router

60.0.0.1

60.0.0.10

News for you
Sensex gains 30...

Search

ENG IN

03:52 PM
26-08-2026

QEMU (Win2)

My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\User>ncpa.cpl

C:\Documents and Settings\User>

QEMU (Win1)

My Documents

My Computer

My Network Places

Recycle Bin

Internet Explorer

C:\WINDOWS\system32\cmd.exe

Microsoft Windows XP [Version 5.1.2600]
(C) Copyright 1985-2001 Microsoft Corp.

C:\Documents and Settings\User>