


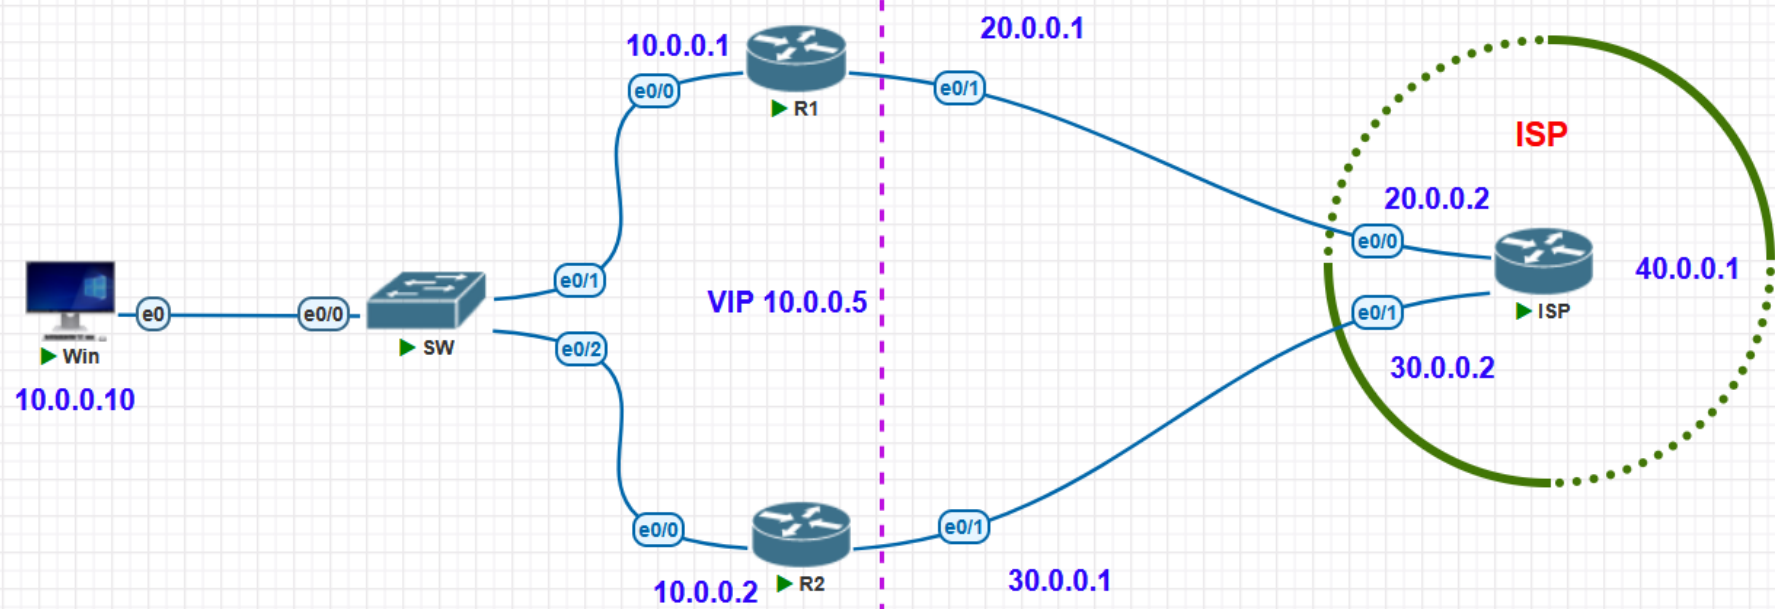

The screenshot displays a QEMU virtual machine window titled "QEMU (Win)". Inside the VM, a Windows 7 desktop is visible. A command prompt window is open, showing the following commands and output:

```
R2
R2(config-if)#exit
R2(config)#exit
R2#
R2#
R2#
R2#sh
*Sep 25 09:40:31.169: %SYS-5
R2#sh standby
Ethernet0/0 - Group 1
  State is Speak
  Virtual IP address is 10.0.0.1
  Active virtual MAC address
  Local virtual MAC address
  Hello time 3 sec, hold time
  Next hello sent in 0.080
  Preemption disabled
  Active router is 10.0.0.1,
  Standby router is unknown
  Priority 100 (default 100)
  Group name is "hsrp-Et0/0-
R2#
*Sep 25 09:40:44.396: %HSRP-
db
R2#
```

The output of the ping command is shown below:

```
Ping statistics for 40.0.0.1:
  Packets: Sent = 50, Received = 47, Lost = 3 (6% loss),
  Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 3ms, Average = 1ms
C:\Documents and Settings\user>
```

On the right side of the VM window, a network diagram is visible. It shows a router labeled "ISP" with a blue icon. The router is connected to a virtual network represented by a green dotted circle. The IP address 40.0.0.1 is shown in blue text next to the router, and 40.0.0.2 is shown in blue text on the left side of the circle. The text "ISP" is also shown in red text above the router.

```

R2#
R2#
R2#sh standby summary
^
Invalid input detected at '^' marker.

R2#sh standby
Ethernet0/0 - Group 1
  State is Active
    2 state changes, last state change 00:00:34
  Virtual IP address is 10.0.0.5
  Active virtual MAC address is 0000.0c07.ac01
    Local virtual MAC address is 0000.0c07.ac01 (v1 default)
  Hello time 3 sec, hold time 10 sec
    Next hello sent in 1.152 secs
  Preemption disabled
  Active router is local
  Standby router is unknown
  Priority 100 (default 100)
  Group name is "hsrp-Et0/0-1" (default)
R2#

```

```

R1>
R1>
R1>
R1>
R1>enable
R1#sh standby br
R1#show standby
R1#conf t
Enter configuration commands, one per line. End with CNTL/Z.
R1(config)#int e0/0
R1(config-if)#standby 1 ip 10.0.0.5
R1(config-if)#exit
R1(config)#exit
R1#
R1#
R1#
R1#
R1#sh
*Sep 25 10:08:34.087: %SYS-5-CONFIG_I: Configured from console by console
R1#sh standby
Ethernet0/0 - Group 1
  State is Speak
  Virtual IP address is 10.0.0.5
  Active virtual MAC address is 0000.0c07.ac01
    Local virtual MAC address is 0000.0c07.ac01 (v1 default)
  Hello time 3 sec, hold time 10 sec
    Next hello sent in 0.064 secs
  Preemption disabled
  Active router is 10.0.0.2, priority 100 (expires in 9.696 sec)
  Standby router is unknown
  Priority 100 (default 100)
  Group name is "hsrp-Et0/0-1" (default)
R1#sh standby br
          P indicates configured to preempt.
          |
Interface  Grp  Pri  P State   Active    Standby    Virtual IP
Et0/0      1   100   P Speak   10.0.0.2   unknown    10.0.0.5
R1#
*Sep 25 10:08:51.277: %HSRP-5-STATECHANGE: Ethernet0/0 Grp 1 state Speak -> Standby
R1#

```