1. Description

1.1. Project

Project Name	CO_BIEN_Presence_detector
Board Name	custom
Generated with:	STM32CubeMX 6.15.0
Date	11/26/2025
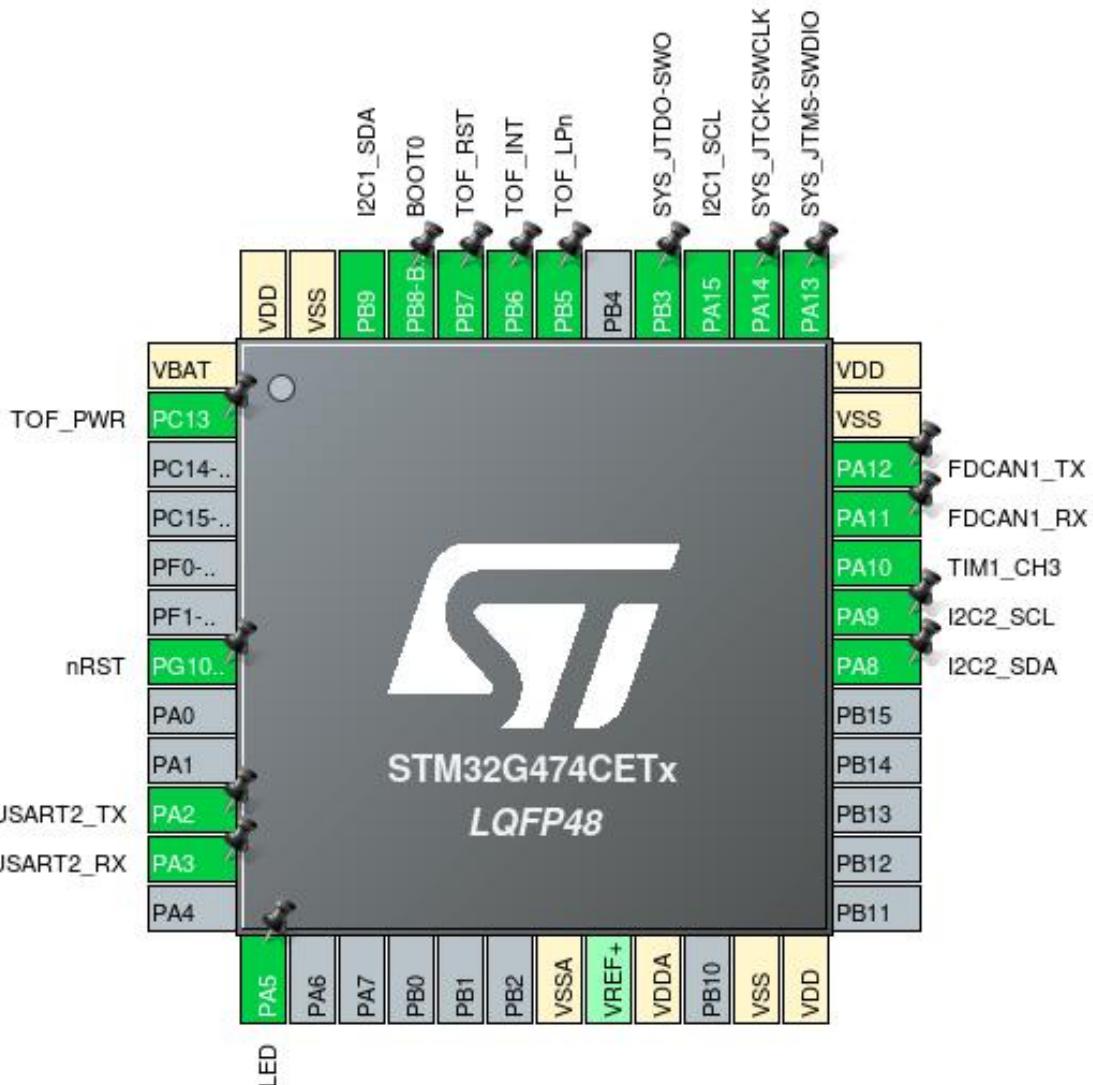
1.2. MCU

MCU Series	STM32G4
MCU Line	STM32G4x4
MCU name	STM32G474CETx
MCU Package	LQFP48
MCU Pin number	48

1.3. Core(s) information

Core(s)	ARM Cortex-M4

2. Pinout Configuration
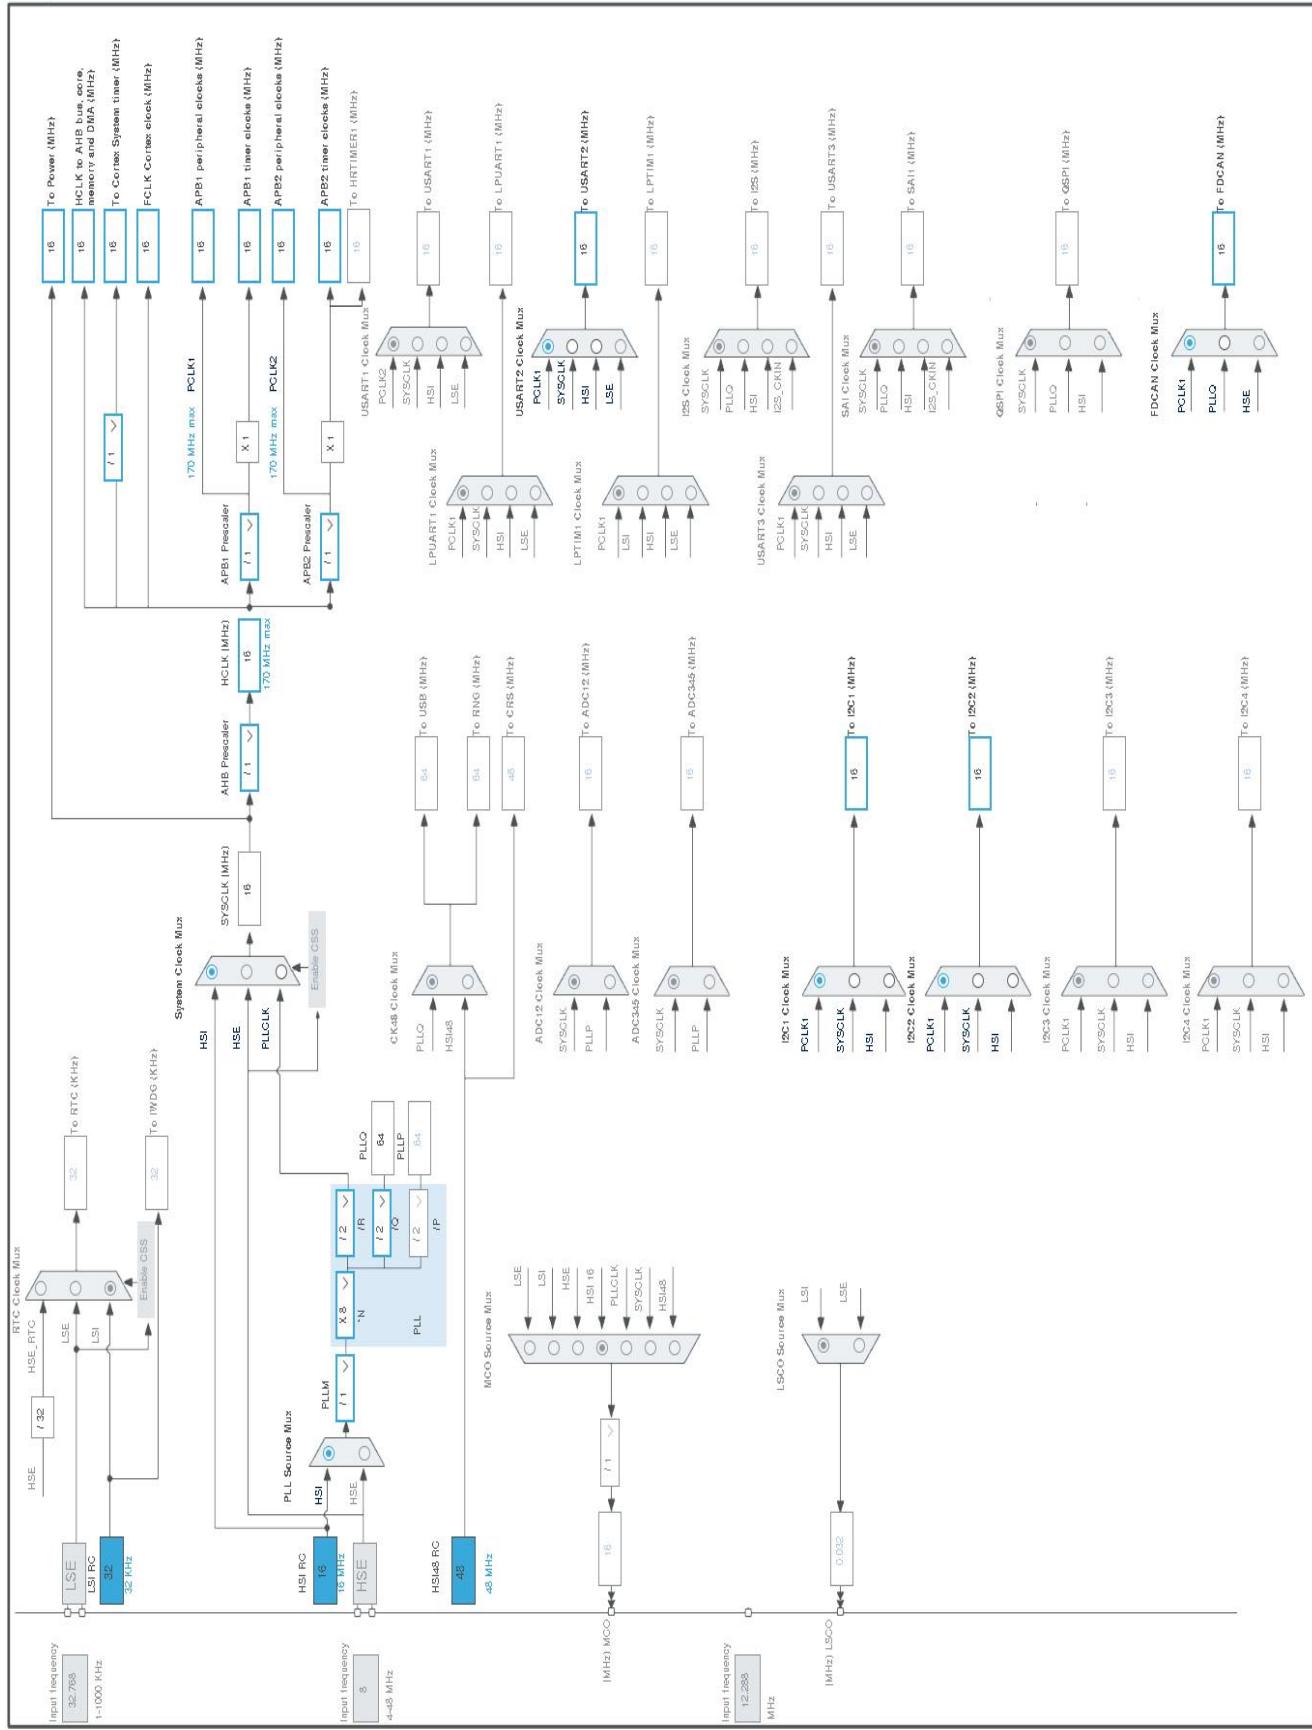
3. Pins Configuration

Pin Number LQFP48	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
1	VBAT	Power		
2	PC13 *	I/O	GPIO_Output	TOF_PWR
7	PG10-NRST *	I/O	GPIO_Input	nRST
10	PA2	I/O	USART2_TX	
11	PA3	I/O	USART2_RX	
13	PA5 *	I/O	GPIO_Output	LED
19	VSSA	Power		
21	VDDA	Power		
23	VSS	Power		
24	VDD	Power		
30	PA8	I/O	I2C2_SDA	
31	PA9	I/O	I2C2_SCL	
32	PA10	I/O	TIM1_CH3	
33	PA11	I/O	FDCAN1_RX	
34	PA12	I/O	FDCAN1_TX	
35	VSS	Power		
36	VDD	Power		
37	PA13	I/O	SYS_JTMS-SWDIO	
38	PA14	I/O	SYS_JTCK-SWCLK	
39	PA15	I/O	I2C1_SCL	
40	PB3	I/O	SYS_JTDO-SWO	
42	PB5 *	I/O	GPIO_Output	TOF_LPn
43	PB6	I/O	GPIO_EXTI6	TOF_INT
44	PB7 *	I/O	GPIO_Output	TOF_RST
45	PB8-BOOT0 *	I/O	GPIO_Input	BOOT0
46	PB9	I/O	I2C1_SDA	
47	VSS	Power		
48	VDD	Power		

 * The pin is affected with an I/O function

4. Clock Tree Configuration

1. Power Consumption Calculator report

1.1. Microcontroller Selection

Series	STM32G4
Line	STM32G4x4
MCU	STM32G474CETx
Datasheet	DS12288_Rev0

1.2. Parameter Selection

Temperature	25
Vdd	3.0

1.3. Battery Selection

Battery	Li-SOCL2(A3400)
Capacity	3400.0 mAh
Self Discharge	0.08 %/month
Nominal Voltage	3.6 V
Max Cont Current	100.0 mA
Max Pulse Current	200.0 mA
Cells in series	1
Cells in parallel	1
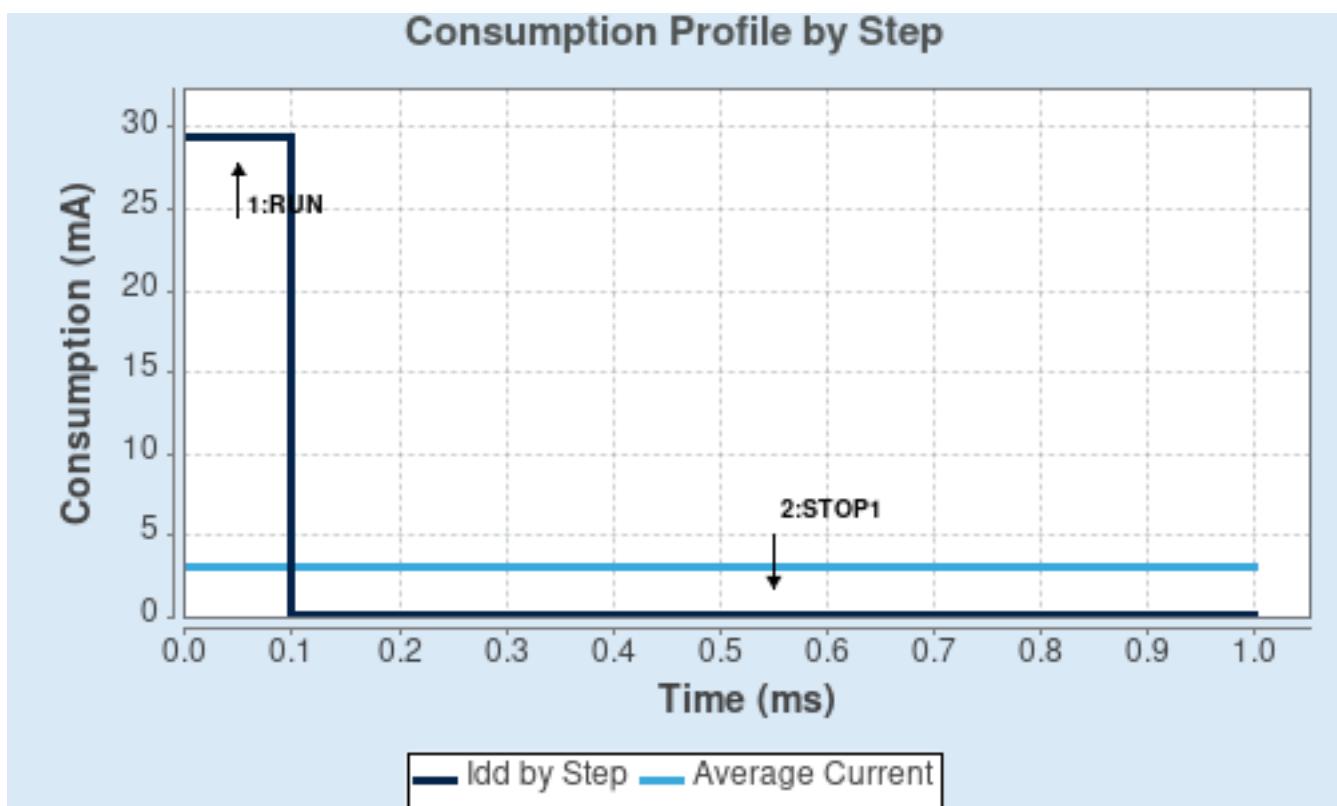
1.4. Sequence

Step	Step1	Step2
Mode	RUN	STOP1
Vdd	3.0	3.0
Voltage Source	Battery	Battery
Range	Range1-Boost	NoRange
Fetch Type	FLASH/DualBank/ART	NA
CPU Frequency	170 MHz	0 Hz
Clock Configuration	HSE BYP PLL	ALL CLOCKS OFF
Clock Source Frequency	4 MHz	0 Hz
Peripherals		
Additional Cons.	0 mA	0 mA
Average Current	29.5 mA	80.5 µA
Duration	0.1 ms	0.9 ms
DMIPS	213.0	0.0
Ta Max	123.36	129.98
Category	In DS Table	In DS Table

1.5. Results

Sequence Time	1 ms	Average Current	3.02 mA
Battery Life	1 month, 16 days, 9 hours	Average DMIPS	212.5 DMIPS

1.6. Chart

Consumption Profile by Step

2. Software Project

2.1. Project Settings

Name	Value
Project Name	CO_BIEN_Presence_detector
Project Folder	/home/phifo/Nextcloud/Boulot/Projets/Cobien/Softwares/CO_BIEN_Presence_det
Toolchain / IDE	STM32CubeIDE
Firmware Package Name and Version	STM32Cube FW_G4 V1.6.1
Application Structure	Advanced
Generate Under Root	Yes
Do not generate the main()	No
Minimum Heap Size	0x200
Minimum Stack Size	0x400

2.2. Code Generation Settings

Name	Value
STM32Cube MCU packages and embedded software	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Keep User Code when re-generating	Yes
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No
Enable Full Assert	No

2.3. Advanced Settings - Generated Function Calls

Rank	Function Name	Peripheral Instance Name
1	SystemClock_Config	RCC
2	MX_GPIO_Init	GPIO
3	MX_DMA_Init	DMA
4	MX_FDCAN1_Init	FDCAN1
5	MX_I2C2_Init	I2C2
6	MX_USART2_UART_Init	USART2
7	MX_TIM1_Init	TIM1
8	MX_I2C1_Init	I2C1

3. Peripherals and Middlewares Configuration

3.1. FDCAN1

mode: Activated

3.1.1. Parameter Settings:

Basic Parameters:

Clock Divider	Divide kernel clock by 1
Frame Format	Classic mode
Mode	Normal mode
Auto Retransmission	Disable
Transmit Pause	Disable
Protocol Exception	Disable
Nominal Sync Jump Width	1
Data Prescaler	1
Data Sync Jump Width	1
Data Time Seg1	1
Data Time Seg2	1
Std Filters Nbr	0
Ext Filters Nbr	0
Tx Fifo Queue Mode	FIFO mode

Bit Timings Parameters:

Nominal Prescaler	**8 ***
Nominal Time Quantum	**500.0 ***
Nominal Time Seg1	1
Nominal Time Seg2	**2 ***
Nominal Time for one Bit	**2000 ***
Nominal Baud Rate	**500000 ***

3.2. I2C1

I2C: I2C

3.2.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	100
Fall Time (ns)	100

Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	**0x00503D58 ***

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.3. I2C2
I2C: I2C
3.3.1. Parameter Settings:

Timing configuration:

Custom Timing	Disabled
I2C Speed Mode	Standard Mode
I2C Speed Frequency (KHz)	100
Rise Time (ns)	100
Fall Time (ns)	100
Coefficient of Digital Filter	0
Analog Filter	Enabled
Timing	**0x00503D58 ***

Slave Features:

Clock No Stretch Mode	Disabled
General Call Address Detection	Disabled
Primary Address Length selection	7-bit
Dual Address Acknowledged	Disabled
Primary slave address	0

3.4. RCC
3.4.1. Parameter Settings:

System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Disabled
Data Cache	Enabled

Flash Latency(WS)	0 WS (1 CPU cycle)

RCC Parameters:

HSI Calibration Value	64
HSE Startup Timout Value (ms)	100
LSE Startup Timout Value (ms)	5000

Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1

Peripherals Clock Configuration:

Generate the peripherals clock configuration	TRUE

3.5. SYS

Debug: Trace Asynchronous Sw

Timebase Source: SysTick

mode: save power of non-active UCPD - deactive Dead Battery pull-up

3.6. TIM1

Channel3: PWM Generation CH3

3.6.1. Parameter Settings:

Counter Settings:

Prescaler (PSC - 16 bits value)	0
Counter Mode	Up
Dithering	Disable
Counter Period (AutoReload Register - 16 bits value)	65535
Internal Clock Division (CKD)	No Division
Repetition Counter (RCR - 16 bits value)	0
auto-reload preload	Disable

Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
Trigger Event Selection TRGO	Reset (UG bit from TIMx_EGR)
Trigger Event Selection TRGO2	Reset (UG bit from TIMx_EGR)

Break And Dead Time management - BRK Configuration:

BRK State	Disable
BRK Polarity	High
BRK Filter (4 bits value)	0
BRK Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable

- COMP3	Disable
- COMP4	Disable
- COMP5	Disable
- COMP6	Disable
- COMP7	Disable

Break And Dead Time management - BRK2 Configuration:

BRK2 State	Disable
BRK2 Polarity	High
BRK2 Filter (4 bits value)	0
BRK2 Sources Configuration	
- Digital Input	Disable
- COMP1	Disable
- COMP2	Disable
- COMP3	Disable
- COMP4	Disable
- COMP5	Disable
- COMP6	Disable
- COMP7	Disable

Break And Dead Time management - Output Configuration:

Automatic Output State	Disable
Off State Selection for Run Mode (OSSR)	Disable
Off State Selection for Idle Mode (OSSI)	Disable
Lock Configuration	Off

Clear Input:

Clear Input Source	Disable

PWM Generation Channel 3:

Mode	PWM mode 1
Pulse (16 bits value)	0
Output compare preload	Enable
Fast Mode	Disable
CH Polarity	High
CH Idle State	Reset

3.7. USART2

Mode: Asynchronous

3.7.1. Parameter Settings:

Basic Parameters:

Baud Rate	115200
Word Length	8 Bits (including Parity)

Parity	None
Stop Bits	1

Advanced Parameters:

Data Direction	Receive and Transmit
Over Sampling	16 Samples
Single Sample	Disable
ClockPrescaler	1
Fifo Mode	Disable
Txfifo Threshold	1 eighth full configuration
Rxfifo Threshold	1 eighth full configuration

Advanced Features:

Auto Baudrate	Disable
TX Pin Active Level Inversion	Disable
RX Pin Active Level Inversion	Disable
Data Inversion	Disable
TX and RX Pins Swapping	Disable
Overrun	Enable
DMA on RX Error	Enable
MSB First	Disable

* User modified value

4. System Configuration

4.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
FDCAN1	PA11	FDCAN1_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA12	FDCAN1_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
I2C1	PA15	I2C1_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Low	
	PB9	I2C1_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Low	
I2C2	PA8	I2C2_SDA	Alternate Function Open Drain	No pull-up and no pull-down	Low	
	PA9	I2C2_SCL	Alternate Function Open Drain	No pull-up and no pull-down	Low	
SYS	PA13	SYS_JTMS-SWDIO	n/a	n/a	n/a	
	PA14	SYS_JTCK-SWCLK	n/a	n/a	n/a	
	PB3	SYS_JTDO-SWO	n/a	n/a	n/a	
TIM1	PA10	TIM1_CH3	Alternate Function Push Pull	No pull-up and no pull-down	Low	
USART2	PA2	USART2_TX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PA3	USART2_RX	Alternate Function Push Pull	No pull-up and no pull-down	Low	
GPIO	PC13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TOF_PWR
	PG10-NRST	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	nRST
	PA5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	LED
	PB5	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TOF_LPn
	PB6	GPIO_EXTI6	External Interrupt Mode with Rising edge trigger detection	No pull-up and no pull-down	n/a	TOF_INT
	PB7	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	TOF_RST
	PB8-BOOT0	GPIO_Input	Input mode	No pull-up and no pull-down	n/a	BOOT0

4.2. DMA configuration

DMA request	Stream	Direction	Priority
TIM1_CH3	DMA1_Channel1	Peripheral To Memory	Low

TIM1_CH3: DMA1_Channel1 DMA request Settings:

Mode:	Normal
Peripheral Increment:	Disable
Memory Increment:	**Enable ***
Peripheral Data Width:	Half Word
Memory Data Width:	Half Word

4.3. NVIC configuration

4.3.1. NVIC

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Prefetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	15	0
DMA1 channel1 global interrupt	true	0	0
PVD/PVM1/PVM2/PVM3/PVM4 interrupts through EXTI lines 16/38/39/40/41	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
FDCAN1 interrupt 0	unused		
FDCAN1 interrupt 1	unused		
EXTI line[9:5] interrupts	unused		
TIM1 break interrupt and TIM15 global interrupt	unused		
TIM1 update interrupt and TIM16 global interrupt	unused		
TIM1 trigger and commutation interrupts and TIM17 global interrupt	unused		
TIM1 capture compare interrupt	unused		
I2C1 event interrupt / I2C1 wake-up interrupt through EXTI line 23	unused		
I2C1 error interrupt	unused		
I2C2 event interrupt / I2C2 wake-up interrupt through EXTI line 24	unused		
I2C2 error interrupt	unused		
USART2 global interrupt / USART2 wake-up interrupt through EXTI line 26	unused		
FPU global interrupt	unused		

4.3.2. NVIC Code generation

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Non maskable interrupt	false	true	false
Hard fault interrupt	false	true	false

Enabled interrupt Table	Select for init sequence ordering	Generate IRQ handler	Call HAL handler
Memory management fault	false	true	false
Prefetch fault, memory access fault	false	true	false
Undefined instruction or illegal state	false	true	false
System service call via SWI instruction	false	true	false
Debug monitor	false	true	false
Pendable request for system service	false	true	false
System tick timer	false	true	true
DMA1 channel1 global interrupt	false	true	true

* User modified value

5. System Views

5.1. Category view

5.1.1. Current

6. Docs & Resources

Type	Link
BSDL files	https://www.st.com/resource/en/bsdl_model/stm32g4_bsdl.zip
IBIS models	https://www.st.com/resource/en/ibis_model/stm32g4_ibis.zip
System View Description	https://www.st.com/resource/en/svd/stm32g4_svd.zip
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_embedded_software_solutions.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_eval-tools_portfolio.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32_stm8_functional-safety-packages.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-usb-c-pd-solutions-presentation.pdf
Presentations	https://www.st.com/resource/en/product_presentation/stm32-stm8_software_development_tools.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32-family-overview.pdf
Presentations	https://www.st.com/resource/en/product_presentation/microcontrollers-stm32g4-series-product-overview.pdf
Brochures	https://www.st.com/resource/en/brochure/products-and-solutions-for-plcs-and-smart-i-os.pdf
Brochures	https://www.st.com/resource/en/brochure/expansion-boards-for-intelligent-power-switches.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32g4.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32nucleo.pdf
Flyers	https://www.st.com/resource/en/flyer/flstm32trust.pdf
Flyers	https://www.st.com/resource/en/flyer/flpowerstbd.pdf
Flyers	https://www.st.com/resource/en/flyer/fldpstpfc11120.pdf
Security Bulletin	https://www.st.com/resource/en/technical_note/tn1489-security-bulletin-tn1489stpsirt-physical-attacks-on-stm32-and-stm32cube-firmware-

stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an1709-emc-design-guide-for-stm8-stm32-and-legacy-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3126-audio-and-waveform-generation-using-the-dac-in-stm32-products-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3155-usart-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an3156-usb-dfu-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4221-i2c-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4232-getting-started-with-analog-comparators-for-stm32f3-series-and-stm32g4-series-devices-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4286-spi-protocol-used-in-the-stm32-bootloader-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4296-use-stm32f3stm32g4-ccm-sram-with-iar-embedded-workbench-keil-mdkarm-stmicroelectronics-stm32cubeide-and-other-gnubased-toolchains-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4539-hrtim-cookbook-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4655-virtually-increasing-the-number-of-serial-communication-peripherals-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4750-handling-of-soft-errors-in-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4776-generalpurpose-timer-cookbook-for-stm32-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4803-highspeed-si-simulations-using-ibis-and-boardlevel-simulations-using-hyperlynx-si-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4989-stm32-microcontroller-debug-toolbox-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5027-interfacing-pdm-digital-microphones-using-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5093-getting-started-with-stm32g4-series--hardware-development-boards-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5306-operational-amplifier-opamp-usage-in-stm32g4-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5310-guideline-for-using-analog-features-of-stm32g4-series-versus-stm32f3-series-devices-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5315-stm32cube-firmware-examples-for-stm32g4-series-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5346-stm32g4-adc-use-tips-and-recommendations-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5094-migrating-between-stm32f334303-lines-and-stm32g431xxg474xxg491xx-microcontrollers-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5738-stm32g4-series-lifetime-estimates-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4760-quadspi-interface-on-stm32-microcontrollers-and-microprocessors--stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4899-stm32-microcontroller-gpio-hardware-settings-and-lowpower-consumption-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5612-esd-protection-of-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5788-stm32-digital-power-pid-and-iir-filters-for-smps-control-design-and-comparison-on-bg414edpow1-discovery-kit-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4991-how-to-wake-

up-an-stm32-microcontroller-from-lowpower-mode-with-the-usart-or-the-lpuart-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4838-introduction-to-memory-protection-unit-management-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5325-how-to-use-the-cordic-to-perform-mathematical-functions-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5225-introduction-to-usb-typec-power-delivery-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4894-how-to-use-eeprom-emulation-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5537-how-to-use-adc-oversampling-techniques-to-improve-signaltonoise-ratio-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5036-guidelines-for-thermal-management-on-stm32-applications-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5405-how-to-use-fdcan-bootloader-protocol-on-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5978-introduction-to-mb1971-llc-hat-12-v-to-75-v1-a-for-f334-g474-nucleo-board-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an5690-how-to-use-vrefbuf-peripheral-on-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4230-introduction-to-random-number-generation-validation-using-the-nist-statistical-test-suite-for-stm32-mcus-and-mpus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an2548-introduction-to-dma-controller-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4013-introduction-to-timers-for-stm32-mcus-stmicroelectronics.pdf

Application Notes https://www.st.com/resource/en/application_note/an4277-how-to-use-

	pwm-shutdown-for-motor-control-and-digital-power-conversion-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4759-introduction-to-using-the-hardware-realtime-clock-rtc-and-the-tamper-management-unit-tamp-with-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4908-getting-started-with-usart-automatic-baud-rater-detection-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5156-introduction-to-security-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5224-introduction-to-dmamux-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5543-guidelines-for-enhanced-spi-communication-on-stm32-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5348-introduction-to-fdcan-peripherals-for-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/cd00211314-how-to-optimize-the-adc-accuracy-in-the-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2639-soldering-recommendations-and-package-information-for-leadfree-ecopack2-mcus-and-mpus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4566-how-to-extend-the-dac-performance-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an5647-the-goertzel-algorithm-to-compute-individual-terms-of-the-discrete-fourier-transform-dft-in-stm32-products-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an2606-introduction-to-system-memory-boot-mode-on-stm32-mcus-stmicroelectronics.pdf
Application Notes	https://www.st.com/resource/en/application_note/an4435-guidelines-for-

for related Tools & Software	obtaining-ulcsaiec-607301603351-class-b-certification-in-any-stm32-application-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4657-stm32-inapplication-programming-iap-using-the-usart-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4841-digital-signal-processing-for-stm32-microcontrollers-using-cmsis-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5056-integration-guide-for-the-xcubesbsfu-stm32cube-expansion-package-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5305-digital-filter-implementation-with-the-fmac-using-stm32cubeg4-mcu-package-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5315-stm32cube-firmware-examples-for-stm32g4-series-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5345-highbrightness-rgb-led-control-using-the-bg474edpow1-discovery-kit-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5360-getting-started-with-projects-based-on-the-stm32mp1-series-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5361-getting-started-with-projects-based-on-dualcore-stm32h7-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5394-getting-started-with-projects-based-on-the-stm32l5-series-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5418-how-to-build-a-simple-usbpd-sink-application-with-stm32cubemx-stmicroelectronics.pdf
Application Notes for related Tools	https://www.st.com/resource/en/application_note/an5426-migrating-graphics-middleware-projects-from-stm32cubemx-540-to-stm32cubemx-

& Software	550-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5464-position-control-of-a-threephase-permanent-magnet-motor-using-xcubemcsdk-or-xcubemcsdkful-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5564-getting-started-with-projects-based-on-dualcore-stm32wl-microcontrollers-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5698-adapting-the-xcubestl-functional-safety-package-for-stm32-iec-61508-compliant-to-other-safety-standards-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5731-stm32cubemx-and-stm32cubeide-threadsafe-solution-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5785-boost-voltage-mode-on-bg474edpow1-discovery-kit-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5788-stm32-digital-power-pid-and-iir-filters-for-smps-control-design-and-comparison-on-bg414edpow1-discovery-kit-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4502-stm32-smbuspmbus-expansion-package-for-stm32cube-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5952-how-to-use-cmake-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an4635-how-to-optimize-lpuart-power-consumption-on-stm32-mcus-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5054-how-to-perform-secure-programming-using-stm32cubeprogrammer-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5496-guidelines-for-the-buck-voltage-mode-on-the-bg474edpow1-discovery-kit-stmicroelectronics.pdf

Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an5497-introduction-to-the-buck-current-mode-with-the-bg474edpow1-discovery-kit-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an6179-how-to-integrate-the-stl-firmware-into-a-time-critical-user-application-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an6127-getting-started-with-stm32h7rx7sx-mcus-in-stm32cubeide-stmicroelectronics.pdf
Application Notes for related Tools & Software	https://www.st.com/resource/en/application_note/an6265-getting-started-with-stm32n6-mcus-in-stm32cubeide-stmicroelectronics.pdf
Errata Sheets	https://www.st.com/resource/en/errata_sheet/es0430-stm32g471xx473xx474xx483xx484xx-device-errata-stmicroelectronics.pdf
Datasheet	https://www.st.com/resource/en/datasheet/dm00431551.pdf
Programming Manuals	https://www.st.com/resource/en/programming_manual/pm0214-stm32-cortexm4-mcus-and-mpus-programming-manual-stmicroelectronics.pdf
Reference Manuals	https://www.st.com/resource/en/reference_manual/rm0440-stm32g4-series-advanced-armbased-32bit-mcus-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1163-description-of-wlcsp-for-microcontrollers-and-recommendations-for-its-use-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1204-tape-and-reel-shipping-media-for-stm32-microcontrollers-in-bga-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1205-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-fpn-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1206-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-qfp-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1207-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-so-packages-stmicroelectronics.pdf

Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1208-tape-and-reel-shipping-media-for-stm8-and-stm32-microcontrollers-in-tssop-and-ssop-packages-stmicroelectronics.pdf
Technical Notes & Articles	https://www.st.com/resource/en/technical_note/tn1433-reference-device-marking-schematics-for-stm32-microcontrollers-and-microprocessors-stmicroelectronics.pdf
User Manuals	https://www.st.com/resource/en/user_manual/um3167-stm32g4-series-ulcsaiec-607301603351-selftest-library-user-guide-stmicroelectronics.pdf