

Real Time Tempo Analysis of Drum Beats

Author: **Philip Hannant**, Supervisor: **Professor Steve Maybank**

Birkbeck, University of London
Department of Computer Science and Information Systems

Project Report
MSc Computer Science

September, 2016

This report is substantially the result of my own work, expressed in my own words, except where explicitly indicated in the text. I give my permission for it to be submitted to the JISC Plagiarism Detection Service. The report may be freely copied and distributed provided the source is explicitly acknowledged.

Abstract

This project report presents an investigation into the suitability of three beat detection algorithms to be used in a drumming training tool. The system captures live audio and passes it to the beat detection algorithms for tempo calculation. The tempo and the difference between the expected tempo is calculated returned to the user.

An extensive sample set of drum beats were created to replicate a drummer's performance. The samples were processed through the system and the calculated tempo results recorded. The collected data was then analysed and provided insights into which of the three beat detection algorithms could be used to form the basis for a future training tool.

Contents

Contents	3
1 Introduction and Background	6
1.1 Drumming Training Tools Background	6
1.2 Drum Musical Theory	8
1.2.1 Notation	8
1.2.2 Notes	8
1.2.3 Time Signatures	9
1.2.4 Playing Basics	9
1.3 Beat Detection Background	10
1.4 Project Aims	11
2 RTT_Analyser Beat Detection Algorithms	11
2.1 Beatroot	12
2.2 Discrete Wavelet Transform Beat Detection Method	14
2.3 Performance Worm	16
3 Solution Design and Architecture	16
3.1 Live Audio Processing	17
3.2 Akka Actors	18
3.2.1 The Actors	19
3.3 Design Pattern	20
4 Implementation	22
4.1 The Actor System	22
4.2 Live Audio Capture	24
4.3 DWT Beat Detection Implementation	24
4.4 Tempo, Analyser and Stats	25
4.5 JSON Parsing	26
4.6 Adaption of Beatroot	27
4.7 RTT_Analyser User Interface and HTML Results Viewer	27
5 Software Testing	29
6 RTT_Analyser Beat Detection Testing	29
6.1 Drum Beat Sample Set	29
6.2 Real Time Tempo Tests	30
7 Results	35
7.1 Overall Average Difference	35
7.2 Straight Sample Results	36
7.3 Swing Sample Results	37
7.4 Off-Beat Sample Results	38

7.5	Low Tempo Comparison	38
7.6	Beat Detection Response Time	39
7.7	Overall Tempo Accuracy	39
7.8	Filter/Non-Filter Comparison	39
8	Evaluation and Discussion	52
8.1	Project Successes	52
8.2	Project Challenges	52
8.3	Future Work	53
	References	55
	A Drum Sample Beat Patterns	59
	B Project Programming Code	63

Abbreviations

BPM	Beats Per Minute
DFT	Discrete Fourier Transform
DWT	Discrete Wavelet Transform
JSON	JavaScript Object Notification
PW	Performance Worm
SBT	Simple Build Tool
STFT	Short Time Fourier Transform
TDD	Test Driven Development

Definitions

Acoustic Drum Kit	A collection of drums and cymbals which do not have electronic amplification. Typically made up of a bass drum, snare drum, tom-toms, hi-hat and 1 or more cymbals.
Beat	For the purpose of this project a beat is defined as the sequence of equally spaced pulses used to calculate the tempo being played by the drummer.
Drum Module	The device which serves as a central processing unit for an electronic drum kit, responsible for producing the sounds of the drum kit.
Electronic Drum Kit	An electrical device which is played like an acoustic drum kit, producing sounds from a stored library of instruments and samples.
MIDI	Musical Instrument Digital Interface is a protocol developed in the 1980's to allow electronic instruments and other digital musical tools to communicate with each other [1].
Tempo	The speed at which a piece of music is played [2] and counted in beats per minute (bpm).

1 Introduction and Background

This project report details the aim to develop a real-time drum beat tempo analysis system. The system will use different beat detection algorithms and be able to record the performance of each method when an extensive set of drum samples, representing a real drummer's performance, is processed through the system.

1.1 Drumming Training Tools Background

Timing is the fundamental skill any good drummer should possess and is the staple by which they are judged. For many years the only training tool available to a drummer to improve their timing was the metronome, which is an instrument used to mark musical tempo. The metronome was erroneously attributed to Johann Nepomuk Maelzel in 1815 but was invented by a Dutchman, Dietrich Nikolaus Winkel a year earlier. The traditional metronome, based on Winkel's original design is a hand-wound clockwork instrument that uses a pendulum swung on a pivot to generate the ticking, which depicts the desired tempo [3] and is still used today by musicians, as seen in Figure 1.



Figure 1: Traditional Metronome [5]


Today drummers commonly use electronic versions of the metronome, which are now developed with functions specifically tailored to a drummer's training requirements. The Tama Rhythm Watch (Figure 2) was the first metronome designed specifically for drummers, providing enough volume to be used with real drums as well as allowing for the use of different time signatures¹ and preset rhythm patterns to help improve performance.

Following the development of the MIDI driven electronic drum kit came the development of more advanced training tools, able to provide live feedback to a drummer during any given performance. Today the leaders in this field are Roland. Their V-Drums line provide a variety of tuition packages including the SCOPE and more recently the COACH system provided in their drum modules. The SCOPE system provides live feedback to a drummer by plotting their performance on a grid representing the elements of the drum kit, Figure 3a. The COACH system offers an improved user experience by providing an accuracy figure relating to the number of hits that the drummer has played in time, Figure 3b.

¹A detailed explanation of time signatures can be found in section 1.2.3



Figure 2: Tama Rhythm Watch [6]

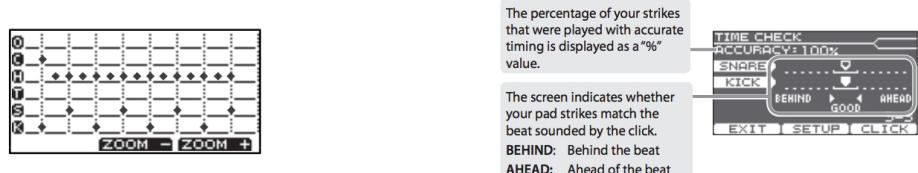

(a) Screen shot of the SCOPE system [7]

(b) Screen shot of the COACH system [7]

Figure 3: SCOPE and COACH training tools

The Roland catalogue also includes the DT-1 tutor software package, which provides drummers with an interactive experience helping to improve their rhythm, coordination and sight reading [7] (Figure 4).



Figure 4: Screen shot of the DT-1 V-Drums Tutor [7]

Roland have even started to design games within this field. Their latest release, the V-Drums Friend Jam app, provides the player with live feedback and evaluates each performance to provide the player with a score, which can be shared over social media (see Figure 5).

Despite these developments, there have been a limited number of tools available to be used

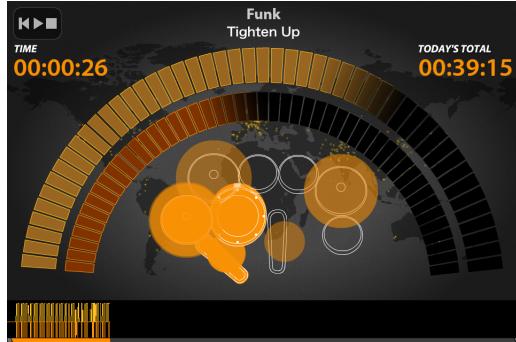


Figure 5: Example of the Roland Friend Jam software package [7]

with acoustic drums. A look at the the App Store² and Google Play³, reveals a small number of general live bpm detectors but no applications focused towards a drummers training needs.

1.2 Drum Musical Theory

In order to understand the fundamentals of musical timing some theory needs to be examined. Firstly, the concept of a drummer playing time must be considered. Time, in a drumming sense is an informal term used to describe the consistent rhythmic pattern that a drummer will play on the hi-hat or ride cymbal [4] and it can be considered one of the most important components of any drum beat. It is also important to note that when a drummer is playing a drum beat, they may play one or more parts of a drum kit simultaneously.

1.2.1 Notation

Drum music notation is written on staff, which is made up of five individual lines (Figure 6). The clef found on the far left of the staff indicates the pitch of the notes [2] and as percussion instruments are non-pitched they use the percussion-clef. On traditional musical notation, the lines and spaces between them represent a tone to be played. However, as drums are not considered tonal, the notes written on the staff indicate a certain drum or cymbal. The staff is separated into individual measures which are known as bars [8] and it is these bars that are the basis of musical time. A bar of drum music typically consists of different notes representing which instruments to be played and when. The number of notes within a bar may also vary depending on their length.

1.2.2 Notes

The notes used in drum notation not only represent the percussive instrument to be played but also the duration it should be played for. Notes come in different lengths and the key

²Apple's application store - itunes.apple.com/uk/appstore

³Google's application store for Android devices - play.google.com/store



Figure 6: Example of a staff used in musical notation

values are the whole ($1/1$), half ($1/2$), quarter ($1/4$), eighth ($1/8$) and sixteenth ($1/16$). For example, two eighth notes represent the same time value as a single quarter note. It is also possible to divide note values by three instead of two, these notes are known as triplets. An eighth note triplet is played fifty percent faster than a normal eighth note, therefore for every two eighth notes there are three eighth note triplets [8]. An example of the eighth-note triplets being used is in a twelve eight ($12/8$) jazz shuffle, the time element played on the ride cymbal or hi-hat is characterised by playing the first and third triplet of an eighth-note triplet grouping [4]. Although, such a time element on a cymbal is not considered to be a beat, the notes produced by the action of playing a cymbal need to be on the beat. Therefore, for the purpose of this project, it is the count of the prominent beats within a drum beat that are used to calculate a drum beat's tempo.

1.2.3 Time Signatures

Time signatures appear on the staff just after the clef and are written as a fraction where the top number indicates the number of beats that there are in a bar, as seen in Figure 6. The bottom number represents the size of the note that makes up the duration of one beat. For example the straight time four four ($4/4$) or common time signature indicates four beats in each bar or measure where each beat is made up of one quarter note [8]. Within these bar lines beats can be further divided by using a technique known as subdivision, which is a method for reducing the pulse or rhythm pattern into smaller parts than those originally written. For example, counting a four four ($4/4$) measure in eighth ($1/8$) or sixteenth ($1/16$) notes.

1.2.4 Playing Basics

With the basics of drum theory covered it is now possible to discuss the key elements of a drum beat. Typically for a straight four four ($4/4$) beat, the bass drum is played on the first and third beat and the snare drum is played on the second and fourth beat both as quarter notes. This is more commonly known as a back beat [4]. This just leaves the time element which is usually played on the ride cymbal or hi-hat. This too could be played using quarter notes on the first, second, third and forth beats. However, in order to make the drum pattern more dynamic the time element is played using subdivisions, typically using eighth note subdivisions. The ride cymbal or hi-hat will therefore be played on the

first, second, third and forth beats as well as the eighth notes in-between each quarter note. This can be demonstrated by counting the one-and-two-and-three-and-four-and, where the “and” represents the subdivided eighth note. Playing time on the “and” note is also known as playing on the off beat.

Additionally to this technique a drummer will usually ensure that there is a difference in the volume of the eighth notes being played on the quarter notes and those being played on the “and”. This technique of emphasising certain beats is known as accenting.

1.3 Beat Detection Background

Most of the early work on beat detection was a by-product of research directed at other areas of musical understanding. Some of the first work in this field can be attributed to H. C. Longuet-Higgins. In 1976, whilst studying the psychological theory of how Western musicians perceive rhythmic and tonal relationships between musical notes, he produced an algorithm capable of following the beat of a performance and adjust the perceived tempo accordingly[9]. Longuet-Higgins’ work was built on the premise that in order to perceive the rhythmic structure of a melody it is first necessary to identify the time at which each beat occurs [10], otherwise known as onset detection. The onset of a note is the instant which marks the start of the variation in the frequency of a signal, a visualisation of this can be seen in Figure 7. Once detected it can then be used to measure the onset times of sonic events⁴ within a piece of music [14]. These onset times are then used within a beat detection algorithm in order to calculate a piece of music’s tempo.

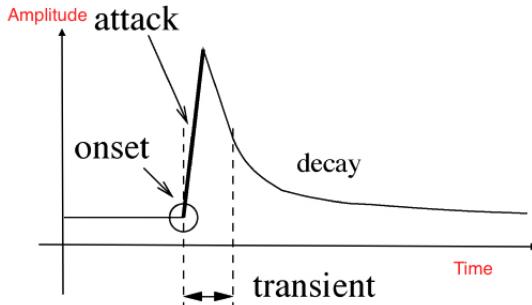


Figure 7: The onset of a note is the instant which marks start of the variation in the frequency of a signal [16]

Since Longuet-Higgins’ first work the area of beat detection has expanded rapidly. In 2005, the first annual Music Information Retrieval Evaluation eXchange (MIREX) was held. MIREX includes a contest with the goal of comparing state-of-the-art algorithms for music information retrieval [17] and the topics to be evaluated are proposed by the participants. In the first year, three of the nine topics concerned beat detection, including audio onset detection and since its first inclusion it has been an evaluated topic of all but

⁴A sonic event is a singular feature of a piece of music which can be made up of one source or many [15], e.g. the hitting of a drum

one of the last twelve contests [14]. The beat detection algorithms proposed to perform the tempo analysis for this project, the Beatroot system developed by Simon Dixon [11] and a development on the original audio analysis using the Discrete Wavelet Transform (DWT) by Tzanetakis, Essel and Cook [18]. Are both former entrants to the MIREX contest, with the Beatroot system receiving the highest score in the 2006 Audio Beat Tracking task [19]

1.4 Project Aims

The primary aim of this project is to investigation whether some of the currently available beat detection algorithms are accurate enough to be used in a training tool for drummers practicing on an acoustic drum kit. In order to achieve this the developed software package, hereafter referred to as RTT_Analyser⁵, will need to process enough live audio in form of sampled drum beats and record each of the chosen beat detection algorithms accuracy.

The original core features of the RTT_Analyser developed for this project are:

1. A live audio tempo analysis tool, that compares and records the performance of selected beat detection algorithms
2. The RTT_Analyser implements an adapted version of the beat tracking system Beatroot and the DWT algorithm described by Tzanetakis *et al* [18].
3. RTT_Analyser implements a system capable of parallel processing, allowing for the same captured live audio data to be sent to the chosen beat detection algorithms in order for the tempo to be calculated simultaneously.
4. While processing live audio the RTT_Analyser stores a predetermined data set in order to allow for performance analysis of the beat detection algorithms.
5. The RTT_Analyser will provide the user with real time feedback of the most recent tempo calculation returned
6. An extensive sample set of drum beats was created. The samples were produced with exact tempos in order to provide a ground truth regarding the accuracy of the beat detection algorithms.

2 RTT_Analyser Beat Detection Algorithms

The original proposed solution incorporated two beat detection algorithms; the Beatroot system [11] and the DWT method [18]. The initial the adaptation of the Beatroot system to be used with live audio took longer than the proposed time-frame. An alternative system needed to be found in order to mitigate this issue. Conveniently the Beatroot software package also contained another beat detection system; the Performance Worm (PW)[13]. To ensure the project remained on track, it was decided to replace the Beatroot system with

⁵Where RTT stands for Real Time Tempo

the PW. Once the project was back on schedule, adaptation of the Beatroot system to work with live audio was resumed. This was successfully completed prior to the development of the user interface. It was subsequently decided to incorporate all three beat detection algorithms into the final piece of

The project report will now discuss the three beat detection algorithms incorporated in the RTT Analyser.

2.1 Beatroot

Beatroot is a beat detection software package created by Simon Dixon [11], designed to extract musical expression information from musical recordings [13]. The algorithm designed by Simon Dixon is ideal for the RTT Analyser as it is considered sufficiently fast enough to be implemented as part of a real-time system [20].

Beatroot is comprised of two major components, the tempo induction and the beat tracking subsystems. Before tempo induction can take place, first a list of onsets needs to be retrieved[20]. This is achieved by obtaining a time-frequency representation with a Short Time Fourier Transform (STFT). The STFT is based on the Discrete Fourier Transform (DFT), which can be used to determine how much of a frequency exists within a signal. However, the DFT is unable to provide any details of when a frequency component occurs in time for non-stationary signals⁶. A solution to this is to split a non-stationary signal into a number of smaller segments using a window function, which effectively creates a series of stationary⁷ signals which the DFT can then be applied to. By splitting the signal into smaller segments the STFT is able to apply the DFT to these segments and essentially express a signal as a linear combination of elementary signals that are easily manipulated. The DFT returns a spectrum containing information about how the energy held within the signal is distributed in the time and frequency domains [23].

The window function used by Beatroot within the STFT is known as a Hamming window, which can help to reduce the amount of additional frequencies appearing in the returned DFT spectrum, known as spectral leakage.

The STFT used by Beatroot is defined as follows:

$$X(n, k) = \sum_{m=-\frac{N}{2}}^{\frac{N}{2}-1} x(hn + m) w(m) e^{-\frac{2\pi j m k}{N}} \quad (1)$$

Where a Hamming window $w(m)$ is calculated at a frame rate of 100 Hz, N is the size of the window, and n represents the frame number being processed. The index of frequency-domain component is represented by k , and h is the hop-size or number of samples between the start times of adjacent frames.

⁶Non-stationary signals are signals whose frequency contents changes over time [21]

⁷The frequency contents of a stationary signal does not change over time

The spectral flux function is then used as a method for measuring the change in magnitude of each returned frequency-domain sample [12] and is provided by:

$$SF(n) = \sum_{k=-\frac{N}{2}}^{\frac{N}{2}-1} H(|X(n, k)| - |X(n - 1, k)|) \quad (2)$$

Where SF is the spectral flux and H is the half-wave rectifier function given by the $H = \frac{x+|x|}{2}$, which is used to remove any negative values representing a falling signal. An example of the peaks returned by a spectral flux function can be seen in Figure 8.

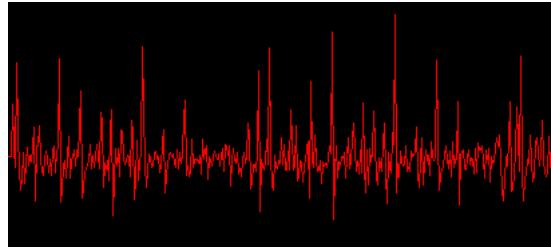


Figure 8: (Image Source: [60])

The onsets detected are then selected by a peak-picking algorithm which finds local maxima within the detection function. The tempo induction algorithm is then used to compute clusters of inter-onset intervals (IOI) by using the calculated onset times. Each cluster represents a hypothetical tempo, in seconds per beat [11]. The clustering algorithm works by assigning an IOI to a cluster if its difference from the cluster is less than 25ms. The cluster information is then combined by recognising the approximate integer relationships between clusters. An example of this can be seen in Figure 9 where cluster C2 is twice as long as C1, and C4 is twice that of C2. This information along with the number of IOIs within a cluster is then used to weight each cluster which is then returned as a ranked list of tempo hypotheses [20].

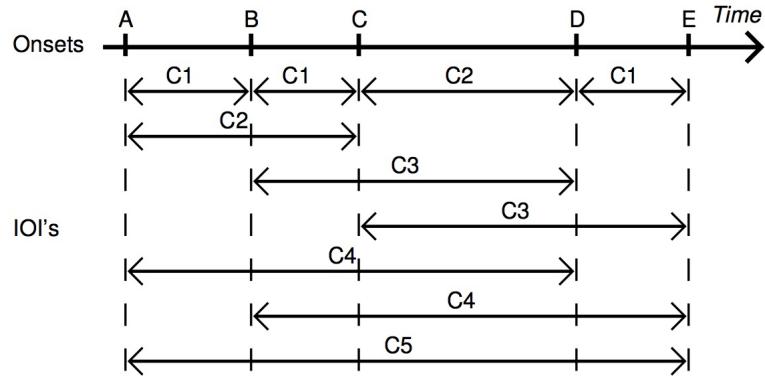


Figure 9: (Image Source: [20])

The multiple agent architecture of Beatroot’s beat tracking subsystem is then employed to find the sequences of events that closest match the original tempo hypotheses, these sequences are rated and the most likely set of beat times is determined. Each of the agents are initialised with a tempo or beat rate hypothesis and an onset time. Further beats are then predicted by the agent based on these parameters. Any onsets corresponding with the predicted beat times are taken as a beat time, those falling outside are not considered to be a beat time. The agents then rate themselves based on how evenly spaced the beat times are, the number of predicted beats which relate to actual events, and the salience⁸ of the matched onsets. The agent with the highest score is then returned as the sequence of beats corresponding to the processed audio [20], which is then used to determine the overall tempo of the audio by using the “inter-beat intervals, measured in beats per second” [11] to calculate beats per minute (bpm) of the audio.

2.2 Discrete Wavelet Transform Beat Detection Method

The discrete wavelet transform is a technique for analysing signals which was developed as an alternative to the STFT [18]. Like the STFT, the DWT is able to provide time and frequency information, however, unlike the STFT the DWT is able to do this without the need for a window function. Instead, the DWT uses a variable time-frequency resolution that allows for low frequencies to be detected precisely but not accurately placed in the time, and high frequencies to be accurately placed in time but not detected as precisely. The most common type of DWT can be viewed as a filter-bank, where each of the filters corresponds to a certain frequency range, usually representing an octave in frequency⁹[23].

In 2001, Tzanetakis *et al* described how the DWT could be used to extract information from non-speech audio [18]. Their beat detection algorithm was based on detecting the most prominent signals which are repeated over a period of time within the analysed audio.

The first stage is to split the signal into a number of octave frequency bands using the DWT. This allows for the time domain amplitude envelopes of each frequency band to be extracted separately, using the following three steps. Where $x[n]$ is the input signal and $y[n]$ the output:

1. Full Wave Rectification:

$$y[n] = |x[n]| \quad (3)$$

a process of converting the amplitude of each frequency band to one polarity [26], which can be either positive or negative. Performed in order to extract only the time-related envelope of the signal as opposed to the time domain signal itself [24].

2. Low Pass Filtering:

$$y[n] = (1 - \alpha)x[n] + \alpha y[n - 1] \quad (4)$$

⁸The salience is a measure of the note duration, density, pitch and density [11], which is calculated from the spectral flux of the onset [20]

⁹Acoustically, an octave above a note is the note which has twice the frequency of the original [2].

for a single frequency point where α has a value of 0.99. Designed to allow frequencies below a cutoff frequency through but blocks any frequencies above the cutoff frequency [25]. Used in this context as a way to smooth the signal within envelope [24].

3. Down-sampling:

$$y[n] = x[kn] \quad (5)$$

where k was set to a value of 16. Due to the large periodicities in beat analysis, the signal is down-sampled in order to reduce the computation time of the autocorrelation stage without causing any negative effects on the performance of the algorithm [24].

Each frequency band is then normalised through a method of mean removal:

$$y[n] = x[n] - E[x[n]] \quad (6)$$

where E represents the expected mean value. Mean removal is applied to ensure the signal is centred at zero for the autocorrelation stage [24]. The autocorrelation function is then applied to each frequency band:

$$y[n] = \frac{1}{N} \sum_n x[n]x[-k] \quad (7)$$

where N represents the sample size. The resulting peaks produced by the autocorrelation function correspond to the various periodicities of that signal's envelope. The first five peaks of the function and their corresponding periodicities are then calculated in beats per minute and added to a histogram. This process is repeated while iterating over the signal. The estimated tempo of the audio signal is then retrieved from the periodicity that corresponds to the highest peak within the histogram [18]. The DWT beat histogram flow diagram can be seen in Figure 10.

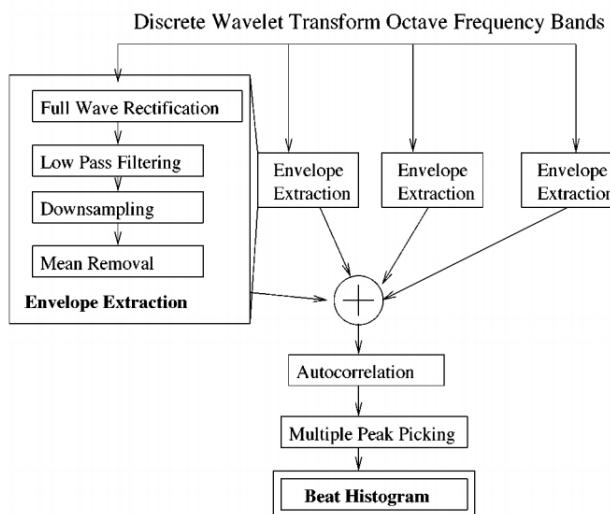


Figure 10: Flow diagram of the beat histogram method described by Tzanetakis et al [24]

2.3 Performance Worm

The final beat detection algorithm employed in the RTT_Analyser is the PW system, designed by Simon Dixon, Werner Goebel and Gerhard Widmer [27]. The PW is based on a real time algorithm which is able to determine the tempo of raw audio, while keeping track of other possible tempo hypotheses that are rated and updated dynamically. This allows for the changes in the tempo to be reported to the user as they occur [27].

First the PW processes the raw audio which can either be extracted from a static recording or directly from a live input with a smoothing filter¹⁰ in order to obtain the RMS amplitude¹¹ of the signal taken from a 40ms window. The note onsets are then calculated by the event detection module that finds the slope of the smoothed amplitude and then calculates the set of local peaks which are taken as the note onset times [27].

The signal is then processed by the multiple tempo tracking subsystem which uses a similar approach to the Beatroot system. A clustering algorithm (Figure 11), first calculates the time intervals (inter-onset intervals or IOIs) between the pairs of onsets, which it holds in memory (approximately five seconds of audio). The intervals are then weighted by the mean of the amplitudes and each interval's IOIs are clustered using the best-first algorithm (shown in Figure 11). The significant clusters of IOIs determined by the best-first algorithm are subsequently assumed to be the musical units, i.e. note or beat, held within the signal.

As in the Beatroot system, these clusters are then used as the bases of the tempo hypotheses produced by the tempo tracking subsystem. The tempo inducer then exploits a property of most Western music where time intervals are related by small approximate integer ratios. As the times held by the clusters can be considered to represent related notes, e.g. quarter and eighth notes. The tempo inducer then adjusts cluster times and weightings according to the information held by the sets of related clusters. Two clusters are considered to be related if the ratio of their time intervals is close to an integer. The highest weighted clusters and their respective tempo hypothesis are then returned as the tempo output [27].

3 Solution Design and Architecture

The basic premise for the RTT_Analyser is to enable the user to play a live drum beat through the system, the tempo of the live audio is then returned to user while being stored for future analysis. Initially, the RTT_Analyser opens the inbuilt microphone of the device upon which the software is being run. After establishing the live audio stream the RTT_Analyser beat detection algorithms are sent the live audio data in the format of a byte array. These live audio bytes are then decoded according to the individual algorithm's

¹⁰Process which attempts to reduce any noise found within a signal. A smoothing filter does this by reducing any points in the signal that are higher than adjacent points and reducing those points that are lower than adjacent point [49]

¹¹RMS stands for root mean square and is the process of squaring all of the amplitude values, then taking the average (mean) of the squared values, and then calculating the square root of the average value [50].

Inter-onset interval calculation

For each new onset

For IOI times t from 100ms to 2500ms in 10ms steps

Find pairs of onsets which are t apart

Sum the mean amplitude of these onset pairs

Best-first algorithm

Loop until all IOI time points are used

For times t from 100ms to 2500ms in 10ms steps

Calculate window size s as function of t

Find average amplitude of IOIs in window $[t, t + s]$

Store t which gives maximum average amplitude

Create a cluster containing the stored maximum window

Mark the IOIs in the cluster as used

Cluster Combining

For each cluster

Find related clusters (multiples or divisors)

Combine related clusters using weighted average

Match combined clusters to tempo hypotheses and update

Figure 11: Clustering algorithm used in the Performance Worm Multiple Tempo Tracking Subsystem [27]

requirements before being processed and the tempo calculated.

3.1 Live Audio Processing

The live audio is processed using the Java Sound API, which contains two key types; mixers and lines. Mixers are a representation of the audio devices available on a certain system and a line is an element of the digital audio pipeline responsible for moving audio in and out of the system. Typically, audio capture is started or stopped using a `TargetDataLine` that provides a path to the systems audio input device. Access to this device is provided by the `AudioSystem` class, which acts a clearing house for audio components. In order to ensure the bytes of audio data passed through the `TargetDataLine` are interpreted correctly the `AudioFormat` object enables the audio format to be defined by the list attributes below [34], which includes the values chosen to ensure that the audio capture by the RTT_Analyser is comparable to CD quality:

- Encoding - Set to “PCM.signed”, representing audio encoded to the native linear pulse code modulation, where pulse code modulation is the process of sampling and quantising the signal into discrete symbols for transmissions [28].
- Sample Rate - 44,100, set to match CD quality for the number of analog samples

analysed per second.

- Sample Size in Bits - 24, based on a sound card with a 24 bit sample depth.
- Channels - 2, audio is captured using the built in microphone, typically stereo of the device the RTT_Analyser is being run on.
- Frame Size - 6, where the frame size is the number of bytes in a sample multiplied by the number of channels [61].
- Frame Rate - 44,100, same as the sample rate.
- Big Endian (boolean) - false, as the machine used to develop the RTT_Analyser has Intel cores, which use a little-endian architecture¹².

In order to process the captured bytes the RTT_Analyser required a concurrent system capable of running the three beat detection algorithms in parallel. This was provided by the Akka Actors system.

3.2 Akka Actors

The Akka Actor Model is specifically designed to provide the ability to write concurrent systems with a high level of abstraction, that removes the need for the developer to handle locking and individual thread management. This system makes it much easier to write concurrent and parallel systems than with the traditional approaches used in Java [30].

A fundamental construct of the Akka Actor system is that it strictly adheres to the Reactive Manifesto, which aims to ensure applications are easier to develop and amenable to change. This allows for a higher level of tolerance to failure and the ability to meet any such failure elegantly [31]. The Reactive Manifesto requires applications to satisfy one or more of the requirements listed below [31] and visualisation of how they interact can be seen in Figure 12.

Responsive - The system responds in a timely manner where possible. It provides usability and utility responsiveness as it is possible to detect and resolve problems effectively.

Resilient - The system should be able to remain responsive even in the event of a failure, which applies to all parts of the system not just the mission critical components. To achieve this each component needs to be isolated within the system, therefore allowing failed parts of the system to recover without effecting the responsiveness of the system as a whole.

Elastic - The system will be able to maintain the same level of responsiveness despite varying workloads. Reacting to changes in the rate of input by adapting the levels of resources allocated accordingly.

¹²Endianess refers to the order of bytes which make up a digital word. Big endianess stores the most significant byte at a certain memory address and the remaining bytes being stored in the following higher memory addresses. The little-endian formate reverses the order storing the least significant at the lowest and most significant at the highest memory address [54].

Message Driven - Reactive systems rely on the use of asynchronous message passing in order to establish boundaries between components within the system, ensuring isolation, loose coupling¹³ and location transparency¹⁴. By utilising non-blocking¹⁵ message-passing it is possible to ensure message recipients only consume resources when active, leading to a much reduced system overhead.

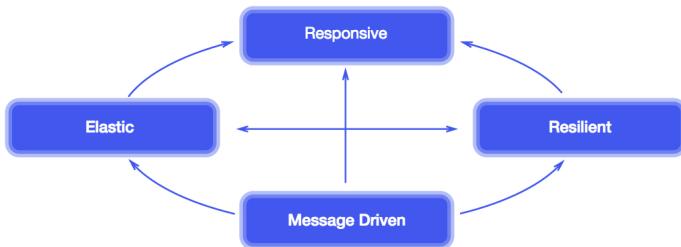


Figure 12: Visualisation of the requirements of the Reactive Manifesto interact [31]

3.2.1 The Actors

The actors within the actor model are objects that are used to encapsulate state and behaviour. They communicate exclusively through messages passed to a recipients mailbox and it can help to think of them as group of people being assigned subtasks within an organisational structure. One of the key features of an actor system is that tasks are split up and delegated until they become small enough to be handled in one piece. This process ensures that the tasks being carried out by the actors are clearly defined. It also allows for the actors to be designed in terms of the messages they are able to receive and how they should react to these messages and any failures that might occur. The actors within a system will naturally form a set hierarchy. For example, an actor assigned the task of overseeing a certain function might split this function into a number of smaller tasks. It will then assign these tasks to some child actors, which it supervises until the task is completed [32].

The actors created within the RTT_Analyser were a mix of stand alone actors and actors which were required to supervise subtasks carried out by child actors.

¹³Loose coupling is a design approach of distributed systems which emphasises agility and ability to adapt to changes [51]

¹⁴The decoupling of the runtime instances from their references [31]

¹⁵In concurrent programming algorithms which do not have their execution indefinitely postponed when competing for a resource is said to be non-blocking [31].

3.3 Design Pattern

The RTT_Analyser was developed using the Model View Controller (MVC) design pattern, as the MVC pattern is the tried-and-tested approach when designing applications with a graphical user interface [53]. The MVC pattern is made up of the following components and a visualisation of the MVC can be seen in Figure 13.

- **Model** - is represented by the data and associated applications [53], within the RTT_Analyser the model is provided by the beat detection algorithms, the live audio capturing and processing components.
- **View** - is the graphical interface displayed to the user which updates itself automatically [53]. For the RTT_Analyser the view is represented by the user interface
- **Controller** - is the part of the application that responds to the user interactions, liaising with both the model and the view components[53]. The controller for the RTT_Analyser is the actor system, which is responsible for message passing between the model and view components.

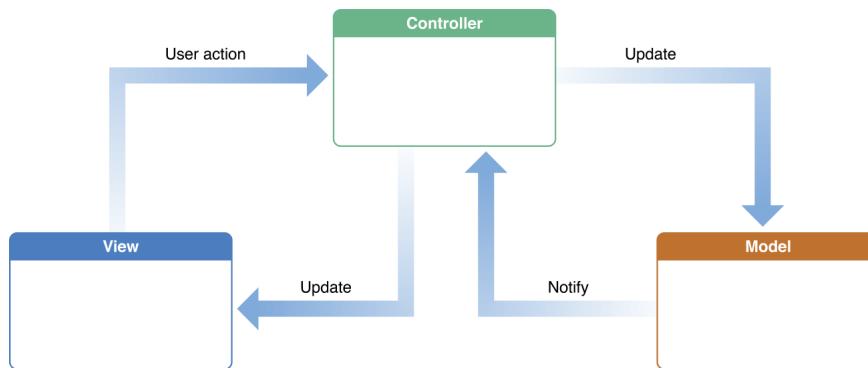


Figure 13: The three components which make up Model View Controller design pattern [52]

A high level class diagram of the final version of RTT_Analyser can be seen in Figure 14

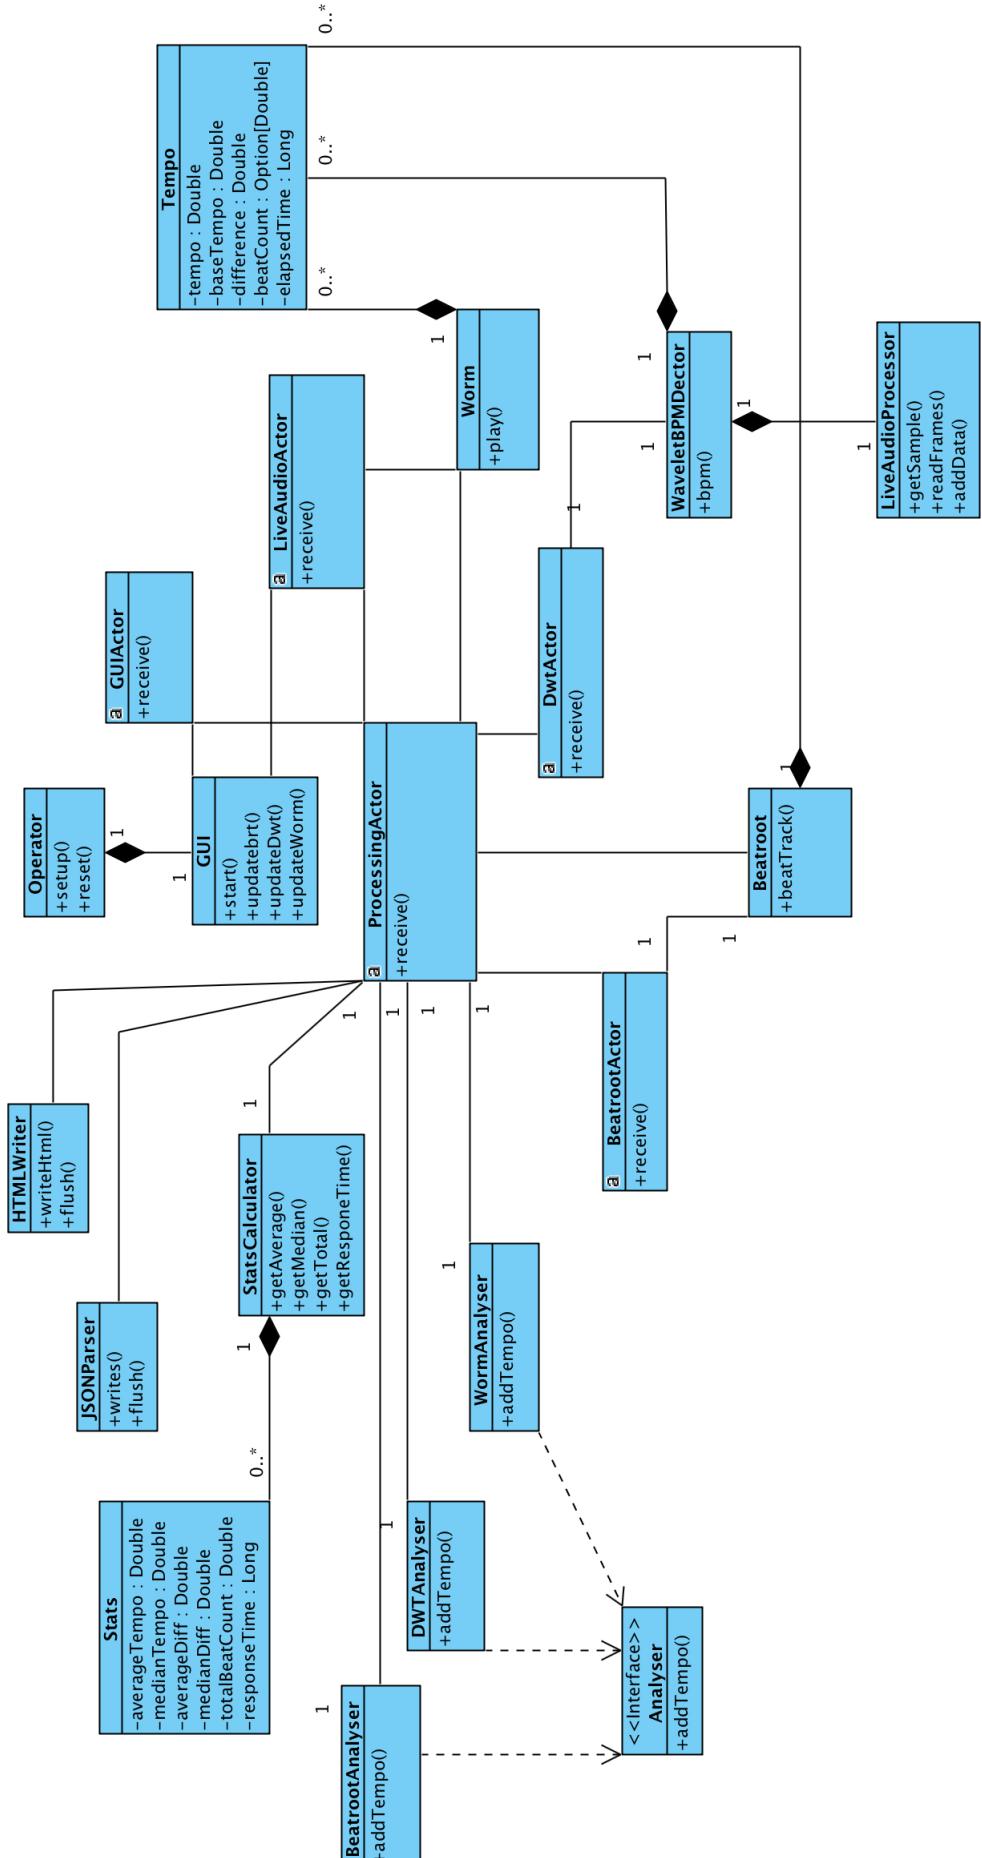


Figure 14: UML diagram of the RTT-Analyser, only relevant methods are shown to reduce size and the Beatroot and PW systems are shown as one class.

4 Implementation

The RTT_Analyser is written in Java and Scala, due to the Beatroot and PW both being written in Java, and the author's familiarity with both languages. Using Scala also ensured the twin constructs of pattern matching and case classes were able to be utilised where appropriate. Pattern matching is used to implement type switches and is considered to create "code that is both succinct and obviously correct" [38]. Case classes are Scala's way of allowing pattern matching to be performed on objects without the need for additional boilerplate code. Using Scala also allows for more elegant and concise tail recursive¹⁶ solutions to be developed over loop-based solutions. As the Scala compiler provides an optimiser which ensures that there are not any runtime overheads to be paid for employing tail recursion [39].

The RTT_Analyser was developed in the Scala specific build tool, sbt (simple build tool). The sbt is a build tool that creates a stable build platform that supports a reactive development environment able to re-run all tests when source code is updated [33]. In terms of this project sbt was chosen primarily for it's support of mixed Scala/Java projects. Allowing for the Java Beatroot and PW systems to be easily incorporated with the Scala implementation of the DWT beat detection algorithm and the Akka Actor system.

4.1 The Actor System

Although the actors were not the first element of the RTT_Analyser to be implemented, introducing them first helps to provide some context for the how the other components communicate.

The actor system is constructed of five different actors and a diagram of the actor hierachy can be seen in Figure 15.

The messages permitted to be passed between the RTT_Analyser's actors were all implemented as case classes within a sealed trait (Figure 16). A sealed trait ensures that the only classes extending the trait are in the same file [39], which works well with the actor's pattern matching recieve method.

The **LiveAudioActor** (Figure 17) assumes the role of the overseer of the system, being responsible for starting and stopping the live audio capture, as well as the termination of the RTT_Analyser when appropriate.

The **ProcessingActor**(Figure 18), a child of the **LiveAudioActor** can be considered the coordinator of the storing and processing captured audio data, and the writing of the calculated tempos. In order to ensure the processing remains as isolated as possible the **ProcessingActor** employs two worker actors, **BeatrootActor** and **DWTActor**, carrying out

¹⁶A recursive solution is considered to be tail recursive if the last operation carried out is to calculate the return value, it has the advantage over recursive calls of not building a stack trace and instead performing each operation in a single stack frame [39]

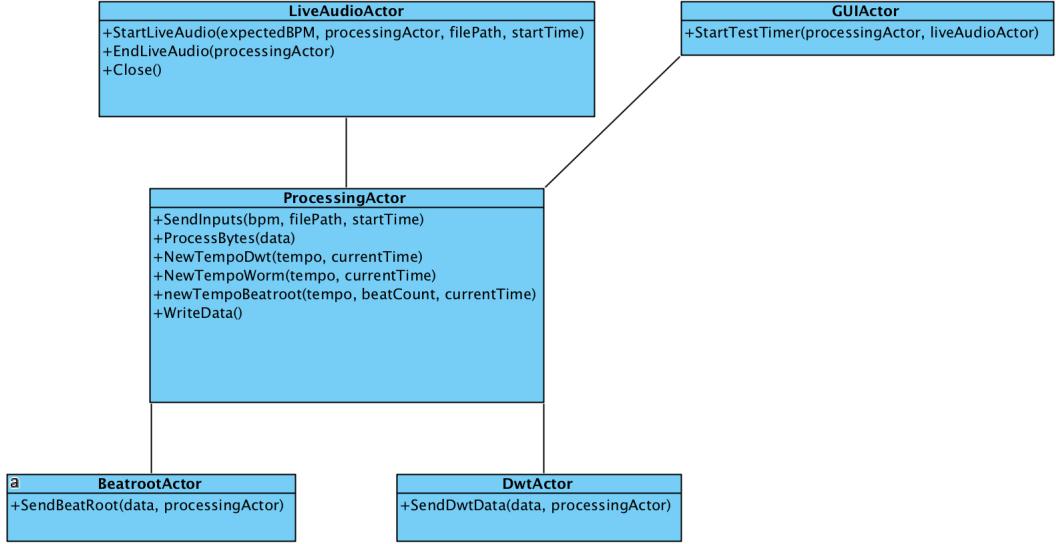


Figure 15: UML drawing of the RTT_Analyser’s actor hierarchy, operations within each actor represent the messages they can receive

```

sealed trait Messages
case class StartLiveAudio(expectedBPM: Double, processingActor: ActorRef, filePath: String, startTime: Long) extends Messages
case class EndLiveAudio(processingActor: ActorRef) extends Messages
case class ProcessBytes(data: Array[Byte]) extends Messages
case class NewTempoWorm(tempo: Double, currentTime: Long) extends Messages
case class NewTempoDwt(tempo: Double, currentTime: Long) extends Messages
case class NewTempoBeatroot(tempo: Double, beatCount: Double, currentTime: Long) extends Messages
case class WriteData() extends Messages
case class SendInputs(bpm: Double, filePath: String, startTime: Long) extends Messages
case class SendBeatRoot(data: Array[Byte], processingActor: ActorRef) extends Messages
case class SendDwt(data: Array[Byte], processingActor: ActorRef) extends Messages
case class Close() extends Messages
case class StartTestTimer(processingActor: ActorRef, liveAudioActor: ActorRef) extends Messages
case class Reset() extends Messages

```

Figure 16: The message case classes used by the RTT_Analyser’s actor system

the task of initiating the tempo calculation. The beat detection worker actors do not return any messages to the `ProcessingActor`, instead a reference to the `ProcessingActor`, in the form of an `ActorRef` handle is passed to the respective beat detection system. The calculated tempo values are then sent back directly to the `ProcessingActor` to be stored and subsequently saved to file when appropriate.

The final RTT_Analyser actor, the `GUIActor`, is a standalone actor on the same level as the `LiveAudioActor` within the actor hierarchy. the `GUIActor` is responsible for the timing of the beat detection test process.

All of the RTT_Analyser’s parent and child actors were all instantiated in the self contained `Operator` object (Figure 19. This ensured that potentially dangerous practice of declaring one actor and breaking actor encapsulation [30] was avoided.

```

class LiveAudioActor extends Actor with ActorLogging{
    val w: Worm = new Worm()

    def receive = {
        case StartLiveAudio(expectedBPM, processingActor, filePath, startTime) =>
            w.setActor(processingActor)
            w.play()
            processingActor ! SendInputs(expectedBPM, filePath, startTime)
        case EndLiveAudio(processingActor) =>
            w.stop()
            Thread.sleep(2000)//allow for any processing to finish
            processingActor ! WriteData
        case Close =>
            context.system.terminate()
            System.exit(0)
        case _ =>
            println("Error")
    }
}

```

Figure 17: LiveAudioActor class

4.2 Live Audio Capture

Originally, the RTT_Analyser’s live audio capture was handled by the `SoundCaptureImpl` class, where the raw audio was captured using the audio format described in section 3.1. The audio is then converted into a stream of bytes by the Java `AudioInputStream` [29], before being passed for processing by the beat detection algorithms. The sound capturing components of this class were based on those described in the Java Sound Programmer Guide [34] and consisted of the code in Figure 20.

The need for the code in Figure 20 became defunct with the design decision to include the PW system within the RTT_Analyser, as the PW is already set up to capture live audio. The captured audio now needed to be stored by the PW in a manner which allowed for all three beat detection algorithms to be able to process the same captured audio. This was achieved by adding the method `addBytes` (Figure 21) to the `AudioWorm` class, responsible for the capturing and processing of the live audio within the PW. The `addBytes` method took a byte array, which was stored within a `ByteArrayOutputStream`. Once the sufficient number of bytes had been amassed the `ProcessingActor` was sent the `ProcessBytes` message, which initiated the processing of the audio data by the Beatroot and DWT beat detection systems.

4.3 DWT Beat Detection Implementation

The DWT beat detection component of the RTT_Analyser was originally proposed to be fully implemented by the author. However, due to the time constraints the Scala implementation by Marco Ziccardi [36] was incorporated.

The implementation of Tzanetakis *et al* beat detection algorithm by Marco Ziccardi [36] was part of a larger system which offered a number of other beat detection methods. The RTT_Analyser only required the class which implemented the DWT beat detection algo-

```

def receive = {
    case SendInputs(bpm, filePath, startTime) =>
        expectedBpm(bpm)
        path(filePath)
        timeAtStart(startTime)
    case ProcessBytes(data) =>
        beatrootWorker ! SendBeatRoot(data, self)
        dwtWorker ! SendDwt(data, self)
    case NewTempoDwt(tempo, currentTime) =>
        val t = Tempo(tempo, expectedBpm, None, currentTime - timeAtStart)
        gui.updateDwt(t)
        dwtStatsBuffer += t
        dwtAnalyser.addTempo(t)
    case NewTempoWorm(tempo, currentTime) =>
        val t = Tempo(tempo, expectedBpm, None, currentTime - timeAtStart)
        if (count == 5) {
            gui.updateWorm(t)//worm element of gui updated 5 time a second
            count = 0
        }
        count = count + 1
        wormStatsBuffer += t
        wormAnalyser.addTempo(t)
    case NewTempoBeatroot(tempo, beatCount, currentTime) =>
        val t = Tempo(tempo, expectedBpm, Some(beatCount), currentTime - timeAtStart)
        gui.updatebrt(t, beatCount)
        beatStatsBpmBuffer += t
        beatrootAnalyser.addTempo(t)
    case WriteData =>
        addStats()
        jsonParser.writeAll(wormAnalyser, dwtAnalyser, beatrootAnalyser)
        jsonParser.flushFull(path + "full.json")
        htmlWriter.writeHtml(List(wormAnalyser, dwtAnalyser, beatrootAnalyser))
        htmlWriter.flush(path + "stats.html")
}

```

Figure 18: Recieve method of the ProcessingActor class

rithm, WaveletBPMDetector, which relied on a Scala version of the WavFile Java class created by Andrew Greensted [37]. However, as the RTT_Analyser was not required to decode WAV files, this class was adapted to form the LiveAudioProcessor class (Figure 22). The class was based on three methods from Andrew Greensted’s WavFile class [37], `readFrames`, an overloaded `readFrames` and the `getSample` method. Rather than being simply a Scala version of the Java code, where possible these methods were written using Scala’s pattern matching facility and any loops converted to a tail recursive solution.

The final addition to the `LiveAudioProcessor` class was the inclusion of the `addData` method, which assigns the byte array containing the raw audio to the buffer variable processed in the `getSample` method. In order for the `WaveletBPMDetector` class to return a tempo result for a single window of audio (matched to the size of the buffer byte array), the loop was removed from the `bpm` method. Once a tempo was calculated this was sent back to the `ProcessingActor` using the `NewTempoDWT` message.

4.4 Tempo, Analyser and Stats

The `Tempo` object, implemented as a method of encapsulating the RTT_Analyser’s calculated tempo results, is comprised of the calculated and expected tempos, and difference between

```

val system = ActorSystem("liveAudioSystem")
val liveAudioActor = system.actorOf(Props[LiveAudioActor], "liveAudioActor")
val beatrootActor = system.actorOf(Props[BeatrootActor], "beatrootActor")
val dwtActor = system.actorOf(Props[DwtActor], "dwtActor")
val processingActor = system.actorOf(Props(new ProcessingActor(beatrootActor, dwtActor)))
val guiActor = system.actorOf(Props[GUIActor], "guiActor")

```

Figure 19: Declaring of the RTT_Analyser's actors

```

def startCapture: Int = {
    try {
        input = AudioSystem.getTargetDataLine(inputFormat)
        val info: DataLine.Info = new DataLine.Info(classOf[TargetDataLine], inputFormat)
        input = AudioSystem.getLine(info).asInstanceOf[TargetDataLine]
        input.open(inputFormat)
        outputStream = new ByteArrayOutputStream
        input.start()
    }
}

```

Figure 20: Example of the basis of live audio capture method in Scala

these values. Additionally, an `Option`¹⁷ count of beats detected and the time at which the tempo result was calculated is included.

The `Analyser` object was designed to hold the calculated `Tempo` objects within a `ListBuffer`, chosen for its scalability. The `Analyser` trait was extended to create three case classes corresponding to the relevant beat detection algorithms. The `Analyser` implementations also contained an `Option Stats` value.

The `Stats` object is an object used to hold the average and median values of the calculated tempos, difference between the expected and calculated tempos. The time taken to calculate a tempo within plus or minus one bpm of the expected value was also recorded in order to assess the accuracy of the beat detection algorithms. The `StatsCalculator` was a helper class responsible for carrying out computation of the values held with the `Stats` object and was implemented using the code seen in Figure 23.

4.5 JSON Parsing

The implementation of the data storage system of the RTT_Analyser used the JavaScript Object Notation (JSON). JSON's lightweight data-interchange format [41] ensured the conversion from a Scala case class to a JSON object is straightforward. The JSON is generated by the ScalaJSON library provided by the play framework [40]. Specifically the `Writes` object, which converts an object into a JSON representation. Three methods were written in order to account for the three implementations of the `Analyser` trait, an example of the code can be seen in Figure 24.

¹⁷The `Option` type is Scala's alternative to Java's `null` value, the `Option` type is in fact a container which either holds a value or is empty. It provides a much safer alternative to the error prone `null` value [38].

```

public void addBytes(byte[] data){
    try{
        if(bytePosition == 525672){
            outputStream.write(data);
            byte[] out = outputStream.toByteArray();
            outputStream.close();
            outputStream = new ByteArrayOutputStream();
            bytePosition = 0;
            processingActor.tell(new ProcessBytes(out), processingActor);
        }
        outputStream.write(data);
    } catch (IOException e) {
        e.printStackTrace();
    }
}

```

Figure 21

As JSON is written in a text format [41], the parsing of generated JSON was performed by simpling converting the JSON objects generated by the respective `write` methods to a string. This was then written to a JSON file where the path was provided from the user interaction with the RTT_Analyser’s user interface.

4.6 Adaption of Beatroot

Once the development of the RTT_Analyser was considered to be sufficiently on schedule, the adaption of the Beatroot system to work with live audio was attempted again. As with the `WaveletBPMDetector`, Beatroot would have to be set up to use the same audio bytes as those captured by the PW. As the PW’s `AudioWorm` class was already set up to capture the enough bytes to work with the `WaveletBPMDetector`’s smallest working window size of 131072, the same figure was chosen to be processed by Beatroot.

With the correct design decisions now taken the live audio adaption of Beatroot consisted of only a few minor steps. First, the `processFile` method was amended to receive the byte array holding the audio data recorded by the PW. A `ByteArrayInputStream` was then instantiated to hold the data, allowing the `processFrame` and `getFrame` methods to work in the same manner as with a static audio file. After the captured audio was processed the `ByteArrayInputStream` was closed, a step necessary to ensure that no overlap existed between captured audio data sets sent to be processed.

4.7 RTT_Analyser User Interface and HTML Results Viewer

The RTT_Analyser’s user interface (Figure 25) was designed with simplicity in mind and was implemented using the ScalaFX[43]. Sitting on the top of the JavaFX API and using the same declaration syntax as normal objects within Scala, ScalaFX enables developers to use the same syntax to create and modify the user interface’s scene graph¹⁸ [43].

Before the user could begin live audio capture, the expected bpm, file name and path were required. Once input, there are two modes available to the user. The first is to control

¹⁸A hierarchy of tree nodes what represent the visual components of an application’s user interface[55]

```

def addData(data: Array[Byte]) = {
    buffer = data
}

def readFrames(sampleBuffer: Array[Int], numberOfframes: Int): Int = {
    readFrames(sampleBuffer, 0, numberOfframes)
}

def readFrames(sampleBuffer: Array[Int], offset: Int, numberOfframes: Int): Int = {
    var pointer = offset

    for(i <- 0 until numberOfframes){
        getSample(0)
        frameCounter = frameCounter + 1
    }

    def getSample(acc: Int): Int = {
        acc match{
            case x if x < numberOfChannels => {
                sampleBuffer(pointer) = readSample().toInt
                val newAcc = acc + 1
                pointer = pointer + 1
                getSample(newAcc)
            }
            case _ => acc
        }
    }
    numberOfframes
}

def readSample(): Long = {

    @tailrec
    def sampleReader(value: Long, acc: Int): Long = {
        acc match {
            case x if x < bytesPerSample => {
                var v: Int = buffer(bufferPointer)
                if (acc < bytesPerSample - 1 || bytesPerSample == 1) v = v & 0xFF
                bufferPointer = bufferPointer + 1
                sampleReader(value + (v << (acc * 8)), acc + 1)
            }
            case x if x == bytesPerSample => value
            case _ => value
        }
    }

    sampleReader(0L, 0)
}

```

Figure 22: LiveAudioProcessor

the live audio beat detection manually using the start and stop buttons accordingly. The second, is the test mode that runs the audio capture and beat detection for thirty seconds, before closing down audio inputs and storing the results. During execution in both modes the RTT_Analyser displays the calculated tempo values to the user as a bpm value rounded to two decimal places.

On completion within both modes the results are stored within a JSON file automatically and also written to an HTML file. The results can then be viewed in a web browser using the *Results* button. The HTML tables were produced in `HtmlWriter` object which used reflection where possible to obtain the relevant field names, before using a number of tail recursive methods to write the field values and HTML tags to a `StringBuilder` object, chosen for it's mutability. The HTML tables are subsequently saved to an HTML file which is opened and viewed via the default browser. An example of the displayed results can be

seen in Figure 26.

5 Software Testing

During the development of the RTT_Analyser, Test Driven Development (TDD) was employed where possible. TDD is a development process that uses test-first development and refactoring. Test-first development involves writing a test before just enough production code is written to pass that test [44]. Refactoring is the process of making small changes to code and is used to improve the design of the code, Thus, making it easier to understand and modify [45].

The tests were written using the ScalaTest framework, which is one of the most dominant Scala testing frameworks currently available. ScalaTest is designed with the intention of providing a test framework that makes testing more concise and uses the Scala language in a way to ensure testing is easy and fun [46].

TDD was used at any stage of the development process where a piece of code with an expected behaviour was being implemented. It was not used for all classes, as when dealing with live audio it was not possible to know the exact data that would be recorded due to the presence of background noise. Although, where the requirement was simply to return a value of a certain type, basic TDD tests were written. The classes that were ideally suited to TDD and were developed completely using it were the Tempo, Analyser implementations, StatsCalculator, JSONParser and HTMLWriter.

A good example of TDD being applied during the development of the RTT_Analyser was during the creation of the StatsCalculator. Designed to carry out average and median calculations on the stored Tempo objects held within the Analyser implementations enabled TDD to be employed successfully.

When it was not possible to use TDD, particularly during the initial set-up and testing of the beat detection algorithms with live audio. A simpler testing approach was taken, consisting of running the system with a selection of sample drum beats of varying tempos, with console logs used to test that the system was performing the desired tempo calculations.

6 RTT_Analyser Beat Detection Testing

6.1 Drum Beat Sample Set

Once the software testing of the RTT_Analyser was complete, the full testing process could begin. The sample drum beats were written using the Apple sequencer program, GarageBand [47]. The writing of the drum beats took a slight deviation from the project proposal, rather than create multiple full drum beats in a varying number of styles, the drum beats were instead tested in layers. For example, a simple four four (4/4) bass drum beat with

a back beat and the time element being played on the hi-hat cymbal would account for four samples. This decision stemmed from how a cymbal behaves when it is played at high amplitudes (loudness), the vibrations it creates become chaotic and its clearly identifiable signals disappear, effectively becoming noise [48]. Therefore, to compare the drum samples with cymbals a baseline was required. This change was also considered to help provide a much more diverse data set, hopefully helping the understanding of how the different elements of a drum kit, not just cymbals, can affect the accuracy of the beat detection algorithms being tested by the RTT_Analyser.

Additionally, three Garageband stock samples were added to the sample set. These samples were included in an attempt to provide insight as to whether the beat detection algorithms are able to work efficiently, even when drum beat being tested is fairly complex.

In total, twenty eight drum samples were produced and the full details of the elements which each drum beat was comprised of and style of the drum beat can be seen in Table 1. A full visualisation of the drum beats used can be found in Appendix A.

6.2 Real Time Tempo Tests

The real time tempo detection tests were carried out in an environment with minimal background noise. The drum beats were played on an external speaker set to the same volume for all tests. Each drum beat was tested for thirty seconds over the tempo range of 60-160 bpm, where the tempo was increased in five bpm increments. Resulting in twenty one tests being carried out for each drum beat, producing a sample set consisting of 588 results files.

During the real time tempo tests it became apparent that at lower tempos the RTT_Analyser was returning values which were roughly twice that of the expected tempo. A possible explanation for this was considered to be aliasing. This resulted in it not being possible to distinguish between the values from sampled audio as they contain periodic replications of the original spectrum[22]. As this behaviour was being displayed by all three of the beat detection algorithms, it was decided that all of the drum samples would be reprocessed through the RTT_Analyser. However, this time a low-pass filter was applied to the point at which the audio is captured. The low-pass filter was provided by the source_code.biz Java dsp collection and the cutoff frequency was set to 100 Hz.

```

def getMedian(listBuff: ListBuffer[Tempo], identifier: String): Double =
  identifier match {
    case "tempo" => val list = getTempos(listBuff.toList); median(list)
    case "diffs" => val list = getDiffs(listBuff.toList); median(list)
  }

def median(list: List[Double]): Double = {
  //adapted from the sample at Rosetta code
  val (lower, upper) = list.sortWith(_ < _).splitAt(list.size / 2)
  if (list.size % 2 == 0) (lower.last + upper.head) / 2.0 else upper.head
}

def getAverage(listBuff: ListBuffer[Tempo], identifier: String): Double =
  identifier match {
    case "tempo" => val list = getTempos(listBuff.toList); average(list)
    case "diffs" => val list = getDiffs(listBuff.toList); average(list)
  }

def average(list: List[Double]): Double = {
  @tailrec
  def averageTR(list: List[Double], size: Double, total: Double): Double = list match {
    case Nil => println(total); println(size); total/size
    case x :: xs => averageTR(xs, size + 1, total + x)
  }
  averageTR(list, 0, 0)
}

def getTotal(listBuff: ListBuffer[Tempo]): Double = {
  val list = getBeatCounts(listBuff.toList); totalbeatCount(list)
}

def totalbeatCount(list: List[Double]): Double = {
  @tailrec
  def totalHelper(lst: List[Double], total: Double): Double =
    lst match {
      case Nil => total
      case x :: xs => totalHelper(xs, x)
    }
  totalHelper(list, 0)
}

def getResponseTime(list: List[Tempo]): Long = list match {
  case (x :: xs) => {
    if (x.difference < 1.0 && x.difference > -1.0) {
      x.timeElapsed
    } else getResponseTime(xs)
  }
  case Nil => 0
}

def getTempos(lst: List[Tempo]): List[Double] =
  lst match {
    case x :: xs => x.tempo :: getTempos(xs)
    case Nil => Nil
  }

def getDiffs(lst: List[Tempo]): List[Double] =
  lst match {
    case x :: xs => x.difference :: getDiffs(xs)
    case Nil => Nil
  }

def getBeatCounts(lst: List[Tempo]): List[Double] =
  lst match {
    case x :: xs => unwrapOption(x.beatCount) :: getBeatCounts(xs)
    case Nil => Nil
  }

def unwrapOption(head: Option[Double]): Double =
  head match {
    case Some(value) => value
    case None => 0
  }

```

Figure 23: Stats calculation methods used by the StatsCalculator

```

implicit val tempoWrites = new Writes[Tempo] {
  def writes(tempo: Tempo) = Json.obj(
    "tempo" -> tempo.tempo,
    "expectedTempo" -> tempo.baseTempo,
    "difference" -> tempo.difference,
    "elapsedTime" -> tempo.timeElapsed
  )
}

implicit val statsWrites = new Writes[Stats] {
  def writes(stats: Stats) = Json.obj(
    "averageTempo" -> stats.averageTempo,
    "medianTempo" -> stats.medianDiff,
    "averageDiff" -> stats.averageDiff,
    "medianDiff" -> stats.medianDiff
  )
}

implicit val wormAnalyserWrites = new Writes[WormAnalyser] {
  def writes(analyser: WormAnalyser) = Json.obj(
    "name" -> analyser.name,
    "buffer" -> analyser.buffer,
    "stats" -> analyser.stats
  )
}

```

Figure 24: Example of the write method used to convert the Tempo and Stats object values to JSON

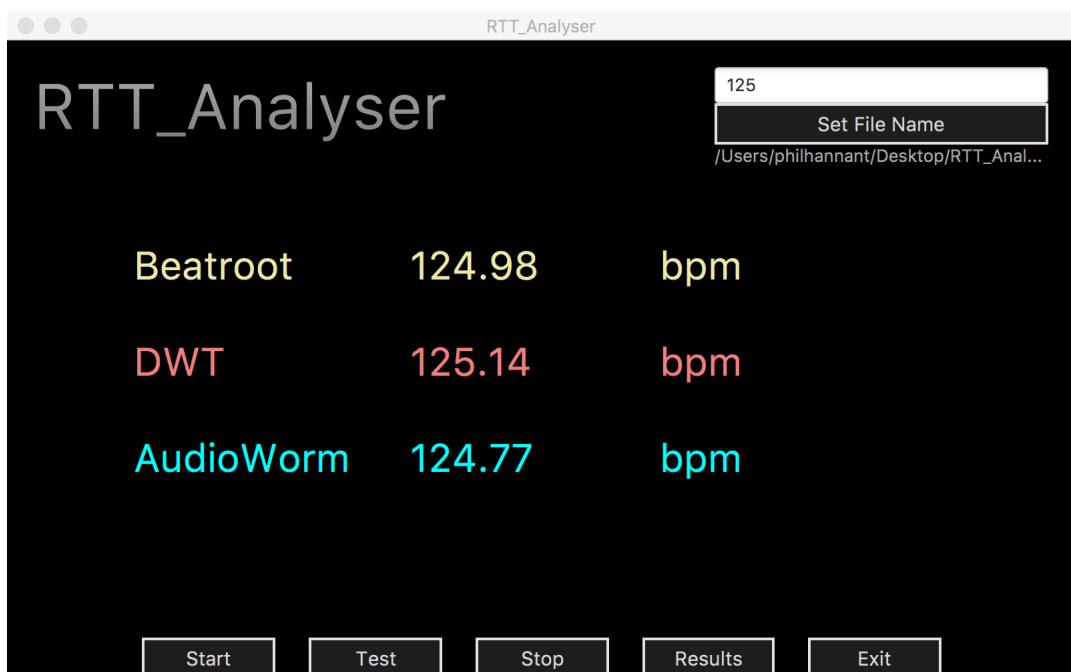


Figure 25: RTT_Analyser's User Interface

/Users/philhannant/Desktop/RTT_Analyser_Data/125-KSH-Fstats.html

	name	stats			
worm: 2016-09-10, 15:14:14 - /Users/philhannant/Desktop/RTT_Analyser_Data/125-KSH-F					
averageTempo		123.9544763975051			
medianTempo		124.90103606095873			
averageDiff		1.0455236024971426			
medianDiff		0.0989639390412691			
totalBeatCount		0.0			
responseTime		1352.0			
	tempo	baseTempo	difference	beatCount	timeElapsed
75.0	125.0	50.0	None	288	
127.28789458592404	125.0	-2.287894585924036	None	823	
125.87298154521555	125.0	-0.872981545215552	None	1352	
125.31883004945115	125.0	-0.3188300494511509	None	1354	
125.75616513363136	125.0	-0.756165133631356	None	1748	
125.50647851018087	125.0	-0.5064785101808695	None	2270	
125.67328506207762	125.0	-0.6732850620776247	None	2662	
125.51415741863974	125.0	-0.5141574186397406	None	3183	
125.57702714515092	125.0	-0.5770271451509217	None	3631	
125.42835991754382	125.0	-0.4283599175438155	None	4184	
125.25676916449262	125.0	-0.2567691644926242	None	4314	
125.26543744866288	125.0	-0.26543744866287966	None	4572	
125.26890509827362	125.0	-0.2689050982736205	None	4832	

Figure 26: Example of the RTT_Analyser’s HTML results view

Table 1: List of Drum Beats Used in RTT-Analyser Tests

Drum Code	Beat	Elements	Style
AMPEDUP	All	Heavy rock, GarageBand stock drum beat	
HT	High tom-tom	Straight	
HTLT	High tom-tom and low tom-tom	Straight	
HTLT2	High tom-tom and low tom-tom	Straight	
K	Bass drum	Straight	
KS	Bass drum and snare drum	Straight	
KS2	Bass drum and snare drum	Straight	
KSCR	Bass drum, snare drum and crash cymbal	Straight	
KSFTTF	Bass drum (four to the floor) and snare drum	Straight	
KSH	Bass drum, snare drum and hi-hat cymbal	Straight	
KSH2	Bass drum, snare drum and hi-hat cymbal	Straight	
KSH2CR	Bass drum, snare drum, hi-hat and crash cymbals	Straight	
KSHCR	Bass drum, snare drum, hi-hat and crash cymbals	Straight	
KSHHTLT	Bass drum, snare drum, hi-hat cymbal, high tom-tom and low tom-tom	Straight	
LT	Low tom-tom	Straight	
MTREVIS	All	Mowtown swing, GarageBand stock drum beat	
OFF-KSH	Bass drum, snare drum and hi-hat cymbal	Offbeat played on hi-hat	
OFF-KSHCRFTTF	Bass drum (four to the floor), snare drum, hi-hat and crash cymbals	Offbeat played on hi-hat	
OFF-KSHFTTF	Bass drum (four to the floor), snare drum, hi-hat cymbal	Offbeat played on hi-hat	
OFF-KSHHCFTTF	Bass drum (four to the floor), snare drum, hi-hat and crash cymbals	Offbeat played on hi-hat	
S	Snare drum	Straight	
SMASH	All	Punk rock (loud), GarageBand stock drum beat	
SW-H	Hi-hat cymbal	Swing	
SW-K	Bass drum	Swing	
SW-KH	Bass drum and hi-hat cymbal	Swing	
SW-KS	Bass drum and snare drum	Swing	
SW-KSH	Bass drum, snare drum and hi-hat cymbal	Swing	
SW-R	Ride cymbal	Swing	
SW-SH	Snare drum and hi-hat cymbal	Swing	

7 Results

The twenty eight sample beats processed by the RTT_Analyser yielded 137,180 separate tempo records. A breakdown of the number of tempo records recorded per beat detection algorithm can be seen in Figure 27. The separate JSON files were then consolidated into one file, converted into a CSV file and connected to the data visualisation software package, Tableau[56].

Total Records	
Beat Detection Name	Count of Tempos
beatroot	11,818
dwt	11,818
worm	113,544
Grand Total	137,180

Figure 27: Total number of tempo values recorded by the RTT_Analyser

7.1 Overall Average Difference

The difference between the expected tempo and the calculated tempo was determined by subtracting the calculated tempo from the expected tempo (8). If the difference is negative then the calculated tempo was greater than expected and if a positive difference was returned the tempo was less than the expected value.

$$\text{difference} = \text{expectedtempo} - \text{calculatedtempo} \quad (8)$$

The average difference for each of the three beat detection algorithms, split by style can be seen in Figure 28. The best performing beat detection method can be seen to be the DWT based algorithm by Tzanetakis *et al's* [18], for the samples without a filter in a Swing style. As mentioned previously, during the testing process some of the tempo results returned were double that of the expected bpm value, possibly due to aliasing. A solution to the aliasing issue, hereafter referred to as doubling, was to add a low-pass filter and looking at the results on the whole it can be considered to have worked to a certain degree. For six out of the nine sets of results, those samples processed with a low-pass filter produced a lower average difference than those without a filter. Although, the margin of error between the expected tempo and the calculated tempo are still suitably large.

A flag was then applied to the results set to highlight any tempo result approximately double the expected value. A record was flagged, if the calculated tempo when divided by the expected tempo returned a result greater or equal to 1.95 (9). The flagged results were then filtered out of the data set and the updated results can be see in Figure 29. With the

Total Average Difference

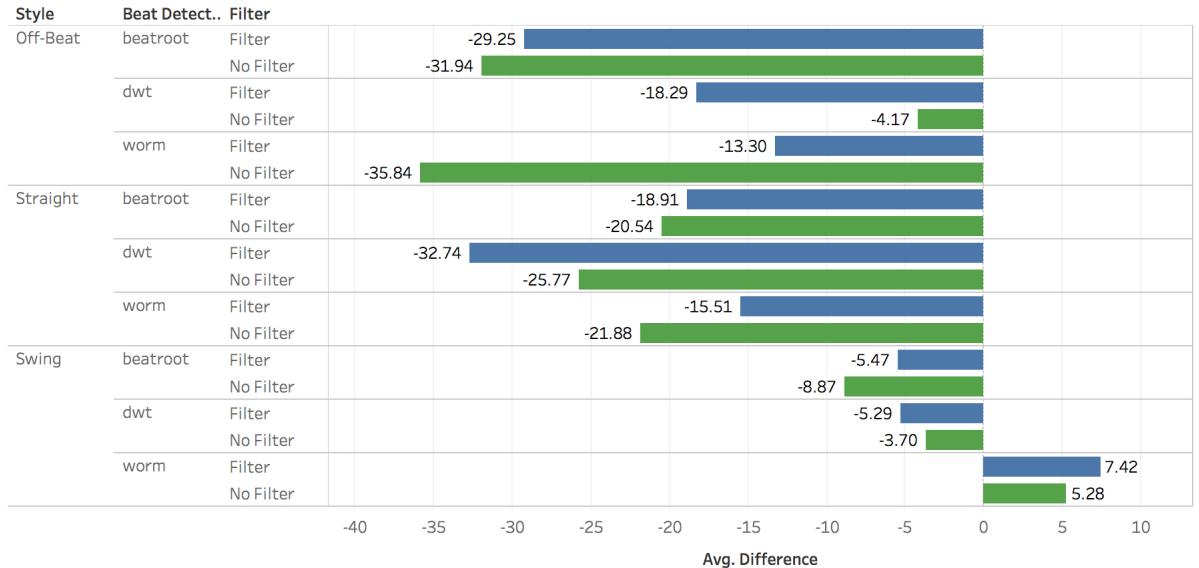


Figure 28: Total average difference results

flagged results removed the average difference value for all of the beat detection algorithms was greatly reduced except for the swing samples processed by the PW.

$$\text{CalculatedTempo}/\text{ExpectedTempo} \geq 1.95 \quad (9)$$

Rather than just removing these results altogether, the next step was to attempt to correct any of the flagged tempo results that when divided by two, were within plus or minus five percent of the expected tempo result. With this adaption applied to the data set (seen in Figure 30), it is clear that overall the Tzanetakis *et al*'s [18] DWT method is the most accurate. The different musical styles within the samples also affect the accuracy of the calculated tempos. With the swing samples producing the least accurate results for all three algorithms.

7.2 Straight Sample Results

The results recorded for the straight sample set clearly show that doubling is an issue, demonstrated by all but one of the results returning a negative value (Figure 31). A large majority of the average difference values are also significantly large (greater than five). It is the Tzanetakis *et al*'s [18] DWT method which exhibits the poorest level of accuracy within this data set. Regularly producing average difference values of greater than twenty.

When the corrected difference values are applied to the data set the accuracy of the Tzanetakis *et al*'s [18] DWT method increases significantly (Figure 32). Although, it does return

Total Average Difference (Flagged Removed)

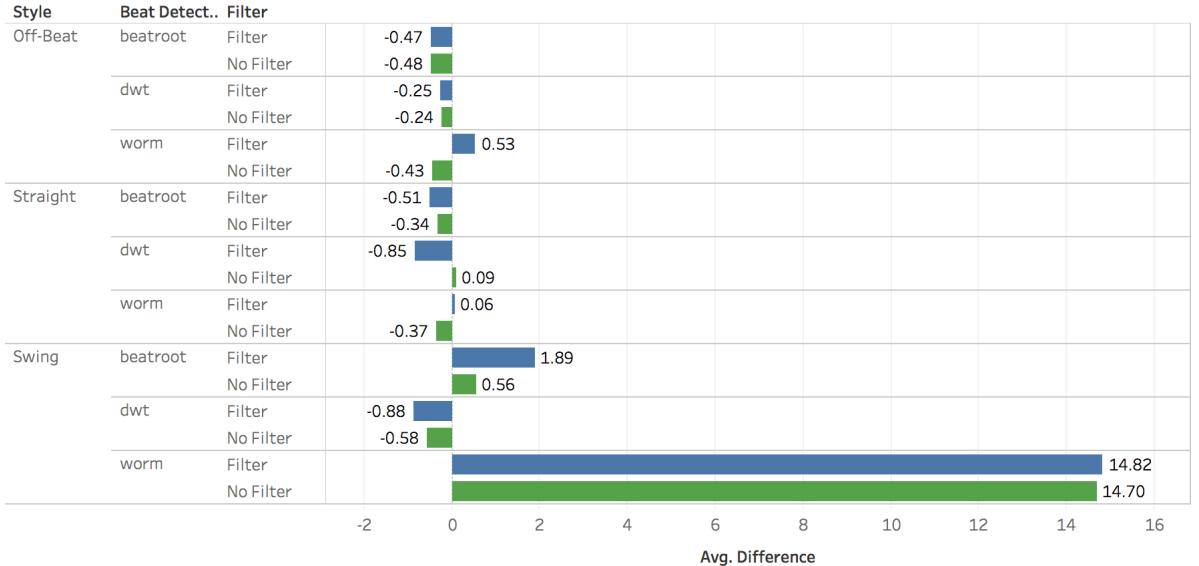


Figure 29: Total average difference results with flagged values removed

its least accurate results for the samples consisting of a crash cymbal and the high and low tom-toms. The affect of the crash cymbal on the accuracy of the tempo recorded confirms the suspicion that loud cymbals will adversely affect the accuracy of the beat detection algorithms. The low accuracy recorded by the DWT method for the HTLT2 sample set where the time element is played on the low tom-tom. Suggesting, the possibility that this method will not respond as well when there are not distinct frequencies playing each part of the drum beat.

Also, within this data set the results produced for the single drum samples can be observed to actually have some of lowest levels of accuracy. This is improved once the corrected values are introduced, suggesting that the issue of doubling was particularly prevalent for these samples.

7.3 Swing Sample Results

The doubling of calculated tempos was not as prevalent within the Swing sample set. Both the original (Figure 33) and the corrected (Figure 34) difference values were significantly high. Although, the Tzanetakis *et al*'s [18] DWT method's accuracy is again improved by the updated difference values, the Beatroot and PW's performance remains very similar across both data sets.

The single drum elements within this data set were expected to cause some problems, due to their use of triplets. This can be seen for both the R and H sample sets within Figure 33. Once the corrected values are applied the DWT method does return a higher level of accuracy. However, the accuracy of both Beatroot and the PW are relatively

Total Average Difference (Corrected)

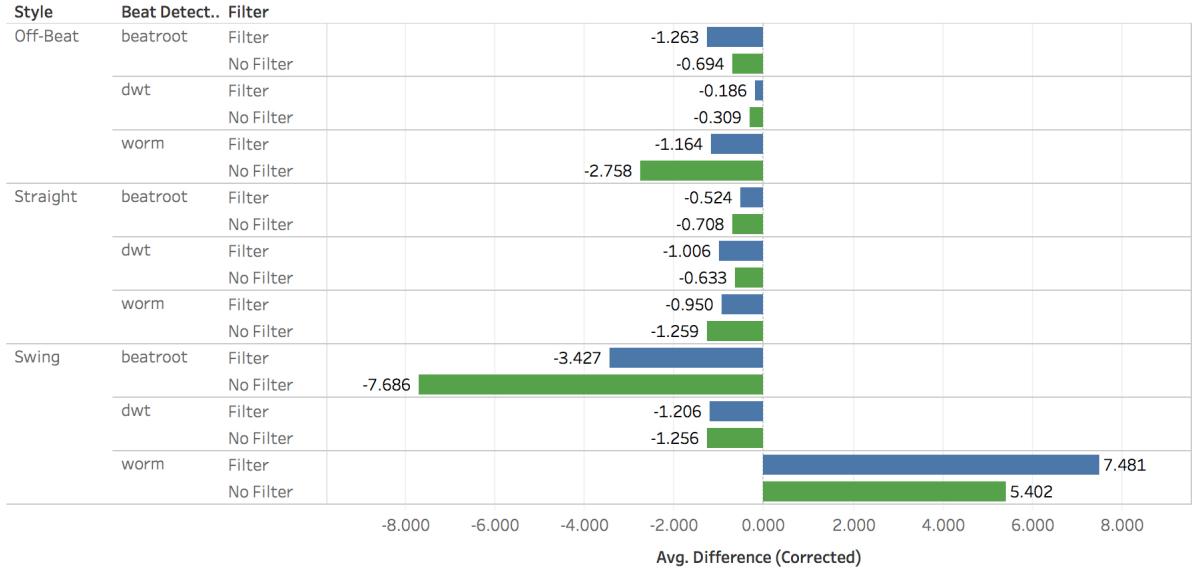


Figure 30: Total average difference results with correction applied

unaffected by the introduction of the corrected values.

7.4 Off-Beat Sample Results

The last group of style results utilise a time element being played on the off-beat. The rest of the beat is considered to be straight. It is to be expected then that the results exhibit a similar amount of potential doubling of the tempo values as with the straight data set (Figure 35).

When the corrected difference values are introduced the accuracy is again improved (Figure 36). For the louder KSHHCRFTTF sample, the Beatroot and PW both recorded a lower level of accuracy with the low-pass filter than without. It is expected that the low-pass filter would help to remove some of the noise produced by the cymbals in this sample. However, this result suggests that by removing the higher frequencies produced by cymbals can adversely affect the accuracy of these two tempo calculation methods.

7.5 Low Tempo Comparison

During the testing process it was noted that the result doubling seemed to be prominent for samples being played at lower tempos. Usually anything with a bpm of one hundred and below. To investigate if the algorithms performed better with higher tempos regardless of style, a doubling count was applied to the data set. Using the same error margin applied previously.

The results viewed in Figure 37, confirm that the all three of the beat detection algorithms produce significantly less doubling when processing drum beats with higher tempos. If the style grouping is introduced (see Figure 38, it is apparent that the doubling is most prevalent with the straight sample set. Out of the three algorithms, the PW returns the highest count of doubled results. Although, this is to be expected as the PW returns a larger number of tempo values per sample.

7.6 Beat Detection Response Time

Due to the smaller window size utilised by the PW it is expected to perform the best within this comparison. The response time was recorded by the RTT_Analyser when the first returned tempo was plus or minus one bpm from the expected tempo result.

Before this could be calculated the all of the tempo results produced by the PW for expected tempos of seventy five were removed. As the PW's first result returned regardless of expected tempo was always seventy five. Despite this and as expected the PW returned the fastest tempo value (see Figure 39). Returning a tempo within the margin of error for the straight KSH2 beat within 0.675 seconds when processing through the low-pass filter. Then without a filter a tempo was produced in 0.660 seconds.

7.7 Overall Tempo Accuracy

The overall tempo accuracy was calculated by counting the number of tempo results that were plus or minus one bpm away from the expected tempo. The results for the three beat detection methods with and without a filter were then compared. A corrected value was also included to show the possible level of accuracy if the issue of doubling was not present (Figure 40).

Unsurprisingly, the Tzanetakis *et al*'s [18] DWT method performed with the highest level of accuracy. Interestingly, without the corrected values all three systems produced a consistent level of accuracy when using the low-pass filter. Without the filter though, the DWT method produced the highest overall accuracy of 71.32% and the PW produced the least of 57.12%.

The corrected results show that there is a clear distinction between the accuracy of the three methods. With the DWT method exhibiting the most potential followed by the Beatroot system and then the PW. The effectiveness of the low-pass filter is hard to ascertain from these results alone. However, based on the five percent increase to the overall tempo accuracy, it can be said that the PW benefited the most from the inclusion of the filter.

7.8 Filter/Non-Filter Comparison

To ascertain the effectiveness of the low-pass filter applied to the RTT_Analyser, the number of uncorrected tempo records within one bpm were collated for the sample sets with and

without a filter. The number of records that fell within this accuracy margin and the percentage of the total number of tempo records can be seen in Figure 41.

The results show a slightly higher level of accuracy is provided for the sample set which used a low-pass filter but it is very marginal. The overall comparison of the total number of records can be seen in Figure 42, which further highlights the slight increase in accuracy offered by the introduction of a low-pass filter.

Straight Sample Set Average Difference

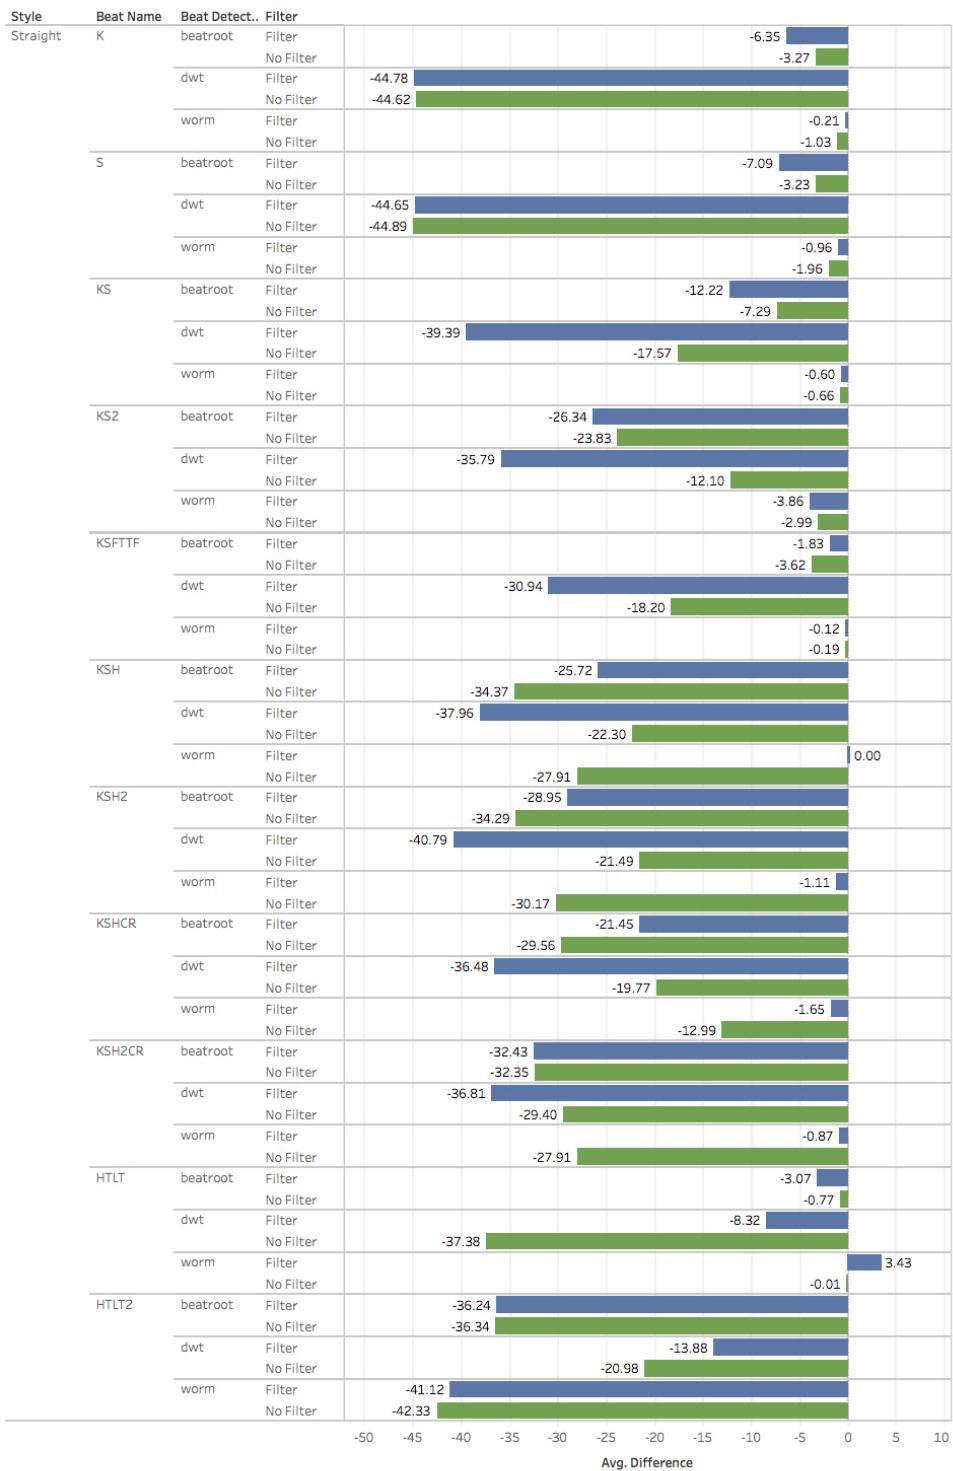


Figure 31: Straight sample set average difference results

Straight Sample Set Average Difference (Corrected)



42
Figure 32: Straight sample set average difference results with correction applied

Swing Sample Set Average Difference

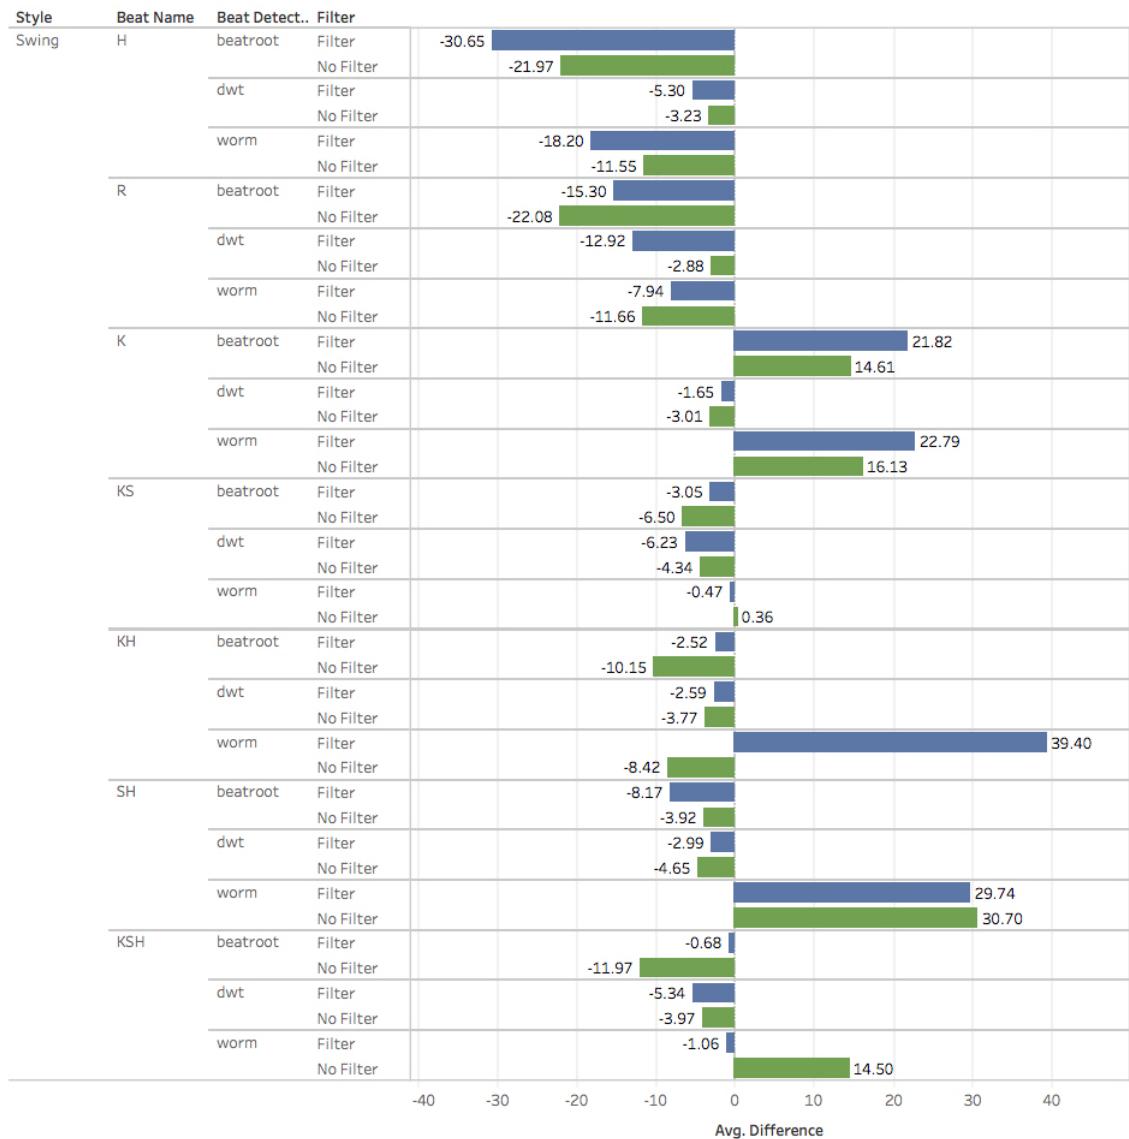


Figure 33: Swing average difference results

Swing Sample Set Average Difference (Corrected)

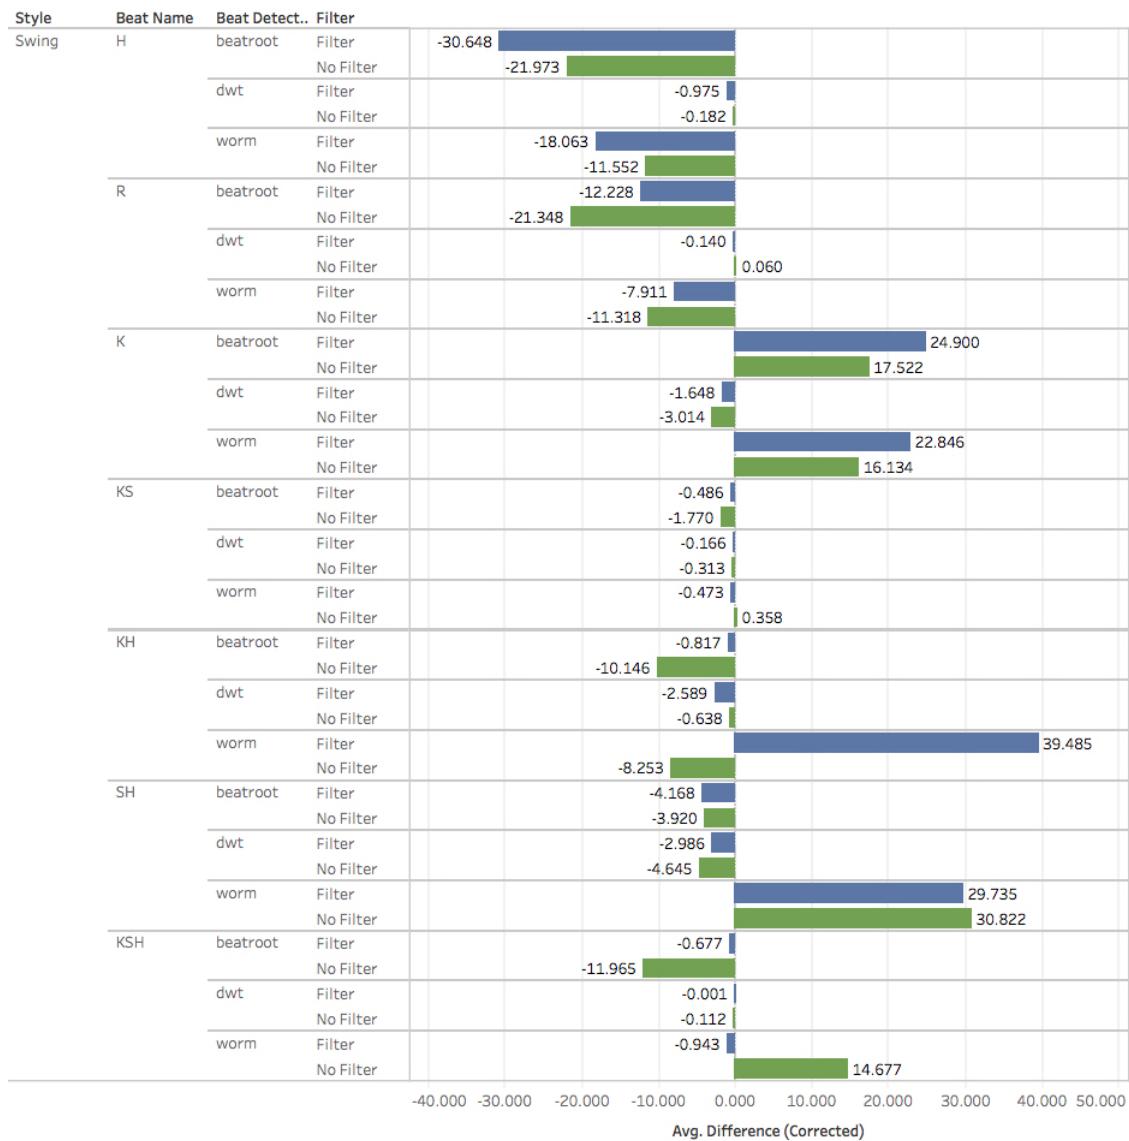


Figure 34: Swing average difference results with correction applied

Off-Beat Sample Set Average Difference

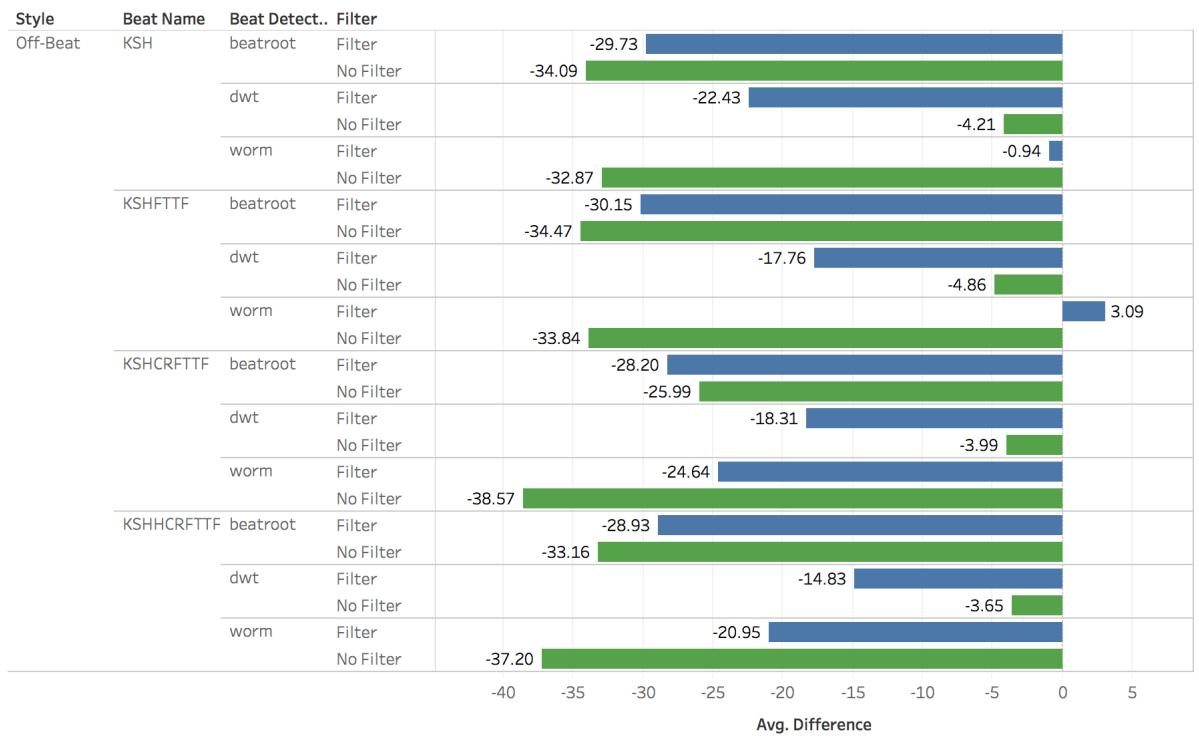


Figure 35: Off-Beat average difference results

Off-Beat Sample Set Average Difference (Corrected)

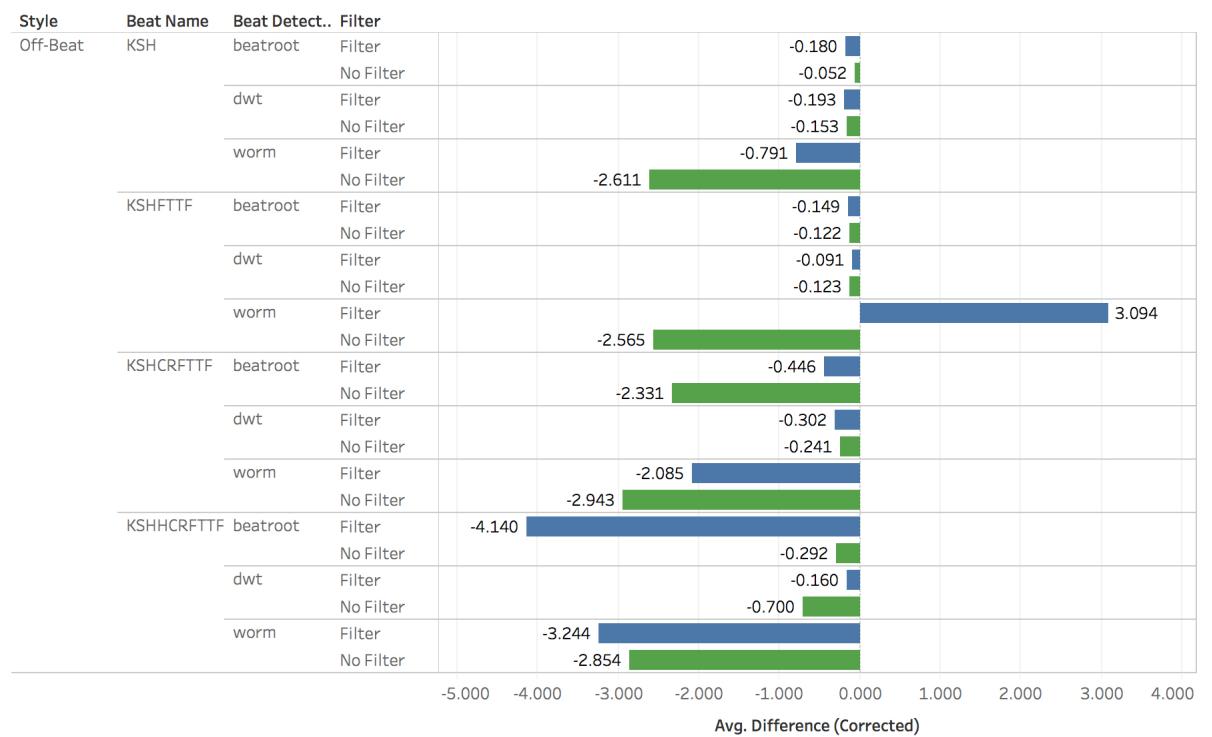


Figure 36: Off-Beat average difference results with correction applied

Low Tempo Doubling Comparison

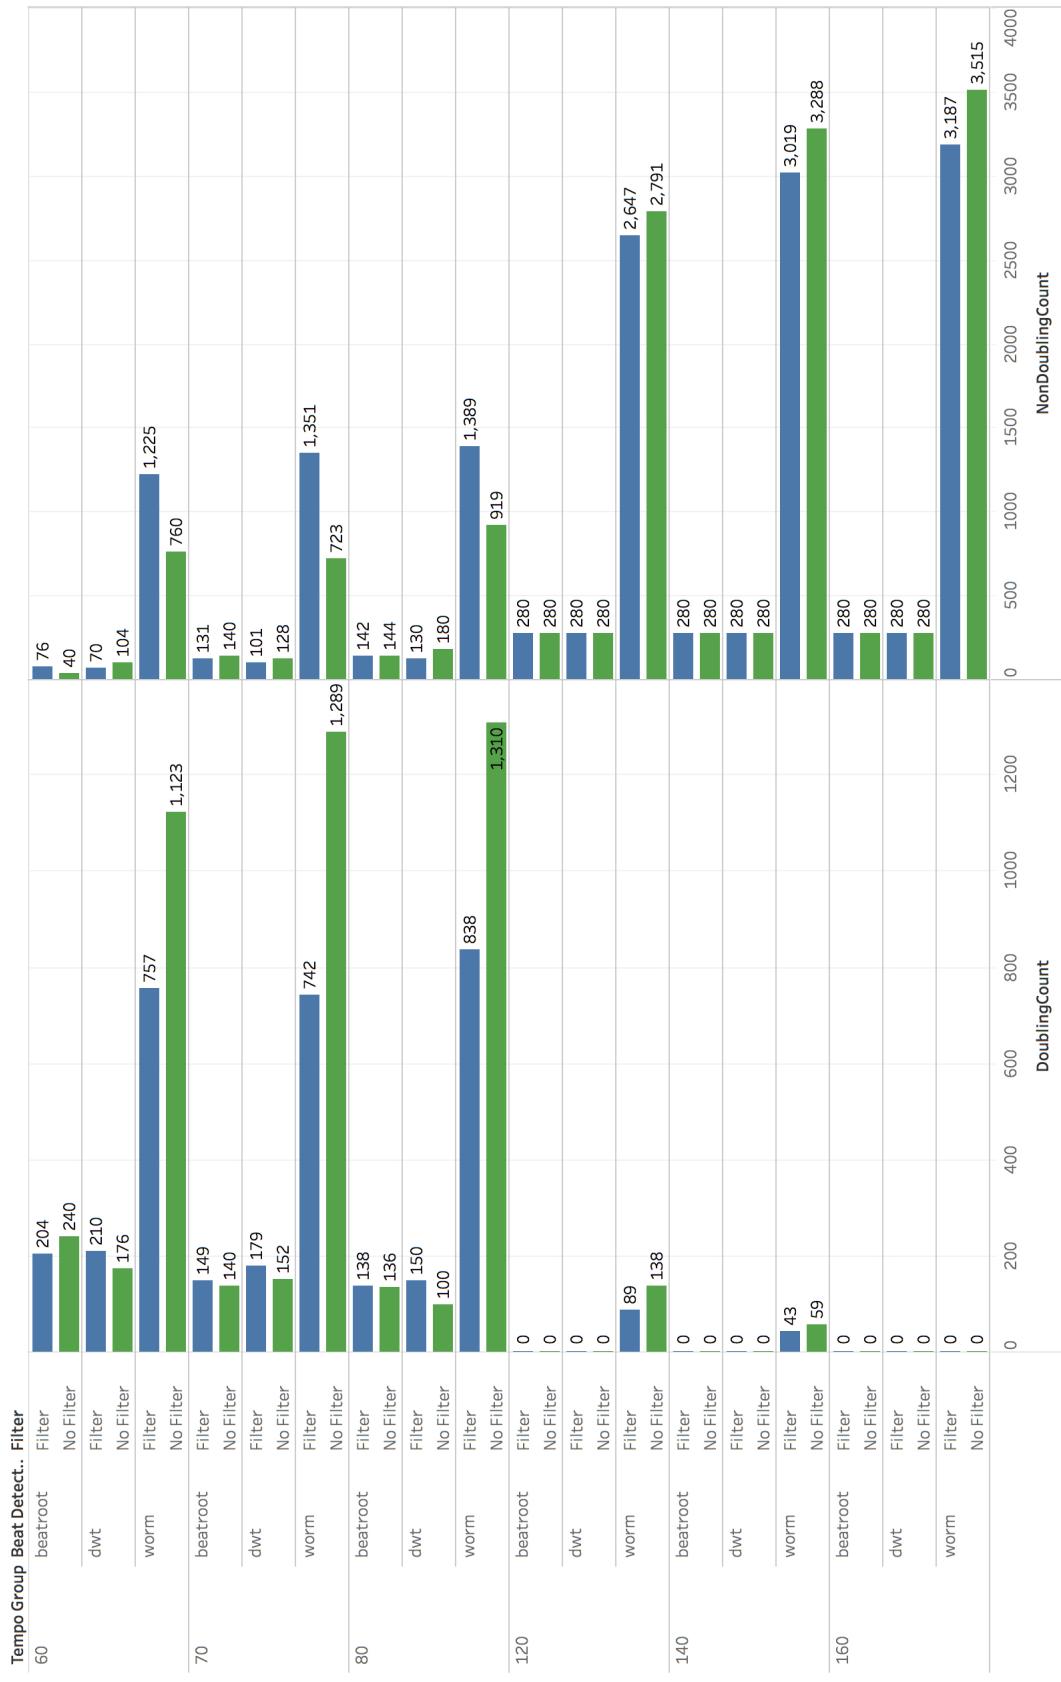


Figure 37: Low tempo comparison



Figure 38: Low tempo comparison with style groupings

Response Times

Beat Detection Name	Filter	Response Time (seconds)
beatroot	F	3.337
	NF	3.293
dwt	F	4.248
	NF	4.23
worm	F	0.675
	NF	0.66

Figure 39: Fastest response times recorded by the RTT_Analyser

Tempo Accuracy

Beat Detection Name	Filter	Tempo Accuracy	Tempo Accuracy (Corrected)
beatroot	Filter	64.22%	83.80%
	No Filter	64.94%	85.99%
dwt	Filter	64.96%	92.33%
	No Filter	71.32%	91.00%
worm	Filter	62.56%	74.04%
	No Filter	57.14%	76.51%

Figure 40: Overall tempo accuracy

Filter Accuracy

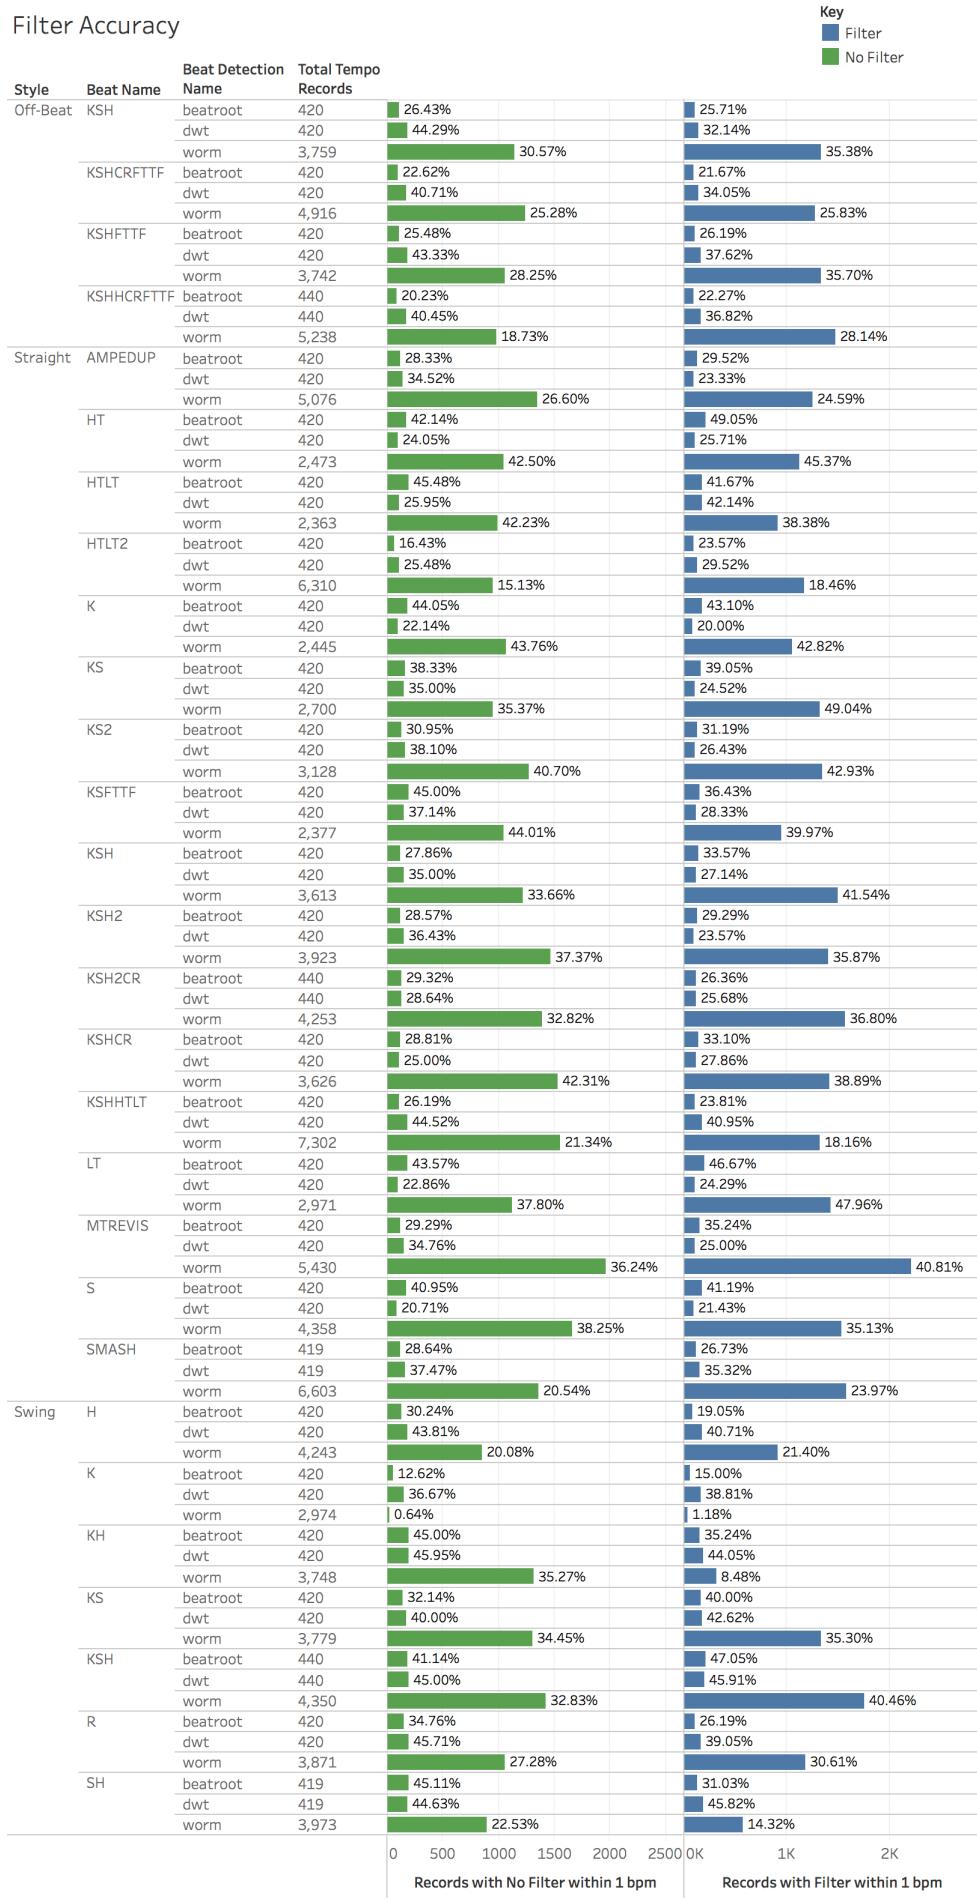


Figure 41: Filter/No Filter Accuracy Comparison, split by style and sample set

Overall Filter/No Filter Accuracy Comparison

Total Records	Records Filter within 1 bpm	Filter Accuracy %	Records No Filter within 1 bpm	No Filter Accuracy %
137,180	42,221	30.78%	41,339	30.13%

Figure 42: Filter/No Filter Accuracy Comparison of total records

8 Evaluation and Discussion

8.1 Project Successes

A key success of the project was during the live audio testing phase of the project, where the RTT_Analyser processed just under ten hours of audio without an issue, producing well over 130,000 different tempo records.

By collecting a large data set, it was possible to confidently assess whether any of the three beat detection algorithms were suitable to be implemented as part of a training tool for drummers. From the data set, it is clear that the Tzanetakis *et al*'s [18] DWT method offers the highest level of accuracy, with the potential of even higher if the issue of doubling is resolved. However, the response time of the Tzanetakis *et al*'s [18] DWT method might be an issue.

Another success was the actor system used in the RTT_Analyser. The development of this system was straightforward and intuitive, it provided a reliable parallel processing and no failures were recorded during the beat detection testing process.

8.2 Project Challenges

One challenge experienced during the development of the RTT_Analyser, was that the adaption of the Beatroot system to work with live audio took longer than anticipated. This was mainly due to the difficulty of working with a large pre-existing code base. To overcome this, the mitigation protocol set out in the project proposal was followed and an alternative system was sourced; the PW. This ensured that the project did not fall any further behind schedule.

The delay in development caused by this issue, led to insufficient time for the author to implement the Tzanetakis *et al*'s [18] beat detection algorithm. Although, there was a mitigation protocol in place, there was insufficient time to implement this, so a different course of action was chosen. A preexisting Scala implementation of the Tzanetakis *et al*'s [18] DWT method by Marco Ziccard[36] was used. Using this implementation, allowed for the regaining of the time lost during the initial failed attempt to adapt the Beatroot system. This ensured the project not only remained on schedule, but there was also sufficient time to try adapting the Beatroot system again. This was completed successfully on the second attempt.

One unforeseen challenge was presented by the original decision to use JSON files for data storage. Due to the inclusion of the PW beat detection algorithm in the RTT_Analyser and the decision to run tests with a low-pass filter and without, the number of records recorded by the RTT_Analyser increased significantly. The original estimate was for approximately 700 files each holding approximately ten results per beat detection method. The final number of results collection was 130,000 plus. JSON is more than adequate for holding this much data, an issue arose when the data visualisation software package, Tableau[56]

was used. As Tableau does not work with JSON files, the data would need to be converted to another format. Due to limited time the data was converted to an Excel[58] file. This required a large amount of data manipulation to be carried out. A number of Visual Basic for Applications (VBA) macros were written to perform the data manipulation, and once the data was in the required format it was connected to Tableau where any further manipulation and analysis of the data could be performed much more efficiently.

8.3 Future Work

There are a number of possible routes to consider with regard to the future development of the RTT_Analyser, including, further investigations into the doubling issue, user interface improvements, adaption of the data storage method, and converting the RTT_Analyser into a mobile training tool application.

A key improvement to the RTT_Analyser would be to alleviate the doubling issue presented during this project. To do this, a function to log the frequencies detected by the beat detection algorithms during live audio capture could be added to the RTT_Analyser. This could be achieved by logging the data produced by the parts of the Beatroot and Tzanetakis *et al's* [18] DWT method that perform the original signal processing. This data can be examined to see if any particular frequencies are the cause of this issue.

Alternatively, the analysis could be performed on the drum beat samples before they are processed by the RTT_Analyser. The goal of this analysis would be to produce a frequency map of the samples. This data could then be compared with the output of the RTT_Analyser in an attempt to discover if there are particular frequencies for which doubling occurs.

The user interface utilised by the RTT_Analyser is intended to be basic, however, if a some new features were added to it it could provide an improved user expereince. One such feature could be a visualisation of the audio as it is being captured, which could assist the frequency map function in determining the cause of the doubling issue.

If further drum beat testing is to be carried out, then adapting the data storage method of the RTT_Analyser from JSON files to a relational database should be considered. One option is to set up a MongoDB[59] database to hold the RTT_Analyser's data. An advantage of this is that the data structure used by MongoDB is very similar to structure of JSON objects. This would enable the existing data structures used by the RTT_Analyser to be maintained. Alternatively, the RTT_Analyser could be adapted to work with an SQL database, which could be the easier option, due to the author's familiarity with SQL.

Although, the accuracy of the beat detection algorithms used in the RTT_Analyser is not on the same level as the midi training tools, they could still provide a useful tool for a drummer. One possible route would be to develop an application for mobile devices which combines a metronome with the RTT_Analyser. A drummer could then use this application to aid their practice session by using the metronome to set the tempo. After a predetermined amount of time the metronome would stop and the drummer continues to play. While doing so, the application would report as to whether they have remained at the same tempo as the

metronome or if their tempo has fluctuated. Such a tool would definitely provide a useful training aid to any drummer wanting to work on their timing.

References

- [1] <http://www.instructables.com/id/What-is-MIDI/>
- [2] Alison Latham
The Oxford Companion to Music, 2002, Oxford University Press
- [3] <https://www.britannica.com/art/metronome>
- [4] Mick Berry and Jason Gianni
The Drummer's Bible: How to Play Every Drum Style from Afro-Cuban to Zydeco, Second Edition, 2004, See Sharp Press
- [5] <https://commons.wikimedia.org/w/index.php?curid=1058005>
- [6] <http://www.tama.com/eu/products/accessories/RW200.html>
- [7] <http://www.roland.co.uk/>
- [8] <http://www.drummagazine.com/lessons/post/drumkey/>
- [9] Paul E. Allen and Roger B. Dannenberg
Tracking Musical Beats in Real Time, International Computer Music Conference, International Computer Music Association, 1990, pp. 140-143
- [10] H. C Longuet-Higgins
Perception of melodies, Nature Vol. 263, 1976, pp. 646-653
- [11] Simon Dixon
Automatic Extraction of Tempo and Beat from Expressive Performances. Journal of New Music Research, 30 (1), 2001, pp 39-58
- [12] Simon Dixon
Onset Detection Revisited, Proceedings of the 9th International Conference on Digital Audio Effects, Montreal, September 2006, pp 133-137
- [13] Simon Dixon
On the Analysis of Musical Expression in Audio Signals. Storage and Retrieval for Media Databases, SPIE-IS&T Electronic Imaging, SPIE Vol. 5021, 2003 pp 122-132
- [14] http://www.music-ir.org/mirex/wiki/2016:Audio_Onset_Detection
- [15] http://www.ieor.berkeley.edu/ieor170/sp15/files/Intro-to-Sonic-Events_Campion.pdf
- [16] Juan Pablo Bello, Laurent Daudet, Samer Abdallah, Chris Duxbury, Mike Davies, and Mark B. Sandler *A Tutorial on Onset Detection in Music Signals, IEEE TRANSACTIONS ON SPEECH AND AUDIO PROCESSING, VOL. 13, NO. 5, 2005, pp. 1035 - 1047*
- [17] http://www.music-ir.org/mirex/wiki/2005:Main_Page

- [18] George Tzanetakis, Georg Essl and Perry Cook
Audio Analysis using the Discrete Wavelet Transform, Proc. WSES International Conference on Acoustics and Music: Theory and Applications (AMTA), 2001
- [19] http://www.music-ir.org/mirex/wiki/2006:Audio_Beat_Tracking_Results
- [20] Simon Dixon
Evaluation of the Audio Beat Tracking System BeatRoot. Journal of New Music Research, 36, 1, 2007, pp 39-50
- [21] <http://users.rowan.edu/~polikar/WAVELETS/WTpart2.html>
- [22] Richard G. Lyons
Understanding Digital Signal Processing, Third Edition, Prentice Hall, 2010
- [23] Tao Li, Mitsunori Ogihara, George Tzanetakis
Music Data Mining, CRC Press, 2002, pp 45-53
- [24] George Tzanetakis and Perry Cook
Musical Genre Classification of Audio Signals, IEEE TRANSACTIONS ON SPEECH AND AUDIO PROCESSING, VOL. 10, NO. 5, JULY 2002
- [25] Steven W. Smith
The Scientist and Engineer's Guide to Digital Signal Processing, California Technical Publishing, 2011, Chapter 3
- [26] Ramn Palls-Areny and John G. Webster
Analog Signal Processing, Wiley, 199, pp. 231
- [27] Simon Dixon, Werner Goebel and Gerhard Widmer
The Performance Worm: Real Time Visualisation of Expression based on Langners Tempo-Loudness Animation, International Computer Music Conference, 16 - 21 September 2002, Gteborg, Sweden, pp 361-364.
- [28] Bill Waggner
Pulse Code Modulation Techniques
- [29] Oracle
<https://docs.oracle.com/javase/tutorial/sound/>
- [30] Akka
<http://doc.akka.io/docs/akka/2.4.9/scala/actors.html>
- [31] Jonas Bonr, Dave Farley, Roland Kuhn, and Martin Thompson
Reactive Manifesto, http://www.reactivemanifesto.org/
- [32] Akka
<http://doc.akka.io/docs/akka/2.4.9/general/actor-systems.html>
- [33] Josh Suereth and Matthew Farwell
SBT in Action: The simple Scala build tool, Manning Publications, 2015

- [34] Oracle
https://docs.oracle.com/javase/8/docs/technotes/guides/sound/programmer_guide/contents.html
- [35] <https://github.com/ederwander/Beat-Track>
- [36] <https://github.com/mziccard/scala-audio-file>
- [37] Andrew Greensted <http://www.labbookpages.co.uk/audio/javaWavFiles.html>
- [38] Marius Eriksen
Effective Scala, <http://twitter.github.io/effectivescala/>
- [39] Martin Odersky, Lex Spoon and Bill Venners
Programming in Scala, Second Edition, Artima Press, 2010
- [40] <https://www.playframework.com/documentation/2.5.x/ScalaJson>
- [41] <http://www.json.org/>
- [42] <https://www.playframework.com/documentation/2.5.x/api/scala/index.html#play.api.libs.json.Writes>
- [43] <http://www.scalafx.org/docs/home/>
- [44] <http://www.agiledata.org/essays/tdd.html>
- [45] <http://www.agiledata.org/essays/databaseRefactoring.html>
- [46] Daniel Hinojosa
Testing in Scala, O'Reilly Media, 2013
- [47] <http://www.apple.com/uk/mac/garageband/>
- [48] <http://www.soundonsound.com/sos/may02/articles/synthsecrets0502.asp>
- [49] Tom O'Haver
A Pragmatic Introduction to Signal Processing with applications in scientific measurement, <https://terpconnect.umd.edu/~toh/spectrum/>, last update 2016
- [50] <https://csd.wisc.edu/vcd202/rms.html>
- [51] Doug Kaye
Loosely Coupled: The Missing Pieces of Web Services, RDS Press, 2003
- [52] <https://developer.apple.com/library/mac/documentation/General/Conceptual/DevPedia-CocoaCore/MVC.html>
- [53] Tony Bevis *Java Design Pattern Essentials, Ability First*, 2012
- [54] <http://www.cs.umd.edu/class/sum2003/cmsc311/Notes/Data/endian.html>
- [55] <http://docs.oracle.com/javase/8/javafx/getstartedtutorial/jfx-architecture.htm#A1106328>
- [56] <http://www.tableau.com/>

- [57] B. S. Everitt and A. Skrondal *The Cambridge Dictionary of Statistics, Fourth Edition*, Cambridge University Press, 2010
- [58] <https://products.office.com/en-gb/excel>
- [59] <https://www.mongodb.com/>
- [60] <http://www.badlogicgames.com/wordpress/?p=161>
- [61] http://www.jsresources.org/faq_audio.html#frame_size

A Drum Sample Beat Patterns

Basic grid layout of the drum samples processed by the RTT_Analyser.

Beat Name	K									
	1			2			3		4	
Kick	Yellow			Yellow			Yellow		Yellow	
Snare										
High Tom-tom										
Low Tom-tom										
Hi-Hat										
Ride										

Beat Name	S									
	1			2			3		4	
Kick										
Snare	Red			Red			Red		Red	
High Tom-tom										
Low Tom-tom										
Hi-Hat										
Ride										

Beat Name	KS									
	1			2			3		4	
Kick	Yellow									
Snare				Red					Red	
High Tom-tom										
Low Tom-tom										
Hi-Hat										
Ride										

Beat Name	KSH									
	1			2			3		4	
Kick	Yellow						Yellow			
Snare				Red					Red	
High Tom-tom										
Low Tom-tom										
Hi-Hat	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
Ride										
Crash										




Beat Name	KSHCR									
	1			2			3		4	
Kick	Yellow						Yellow			
Snare				Red					Red	
High Tom-tom										
Low Tom-tom										
Hi-Hat	Green	Green	Green	Green	Green	Green	Green	Green	Green	Green
Ride										
Crash	Blue				Blue			Blue		Blue

Beat Name	HT									
	1			2			3		4	
Kick										
Snare										
High Tom-tom	Blue			Blue			Blue		Blue	
Low Tom-tom										
Hi-Hat										
Ride										
Crash										

Beat Name	LT			
	1	2	3	4
Kick				
Snare				
High Tom-tom				
Low Tom-tom	█	█	█	█
Hi-Hat				
Ride				
Crash				

Beat Name	HTLT			
	1	2	3	4
Kick				
Snare				
High Tom-tom		█		█
Low Tom-tom	█		█	
Hi-Hat				
Ride				
Crash				



Beat Name	KSHHTLT			
	1	2	3	4
Kick	█			
Snare		█		
High Tom-tom			█	█
Low Tom-tom	█	█	█	█
Hi-Hat	█	█	█	█
Ride				
Crash				

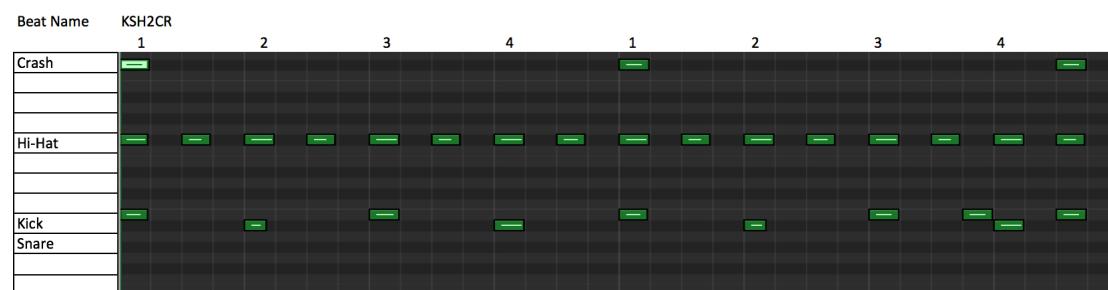
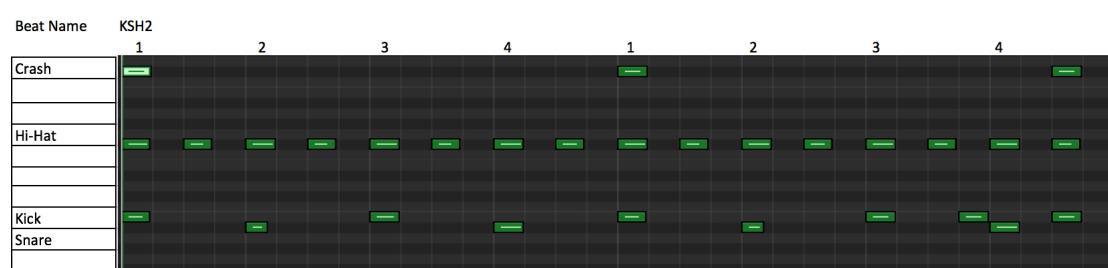
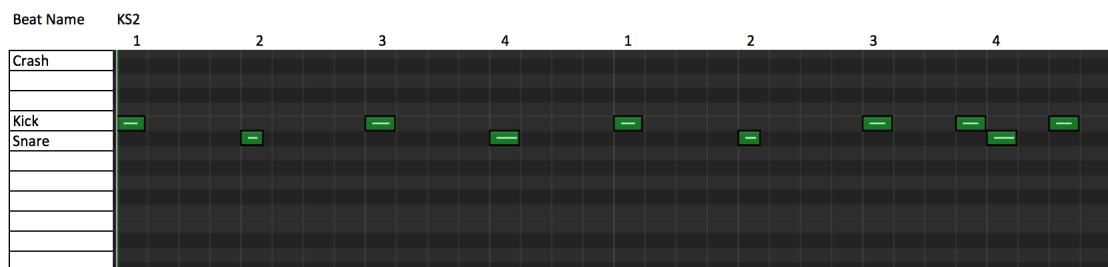


Beat Name	OFF-KSH			
	1	2	3	4
Kick	Yellow		Yellow	
Snare		Red		Red
High Tom-tom				
Low Tom-tom				
Hi-Hat	Green	Green	Green	Green
Ride				
Crash				

Beat Name	OFF-KSHFTTF			
	1	2	3	4
Kick	Yellow	Yellow	Yellow	Yellow
Snare		Red		Red
High Tom-tom				
Low Tom-tom				
Hi-Hat	Green	Green	Green	Green
Ride				
Crash				

Beat Name	OFF-KSHCRFTTF			
	1	2	3	4
Kick	Yellow	Yellow	Yellow	Yellow
Snare		Red		Red
High Tom-tom				
Low Tom-tom				
Hi-Hat	Green	Green	Green	Green
Ride	Blue	Blue	Blue	Blue
Crash	Blue	Blue	Blue	Blue

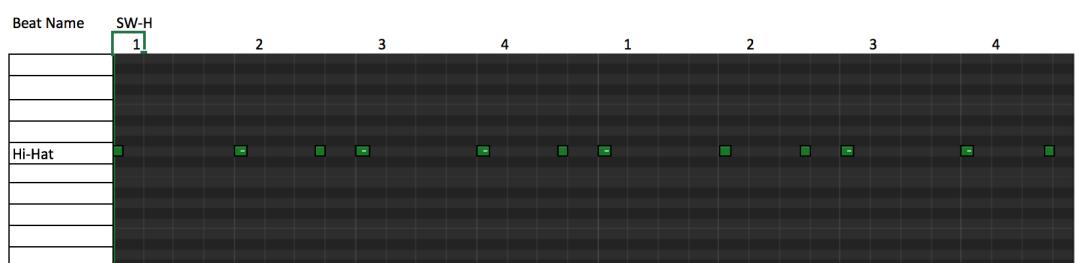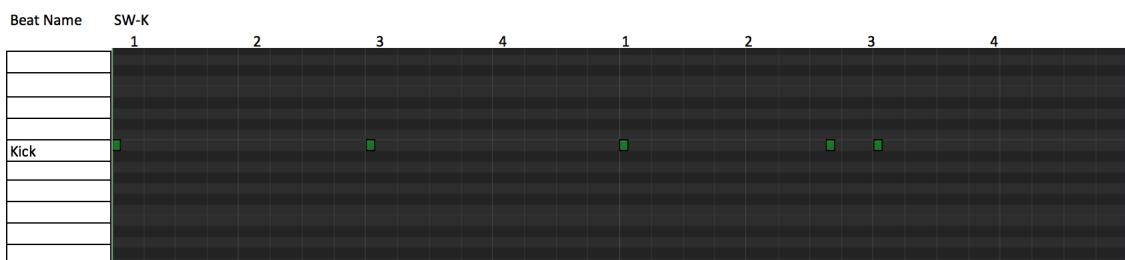

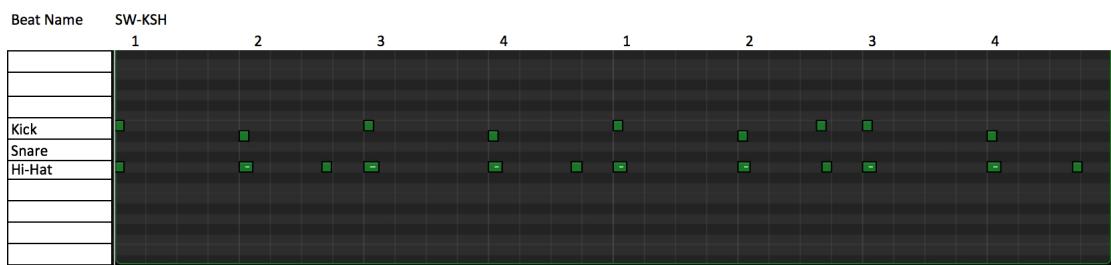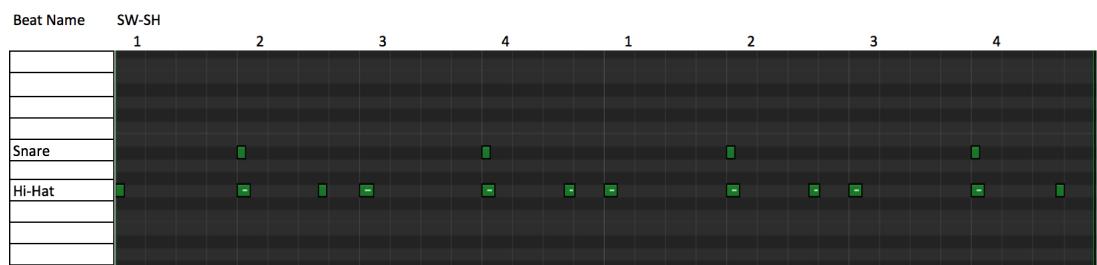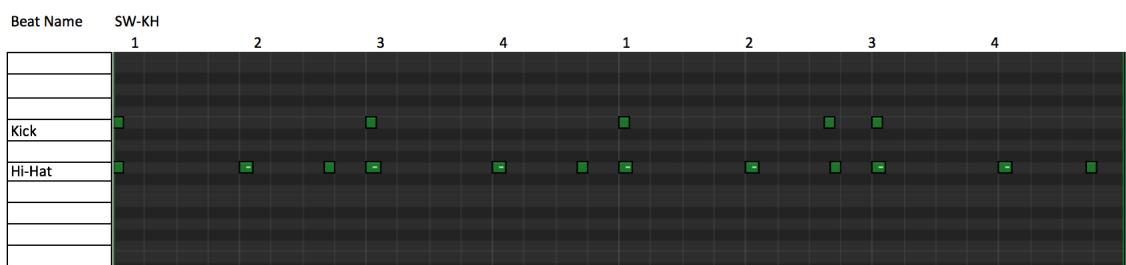

B Project Programming Code

A cd containing the all of the programming code for the project is included here. Within the existing systems used in the project the following adaptions were made:

WaveletBPMDetector	bpm method
AudioProcessor (Beatroot)	ProcessFile method
BeatTrackDisplay (Beatroot)	beatTrack
AudioWorm (PW)	Low pass filter added and addBytes method