



ZENITH CRUSHING PLANT SOLUTION & QUOTATION

LOCATION: South Africa

MACHINE: Jaw Crusher & Impact crusher

ATTN: CARMEUSE

DATE: June 12th, 2026



Shanghai Zenith Mineral Co., Ltd.

Add: No.1688 East Gaoke Road, Shanghai, China

Tel: 0086-58385015 Fax: 0086-21-58385887

Mobile: +86 18301908050 E-mail: andy@zenith-crusher.com

Crush Rocks, Build Dreams!



- *More than 30 years experience*
- *6 Factories, totally 300000m2*
- *Over 170 countries & regions*
- *32 Branches world widely*
- *260 experts and engineers*
- *More than 1,600 employees*

QUOTATION SUMMARY LIST

ITEM	DESCRIPTION	Subtotal Price(USD)
PART-1	Main Machines Price	\$323,666
PART-2	2 years' Spare Parts Price(Optional)	\$89,146
PART-3	Detailed commercial terms	
<u>Total FOB Shanghai Price</u>		<u>\$412,812</u>
<u>Sea Freight & Insurance to Cape Town Port</u>		<u>very unstable, up to ready for delivery</u>
<u>Total CIF Cape Town Price</u>		<u>£</u>

Note:

Note: The above goods including the free parts with CE certificate and follow ISO9001 standard;

Motors(Siemens or ABB Brand);

Bearings(American Timken or SKF Brand);

Steel supplier: Chinese Bao Steel.www.baosteel.com)





SHANGHAI ZENITH MINERAL CO.,LTD.

Add: No.1688 East Gaoke Road, Shanghai, China

Tel: 0086-21-58386085 Fax: 0086-21-58385887

E-mail: andy@zenith-crusher.com

PART-1: Quotation of Main Machine

No.	Item	Model	Unit Price	Qty	Sum Price
			(USD)	(SET)	(USD)
1	C6X Jaw Crusher including ABB Motor	C6X100 (CR.5009)	\$105,209	1	\$105,209
2	CI5X Impact Crusher including ABB Motor	CI5X1315 (CR.5107)	\$106,769	1	\$106,769
3	S5X Vibrating Screen including ABB Motor	S5X2760-3 (SR.5007)	\$46,323	1	\$46,323
4	S5X Vibrating Screen including ABB Motor	S5X3075-2T (SC5105)	\$65,366	1	\$65,366
5	Total FOB Shanghai Price				\$323,666

- SR.5007 screen mesh: 20mm, 40mm, 80mm: SC.5105 screen mesh: 2mm, 15mm.
- CR.5107 transfer system and frame is suitable for 250kw continuous operation; three layers impact plates; rotor speed adjustment: motor wheel
- jaw plates life span: 3000working hours, hammer: 2500working hours. ABB motor, bearing and hydraulic parts are Chinese famous brand

Note:

1.The above quote include the main units and auxiliary facilities including motor, motor base, v-belt,rail,bolts,etc. All equipments with rustproof paint.

2.Descriptions on above equipments:

Note: The above goods passed CE, CQC certificate and follow ISO9001 standard; Motors for crushing units are **Siemens Brand**, the Components of Control Systems are **Siemens** or **ABB brand**; Bearings(American **Timken Brand**); The steel of the main structure is the Q235 (UK standard is 4360-40B(C), and USA K02502), the steel is from Chinese biggest and best steel company **Bao Steel** (<http://www.baosteel.com>). We accept the buyer's inspection or the Third Part inspection(SGS, AI,COTECNA)

3.The Quotation doesn't include the Diesel generator Set and cables.

PART-2: Quotation of 2 years' Spare Parts (Optional)
We do suggest you buy the spare parts for long term operation

No.	Model	Item	Unit price (USD)	Qty (SET)	Amount (USD)	Subtotal (USD)	Picture
1	Jaw Crusher C6X100	Fixed jaw plate	3731	2	7462	15359	
		Mobile jaw plate	2638	2	5277		
		Side protect plate(left)	388	1	388		
		Side protect plate(right)	388	1	388		
		Toggle plate	312	3	936		
		V-belt	109	5	543		
		Spring	122	3	365		
2	Impact Crusher CI5X1315	Hammer	7866	3	23598	47581	
		Impact Plates	5700	3	17100		
		Lining Plates	5695	1	5695		
		V-belt	238	5	1188		
4	Vibrating Screen S5X3075-2T	Screen Mesh	2443	5	12214	12615	
		Rubber Spring	1244	3	3733		
		V-belt	80	5	400		
5	Vibrating Screen S5X2760-3	Screen Mesh	2638	5	13191	13592	
		Rubber Spring	829	3	2488		
		V-belt	80	5	400		
6	Total FOB Shanghai Price					89146	

Commercial Terms

1. Manufacturing Period: The production will be finished within 60 working days. The seller shall not be liable for failure or delay of the delivery in consequence of any Force Majeure incidents or any serious anthropic factor caused by the buyer.

2. Price terms: CIF Cape Town.

3. Delivery Period: The shipment will be done within 15 working days after receive the payment of the balance. The seller will do the inspection, commissioning, disassembly and packing balance in these days.

4. Packing: The products should be processed to be rustproof and moisture proof before delivery. The small parts are packed into wooden crates; the big parts are wrapped by plastic sheeting.

5. Payment: A. 30% deposit of total amount to be paid after signing the sales contract, 60% after inspect in factory, 10% after installation but no longer than 6months of bill of lading.

6. Installation: If required, we will send the engineer to guide your workers to install the machine, take trial run; the buyer should prepare the materials and tools needed, and offer necessary assistance. The actual expenses incurred for accommodation, to and fro travel for the engineer, and insurance, should be borne by the buyer. In addition, the buyer should pay USD 100 dollars to the technician(s) per person per day as salary in the first 60 days; USD 150 dollars for the rest days.

7. Warranty: 100% brand new when leaving the factory. The seller guarantee quality of the machines (excluding wearing parts)for a period of one year from the date of trial run finish, but not to exceed 15 months from date on which machine leaves the factory.

8. Valid time: This quotation will be effective within 90 days after issuing

9. Bank Information:

BENEFICIARY: SHANGHAI ZENITH MINERAL CO.,LTD.

ADDRESS: Add: No.1688 East Gaoke Road, Shanghai, China.

BANK NAME: SHANGHAI PUDONG DEVELOPMENT BANK, SHANGHAI (NANHUI SUB—BRANCH).

ACCOUNT NUMBER: 9810 1454 7400 00726

SWIFT CODE: SPDBCNSHXXX

BANK ADDRESS: 3388 RENMIN DONG ROAD, HUINAN COUNTY, PUDONG NEWAREA, SHANGHAI, P.R.C.

TECHNICAL SPECIFICATION

We pursue the zenith of technology and quality

**Crush Rocks
Build Dreams**

JAW CRUSHER




Main Structure

- | | |
|-----------------------|-----------------------|
| 1. Flywheel | 7. Lower Lining Plate |
| 2. Upper Lining Plate | 8. Movable Jaw |
| 3. Movable Jaw | 9. Toggle Plate |
| 4. Movable Jaw Plate | 10. Adjustment Device |
| 5. Fixed Jaw Plate | 11. Tension Rod |
| 6. Frame | 12. Spring |

Specifications

MODEL	C6X100
FEED OPENING	760×1000MM
MAX FEEDING SIZE	630MM
SETTING ADJUSTMENT	70-175MM
OVERALL DIMENSION	3700×2440×2520MM
TYPE	SINGLE TOGGLE
CAPACITY	130-420TONS PER HOUR
MOTOR POWER	110KW-4P
FRAME	Q345
MOVABLE PLATE	HIGH MANGANESE STEEL
FIXED PLATE	HIGH MANGANESE STEEL
TOGGLE PLATE	CAST STEEL
SIDE PLATE	HIGH MANGANESE STEEL
SPRING ROD	CARBON STEEL
SPRING	SPRING STEEL
SHIM	CARBON STEEL

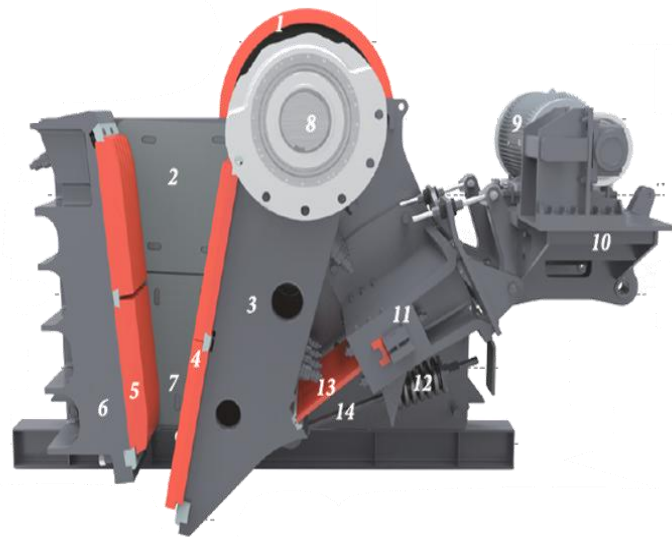





Advantages

1. Detachable frame -Higher strength
2. Upgraded cavity -Higher crushing efficiency
3. Integrated design -Smaller installation space
4. Elastic damping anchors -Decreasing equipment impact.
5. Flexible switching between fixed and mobile operations.



Technical Features

• Big capacity Higher efficiency	The C6X series jaw crusher adopts a high-efficiency and high-capacity design concept.	
	Optimized crushing cavity structure, movable jaw motion trajectory and speed parameters, reasonable moment of inertia and a larger crushing	
	same size higher capacity, same css, 20% higher fine size than traditional jaw crusher	
Higher strength more reliable Better material, no welding, combining the advantages of casting and steel plate.	movable jaw: heavy-duty design, Better castingmaterials material	
	Main shaft: better material, Large size heavy forged eccentric shaft	
	Bearing house:integrated casting design, more reliable	
	Flywheel and pulley:using upgraded materials & Adopting star-shaped reinforcement design with high moment of inertia, higher strength	
	Bearing: four bearing same size, reliable&universal	
	Frontand rear wall panels: The improvement of castingmaterials has doubled the toughness and impact energy of PE and PEW (now it is low alloy cast steel G20Mn5(the reverse frame material of EMU), while others use ordinary cast steel).	
	Side plate: European standard material S355	
	Side guard plate: Q355B,	
	CNC finishing, interchangeable combination frame,easywaytochangebrokenstuff,without the need to change the whole frame	
	No welding, High strength bolt and pin connection, fundamentally avoid the generation ofinternal stress, completely avoid the risk of body cracking	
Easy mainteance	Standard feeding hopper and V-belt protect cover	
	Hydraulic wedge adjustment, faster and more precise	
	Automatic centralized lubrication, save cost on grease and labor, also save time and increasing the profits	
Faster installation	Integrated motor base design, save room and foundation cost for motor, decrease the shocking,	
	Elastic limit blocks and rubber shock absorbers replace rigid anchor bolt connections.	



IMPACT CRUSHER



Main Structure

- | | |
|----------------------|--------------------------------|
| 1. Lining Plate | 6. Impact Plate |
| 2. Lower Frame | 7. Impact Rack |
| 3. Main Shaft Pulley | 8. Upper Frame |
| 4. Rotor | 9. Hydraulic Regulation Device |
| 5. Hammer Bar | 10. Hydraulic Jacking Device |



Specifications

MODEL	CI5X1315
FEEDING OPENING	1540X930 MM
MAX FEEDING SIZE	600 MM
SPEC OF ROTOR	Φ1300X1500 MM
OVERALL DIMENSION	2880X2755X2560MM
CAPACITY	250-350 TPH
POWER	4P-250KW
MAIN FRAME	Q345
BLOW BAR	HIGH CHROMIUM STEEL
LINING PLATE	HIGH MANGANESE STEEL
IMPACT CURTAIN	HIGH MANGANESE STEEL
ACCESSORIES	HYDRAULIC STATION 1 SET


Advantages

1. Integrated application of latest scientific research achievements
2. High standard raw materials ensuring high strength of equipment
3. Ergonomics design theory reducing operation cost
4. Selection from a variety of coarse and medium-fine crushing models

Technical Features


Multi-functional Full-Hydraulic System

Multi-function full-hydraulic operating system, make it easier to accurately and rapidly adjust the clearance, saving both labor and time, improves the operation rate of the equipment. The hydraulic cylinder of the lifting and closing device can be directly driven, facilitating maintenance of hammer bars and impact blocks hence reducing production interruption time.

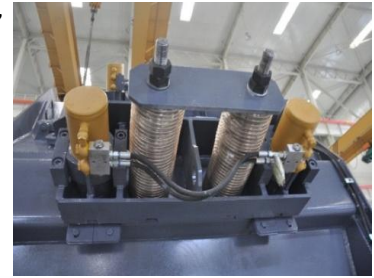

Great-rotation-inertia high-precision Heavy Rotor Design

Great-rotation-inertia high-precision Heavy Rotor Design, equipped with high-quality bearing to ensure the rotor has great load ability, high rotation precision. Material breakage after full acceleration produce greater reduction ratio; Under heavy load, the high inertia of the rotor, more effectively crushing materials, the automatic overload protection function of the impact racks can ensure the safe and stable operation of the

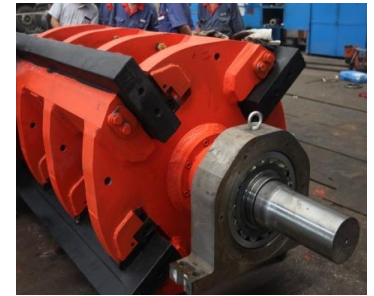

High Standard Raw Materials

Lightweight frame, High-precision shaft, High-strength impact rack, Highly wear-resistant hammer bars to make CI5X series impact crushers present higher reliability, safety and strength, also the crusher maintenance costs are greatly reduced with the service life extended.




Involutes High efficiency crushing cavity

Involutes high-efficiency crushing cavity processes materials of larger feeding size. It can be used in medium-hard and soft rocks. Undergoing multiple impact in the crushing cavity, rocks break into high quality cubic aggregates satisfying production requirements



Cavity and Application

CI5X series impact crusher have both two-cavity and three-cavity design, suitable for both primary and secondary crushing. Two-cavity has higher crushing chamber and feeding opening for bigger raw material, while the three-cavity design has a third adjustable breaking curtain giving higher reduction ration and finer sizes of products.

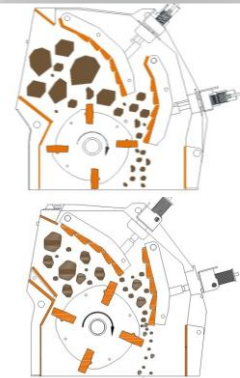

VIBRATING SCREEN




Specifications

MODEL	S5X2760-3
SCREEN SPEC.(m ²)	2700X6000MM
NO. OF LAYERS	3
SCREEN MESH SIZE	1-70MM
FEED SIZE	≤200 MM
DOUBLE AMPLITUDE	7-11 MM
VIBRATING FREQUENCY	800-900 R/M
OVERALL DIMENSION	6223×4570×4038
CAPACITY	120-900T/H
WEIGHT	13T
MOTOR	37KW
FRAME	Q345
SIDE PLATE	Q355B
SCREEN MESH	60SIMN
SPRING	RUBBER SPRING

Main Structure

- | | |
|---------------|-------------------------|
| 1. Screen box | 5. Driving Device |
| 2. Spring | 6. Motor |
| 3. Bracket | 7. Transmission Support |
| 4. Vibrator | |

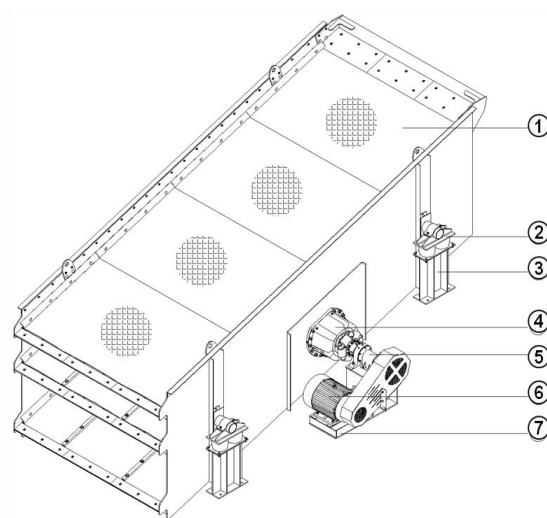

Advantages

1. Bigger capacity and high pressure resistance.
2. Lower operating temperature due to open type oil lubrication.
3. Optional frequency controller for wider applications.
4. Continuous feeding and starting with load.

VIBRATING SCREEN


Specifications



MODEL	S5X3075-2T
SCREEN SPEC.(m ²)	3000X7200MM
NO. OF LAYERS	2
SCREEN MESH SIZE	2-150MM
FEED SIZE	≤300 MM
DOUBLE AMPLITUDE	7-12 MM
VIBRATING FREQUENCY	800-900 R/M
OVERALL DIMENSION	7419x4909x4298MM
CAPACITY	180-1800T/H
MOTOR	22X2 KW
FRAME	Q345
SIDE PLATE	Q355B
SCREEN MESH	60SIMN
SPRING	RUBBER SPRING

Main Structure



- | | |
|---------------|-------------------------|
| 1. Screen box | 5. Driving Device |
| 2. Spring | 6. Motor |
| 3. Bracket | 7. Transmission Support |
| 4. Vibrator | |


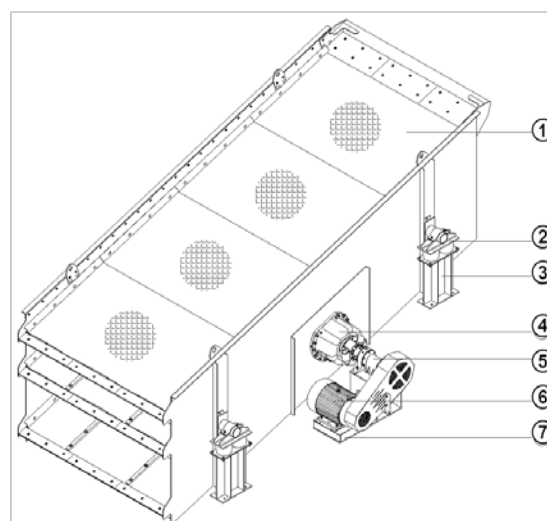


Advantages

1. Bigger capacity and high pressure resistance.
2. Lower operating temperature due to open type oil lubrication.
3. Optional frequency controller for wider applications.
4. Continuous feeding and starting with load.

Technical Features

SV Modular Vibrator	· Overall disassembly design · Longer bearing service life · Super power · Easy stroke adjustment · Grease lubrication system	
Flexible Drive	· Motor drives transmission bearing seat which drives the screen, rather than direct drives the screen, greatly protecting the motor from vibrating harm. · A flexible shaft joint is taken to connect the motor and vibrator, and it makes the screen run smoothly without shaking force from the motor.	
CNC Automatic Laser Cutting	The side plate of S5X screen adopts CNC laser cutting, including all small holes. The cut surfaces are fairly smooth with no seams with better shape and more accurate than drilling on hand drawing.	
High G-force and Good Performance	The advanced design and manufacturing technology brings better performance.	
The Ideal Bearing Load	Each S5X screen is equipped with two sets of SV vibrators and four sets of special bearings, realising bigger load with longer service life.	
Rubber Liners	S5X screen is equipped with feed box and rubber liner to increase the effective screening area and meanwhile take the function of buffering and anti-abrasion.	
Extra Deck Protection with Wear-resistant Steel	To protect the beams, S5X screen are configured with beam protective wrappers, which can protect the hollow beam against material erosion and abrasion to utter-most extent and prolong the service life of the whole screen.	
Modular Design - more efficient, less cost, convenient maintenance	· Modular beam frame realizes more reasonable intensive strength of screen box · Modular vibrator can be installed and replaced as one unit. · The modular tension clamp, pressure strip, and support strip of screen media, etc., can match all the models of S5X screen. · The large space between decks is much convenient for maintenance and replacement of screen media.	



STEEL STRUCTURE

1. Being safe and user-friendly, ZENITH steel structures are designed according to **world-class standards**, and based on our 30 years' experience and customers' feedback.

2. **Finite elements analysis:** more reasonable design of structure and make good use of material, creating good performance and less cost.

3. **Modular design:** quick production, more efficient and convenient connection, assembly, and transportation of steel structures.

4. **Universal parts:** some universal parts of steel structures can be used for different models of equipment, realizing volume production, and shortening manufacturing period. Thus, customers do not have to change the whole steel structures when replacing equipment.

5. **Various directions of outlet belt conveyors :** belt conveyors for discharged materials can be set of various directions making it more flexible for layout arrangement.

6. **Material liners:** Special design of hoppers and chutes to form material liners to protect the steel structures from being worn.

7. **Unified nice appearance:** optimized appearance design, same painting standard with steel structures with additional surface painting. The railings are made yellow colour for safety ensurance.




International Standard:

ISO_14122-4:2010-12, ISO_14122-3:2016

Australian Standard: AS_1657-1992

National Standard: GB4053.3-2009,
GB50040-1996, GB50017-2003, GB50205-2001,
GB50276-98, GB50661-2011


HASCO-standards GBP607,GBP608

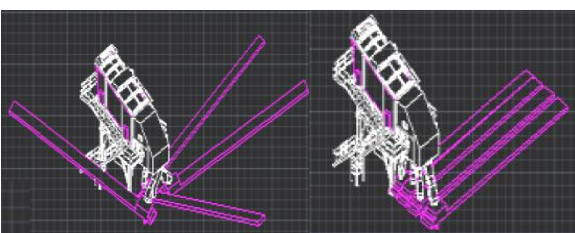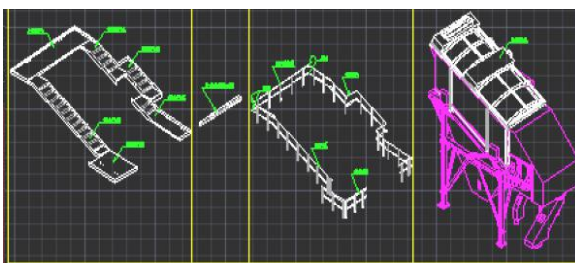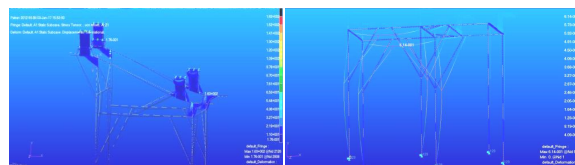

ZENITH Machine



Feeding Wall & Jaw Crusher C6X160(with Concrete foundation & steel connecting)

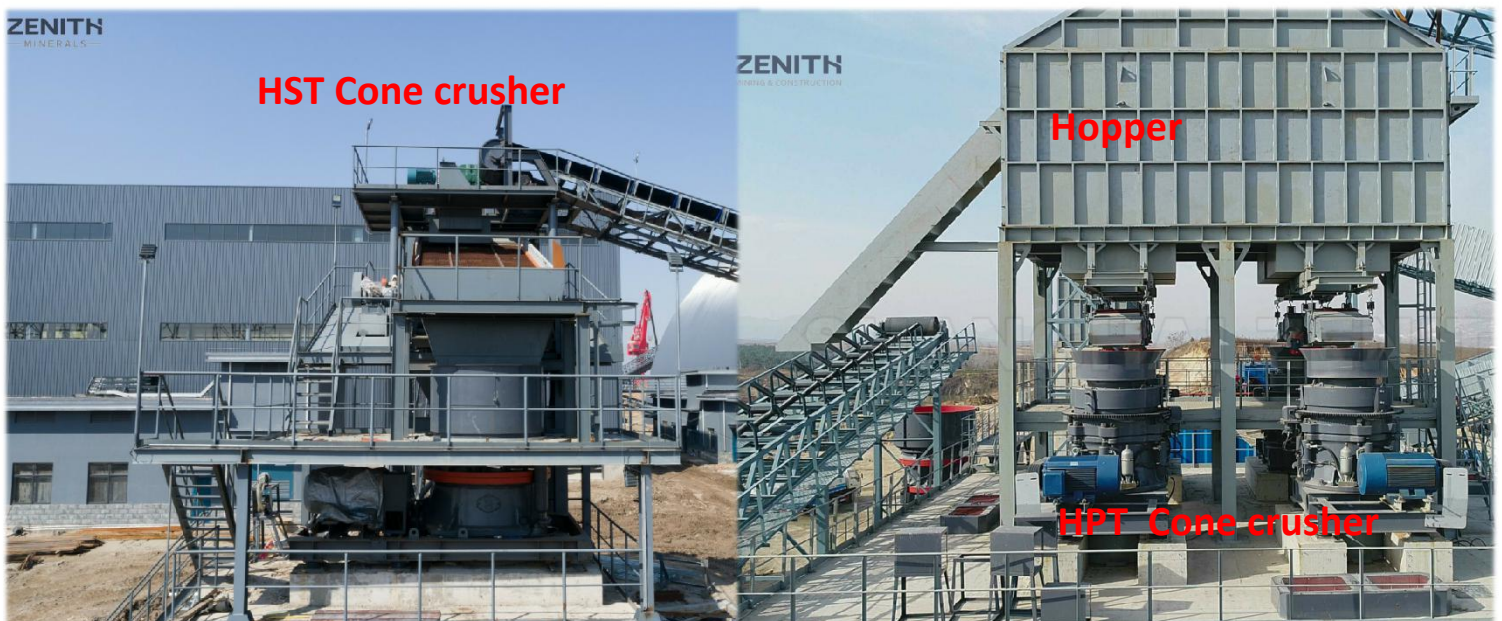

Cone Crusher(Steel Structure With hopper)

ZENITH Machine

CI5X Impact Crusher




S5X Vibrating Screen



Vibrating Screen(With Steel Structure)

ZENITH Machine

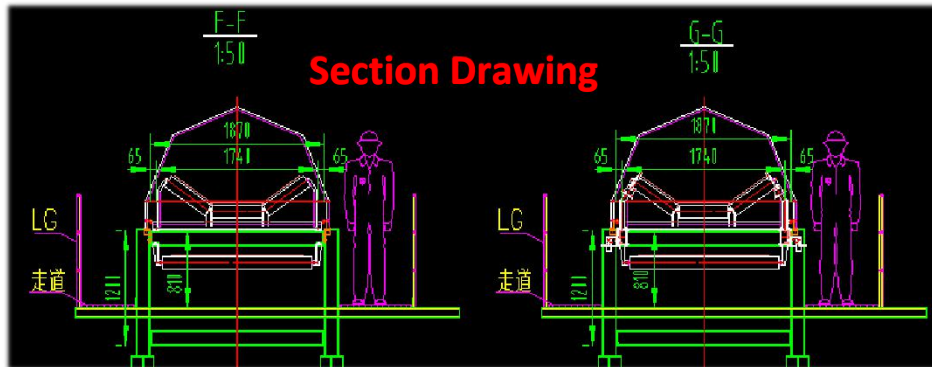

Belt Conveyor(with cover, kick plates and hand rail)



Long distance Belt Conveyor



Operation Control Room



Shanghai Zenith Mineral Co., Ltd.


Add: No.1688 East Gaoke Road, Shanghai, China

Tel: 0086-18301908050 Fax: 0086-21-58385887

E-mail: andy@zenith-crusher.com

Crush Rocks, Build Dreams!

ZENITH Office & Factory

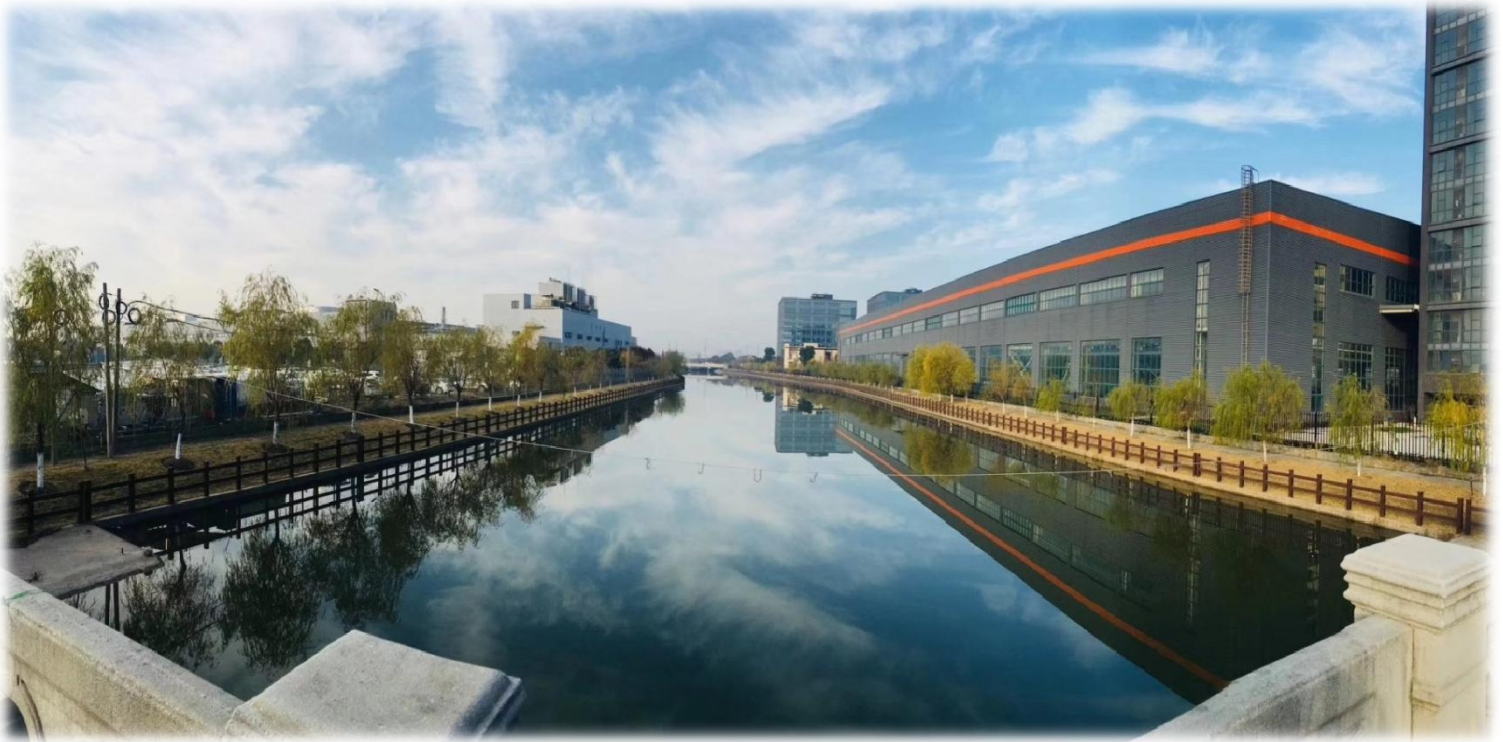

SHANGHAI ZENITH MINERAL Co., Ltd. (www.zenithcrusher.com)

Mobile: +86 18301908050 E-mail:andy@zenith-crusher.com

ZENITH Office & Factory



WHY ZENITH?

“Z”: Zeal ceaseless to be 24 hours responsive to your need.

“E”: EPC project strength to help you all-round in Engineering, Procurement, and Construction.

“N”: Nation-wide scale with 6 workshops making us the biggest crusher manufacturer in China.

“I”: International influence with almost 170 countries' sales coverage and 32 oversea offices.

“T”: Technological improvements to crushing, grinding, and ore beneficiation production lines.

“H”: Historical brand of more than 30 years' influence and centenary vision.



ZENITH IN CHINA

Shanghai ZENITH Mineral Co., Ltd has been one of the biggest manufacturers and top exporter of crushing and grinding equipment in China for 35 years with 160 countries' sales converge, with factory area of 900,000 square meters.

Since 2010, according to the statistics by Chinese Customs Authority, ZENITH group has been the No. 1 China Exporter of crushing and grinding machines. We have thousands of plants running in 170 countries in the world.





A. ZENITH Equipments all over the World.

In the past 35 years, ZENITH has established good business relations with customers from over **170 countries and regions** around the world, exporting over **6800 crushing, grinding and beneficiation plants**. In Middle East market (Saudi Arabia, Oman, U.A.E, Yemen, Iraq, Iran, Qatar...) we have over 100 production lines running there. In North America (Canada, USA), Europe (Greece, Germany, UK, Hungary, Romania), South America (Brazil, Peru, Colombia, Chile...) Middle America, about 168 lines running. In Africa in Nigeria, there have been 85 complete crushing lines running. In Ghana, we have about 28 production lines running. In Kenya, about 50 lines are running. In Congo, Tanzania, Ethiopia... totally 70 production lines are running there. In South Africa, Australia we have sold out more than 26 production lines.

B. ZENITH Branches all over the World.

In order to better guarantee the services and technical support, we've now established 30 branch offices & company all over the world in Switzerland, South Africa, U.A.E, Australia, Saudi Arabia, Nigeria, Kenya, Russia, Mongolia, Indonesia, Philippines, Malaysia, Vietnam, Brazil etc.

.....

C. ZENITH Export amount from 2009-2020 (growth rate 38.8%)

ZENITH group has been the No. 1 China Exporter of crushing and grinding machines. We are so proud to know that our equipment are widely recognized by customers all over the world. We ZENITH are on the way to be one of these top suppliers in the world market and to be the most valuable brand in China mining equipment market.





European CE

China CQC/ISO9001

Nigeria SONCAP

Russia GOST



Strong processing strength:

Shanghai Zenith Mining and Construction Machinery Co., Ltd. practise the strategy of precision manufacturing, global scientific arrangement by taking Asia as hinderland, radiating to the global middle and high-end customers.

So far the group has 6 large-scale production bases covering an area of nearly 1000 acres. It has become the leading company in the industry of crushers and grinding mills.

No.1 Production Base

The group aims to create an international production base which set specialization, information and intelligence as a whole.

Construction area is 71736 m² in total; Main products, including environmental protection equipment, large-scale crushing sand making equipment, precision micro powder equipment etc. which reached international advanced level with high technology content.



No.2 Production Base

Hard power is the guarantee for us to provide high-quality products to customers.

Its construction area is 67000m² in total; it is a high end equipment assembly display base which integrates research, production and administration, showing us all series of sophisticated products and our fine assembly work to customers.

No.3 Production Base

Production is an impetus to our continuous progress.

Its construction area is 20000m² in total. We focus on research and manufacturing crusher, grinding mill and some other mining machines to provide professional technical solutions.





No.4 Production Base

6S management, ERP system and the under construction Bar Code Management make the Production, logistics, quality inspection go on orderly and precisely.

It has standardized workshop with covering are of 30000 m² and become one of the most important large and medium-sized crushing equipment production bases in China. The crusher, sand making machine, refined powder equipment and some related matched equipment are mainly manufactured here.



No.5 Production Base

We will keep upgrading to strengthen our hard power by promoting production team strength and introducing advanced production technology.

Workshop covering area is 20000m² in total. It has international standard machine manufacturing technology. Series of highly standard production equipment, production capacity and technological level and equipment strength has ranked the leading position in the industry.



No.6 Production Base

Each production base is high-efficient production manufactory built by international standards.

This production base is another high-end production base, covering an area of 280000 m², which was built in 2015. The total investment of engineering is 15.7 billion yuan.

On behalf of Chinese high-end mining equipped with the most advanced research and development, innovation and creative powder. It is the global production base and R & D Center of automation, digitization and low energy consumption.

