



NetView Technologies (Shenzhen) Co., Ltd

ADD : A501-502, Academy of Aerospace Technology, 10th Kejinan Road, Nanshan District, Shenzhen, China


TEL:+86 755 86227838

FAX:+86 755 86607322

Website: www.netviewtech.com

Contact: grace.zeng@netviewtech.com

SPECIFICATION

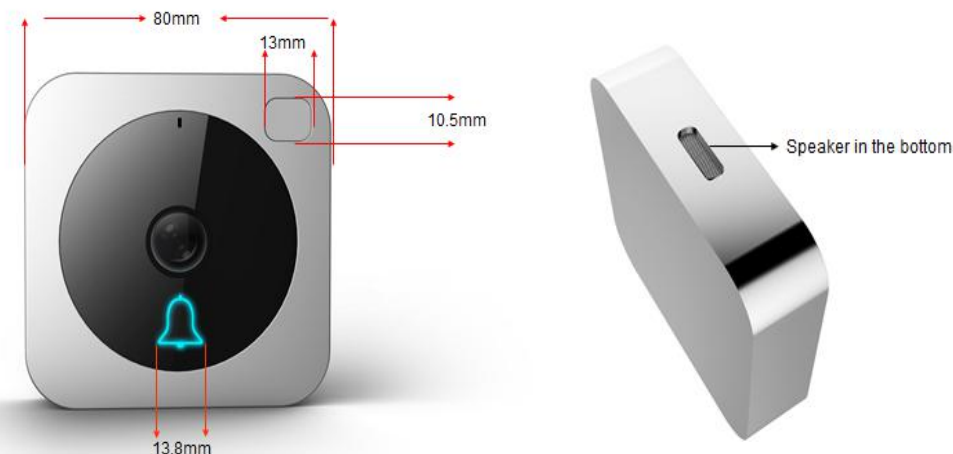

AGC: Automatic

White Balance: Automatic

Resolution: HD: 1280 * 720; BALANCED: 640 * 360; SMOOTH: 320 * 180; AUTO

Focus: f = 1.3mm F/N = 2.5

Minimum Illumination: 4Lux@F2.5(Color mode), 2Lux@F2.0(Black mode)

PIR Distance: 3 meters

IR LED: 8 IR LEDs; Infrared distance 5 meters

Field of View: 185° horizontal, 120° vertical

Digital zoom: Max 8x

Audio: Full duplex audio, build-in loudspeaker and pickup

Video Streaming: Output up to 30 frames/sec, Max Bit Rate 2Mbps

User Administration: By password

Network Protocol: Support TCP/IP, UDP, DNS Client, SNTP, DHCP, SNMP

Power specification: AC 8-24V, DC 9-36V

WiFi Protocol: WiFi/802. 11b/g/n

WiFi Distance: Outdoor<=100m,indoor<=50m(Open-sided place without interference.Dependent on the environment.)

Network Bandwidth: DHCP on router, Uplink bandwidth $\geq 512K$, Downlink bandwidth $\geq 2M$, Wireless bandwidth $\geq 54M$

Operating System: Embedded Linux

Mobile phone system requirement: iOS : 7.0+ android: 4.2+

Waterproof level: IP53

Working Temperature: -20°C ~ +50°C

Working Humidity $\leq 95\%$ non condensing

Other function: The unlock function is available