

Detection of Vinyl Chloride in environmental water samples

By: Philip Oliver Mejer Jørgensen



Supervisors:

Main supervisor: Associate Professor Roana de Oliveira Hansen

University of Southern Denmark (SDU)

Faculty of Engineering - Mechatronics

Sønderborg, Denmark

January 2024

Thesis submitted

as a part of the

Bachelor of Engineering in Mechatronics

Abstract

Abstract. write toward the end

List of Figures

1	Applications for PVC plastic[2]	8
---	---------------------------------	---

Abbreviations

VOC	Volatile Organic Compound
VC	Vinyl Chloride
PVC	Polyvinyl Chloride

Contents

Abstract	2
Abbreviations	2
Project Formulation	4
1 Introduction	8
1.1 Background	8
2 Theory	9
2.1 What is <i>Refractive index</i> ?	9
2.2 The photonic crystals, a tool for measuring the refractive index . .	9
3 Building a database	10
3.1 Measuring vinyl chloride in a sample	10
3.1.1 General methodology	10
3.1.2 Measuring using the Water Care Guard suitcase	10
3.1.3 Measuring using the Shimadzu UV-1900 spectrophotometer	10
3.2 Problems	10
3.3 Data analysis	10
4 User interface	11
4.1 API Interface	11
4.2 Graphical User Interface	11
5 Conclusion	12
6 Appendix	13

Detection of Vinyl Chloride in environmental water samples

Project Formulation
Philip Oliver Mejer Jørgensen

Fall 2023

Background

Humans produce waste, whether that is as an individual or on an industrial level. A lot of the waste that is being produced, end up in our water supply contaminating it. An example of a toxic waste product that can end up in the water supply is vinyl chloride (*VC*), one of the primary areas VC is found is in the production of PVC. PVC plastic is used as pipes for plumbing, bottles, and more[3]. Vinyl chloride is a highly volatile compound which makes it both hard to detect, and making it more dangerous. This has created a need for a fast and simple solution for detecting the concentration of vinyl chloride in water samples.

This has led the company Water Care Guard (*WCG*) to develop an on-site lab kit that fits in a suitcase, which is able to test a water sample for the concentration of vinyl chloride amongst other substances.

This project is done in collaboration with Roana from SDU Nano Syd and Water Care Guard.

Problem

As it stands at the moment, when you want to detect vinyl chloride in water samples you use a method of analysis called "*Gas chromatographic (GC) analysis*"[2]. Gas chromatographic analysis is an analysis method in which the sample is being heated to the point of each component in the sample is being vaporized, where it then enters a column where the different components are being separated, such that it can be detected.[4] The process of sending a water sample to a laboratory and getting the measurements made, is time-consuming and expensive. It can take up to two weeks to get a water sample analyzed in

a laboratory.[5] The solution with Water Care Guard, aims to reduce this time, by creating an onsite *laboratory kit*, where you can test the water sample. It is using the fact that the refractive index of the solution with added enzyme is dependent on the concentration of vinyl chloride in the solution. The refractive index can be determined using a spectrophotometer and a cuvette with a photonic crystal applied to one side.[1]

The main part of the project is going to be about building a database for different vinyl chloride concentrations and the refractive index shift for the corresponding vinyl chloride concentration. In addition, the data from the database should be analyzed to be able to get a prediction for the concentration of vinyl chloride in the solution based on the sample given.

The second part of the project is building a simplified user interface for the suitcase, which could be installed on a tablet in the suitcase or another display that the user can interact with. It could even be used on the smartphone of the user, or something else. This could be accomplished by making a dedicated app, or by having a website that is hosted on a computer in the suitcase, this would allow the user to access the user interface from either a tablet in the suitcase or from their computer or smartphone.

Timetable and milestones

The project is divided into 3 main parts:

- Building the database
- Analyzing the data
- User interface

The different parts are going to overlap, but it is primarily going to be in the order of the first part is focusing on building the database then about finding a way to analyze the data, and lastly building the user interface.

The project is divided up with the intention of spending 8 hours per day, 5 days a week on the project i.e. 40 hours a week.

Gantt chart

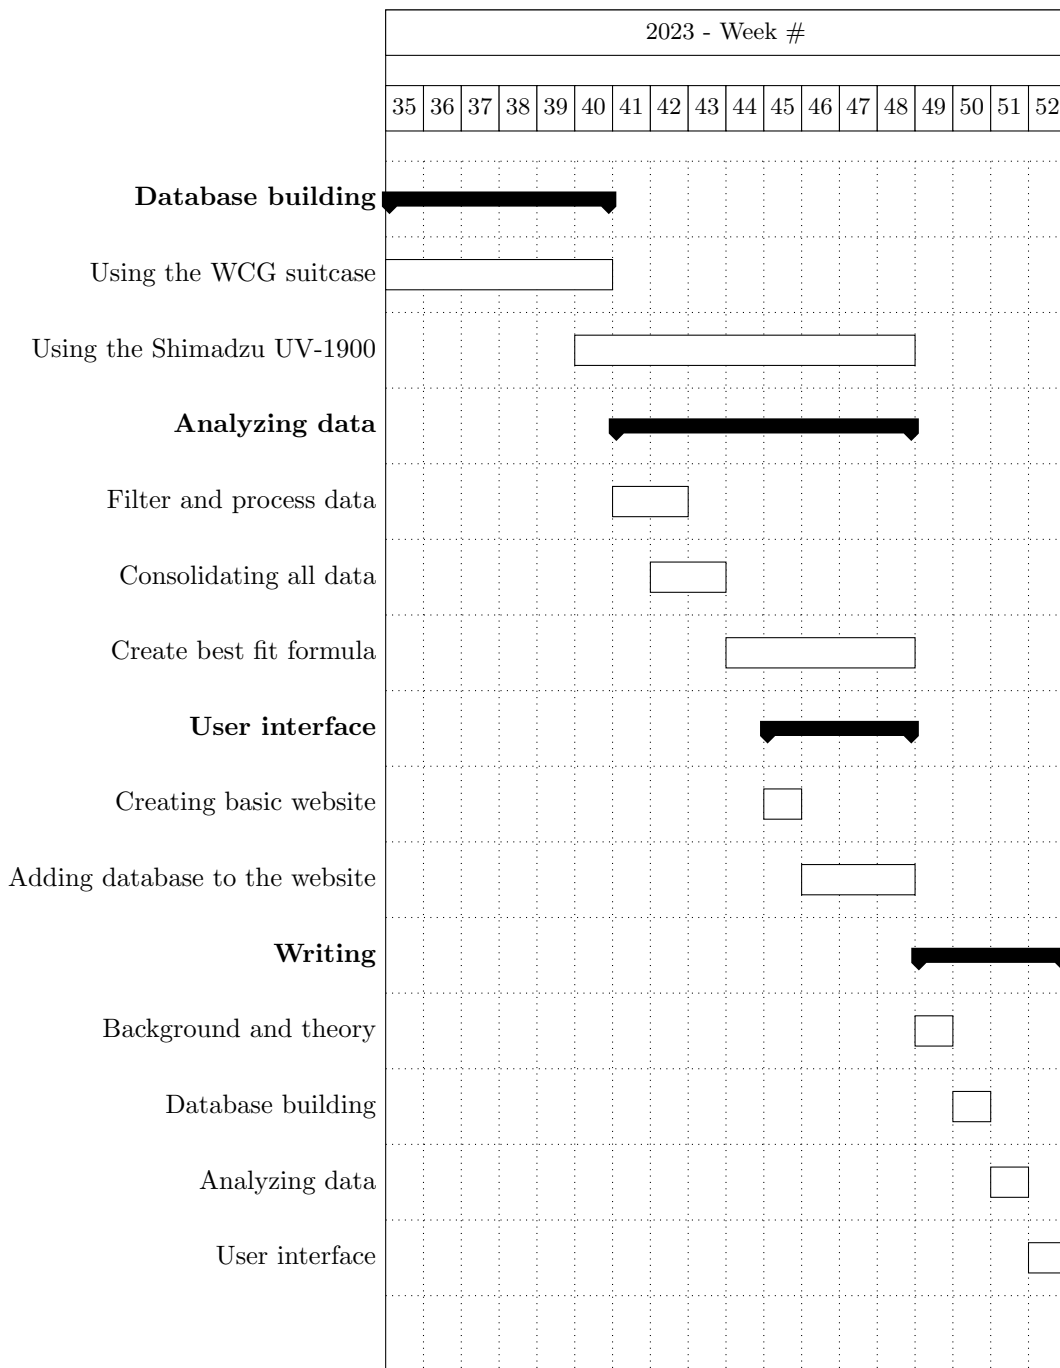


Figure 1: The timetable in a Gantt chart format, divided up in weeks

Risk assessment

The primary risk associated with the project is regards to dealing with the chemicals in making the measurements.

Issue	Who is involved	Impact/Probability	Mitigative actions
High volatility and toxicity of Vinyl Chloride. Working with the chemicals	Operator performing the measurements	High/High	Using: <ul style="list-style-type: none">- labcoat- safety glasses- working in a fume hood

Table 1: The risk assessment table

References

- [1] Pétur Gordon Hermannsson et al. “Refractive index dispersion sensing using an array of photonic crystal resonant reflectors”. In: *Applied Physics Letters* 107.6 (2015).
- [2] Dr J. Kielhorn. *Vinyl Chloride in Drinking-water*. Tech. rep. WHO, 2004. URL: https://cdn.who.int/media/docs/default-source/wash-documents/wash-chemicals/vinylchloride.pdf?sfvrsn=8e19c6cd_4.
- [3] Omnexus. “Key Areas of Applications of PVC Resin”. In: (). URL: <https://omnexus.specialchem.com/selection-guide/polyvinyl-chloride-pvc-plastic/key-applications>.
- [4] Shimadzu. *What is Gas Chromatography?* URL: <https://www.ssi.shimadzu.com/service-support/faq/gas-chromatography/what-is-gas-chromatography/index.html>.
- [5] Clean water testing. *Frequently Asked Questions*. URL: <https://www.cleanwatertesting.com/resources/water-testing-faqs/>.

1 Introduction

1.1 Background

Humans have been producing waste for a long time, but as the materials that we use change so has our waste. In the early 20th century with the invention of fully synthetic plastic by the Belgian chemist Leo Baekeland in 1907[5], started a new type of anthropogenic pollution. One type of plastic known as Polyvinyl Chloride (PVC), which was first synthesized in 1872 by Dr. Eugen Baumann[1], it was first plastasized by Dr. Waldo L. Semon in 1926[6]. The introduction of plastics and especially PVC plastics, has introduced a new biproduct which is a highly toxic volatile organic compound (VOC), called Vinyl Chloride (VC). Vinyl chloride is a biproduct in the production of PVC plastics, from it being used as the main component in the production of PVC plastics. PVC plastics are used in a lot of different areas like construction piping, packaging, wires, toys, etc. in figure 1 some examples of PVC applications are shown.



Figure 1: Applications for PVC plastic[2]

People can be exposed to vinyl chloride in different ways, through inhaling contaminated air, contaminated water etc. If vinyl chloride contaminate a water supply to a household, it can contaminate the air in the household leading to the inhabitants being exposed to vinyl chloride. [3] One of the main dangers with

exposure to vinyl chloride is the increased risk of cancer, and in particular liver cancer.[3] In addition according to "*kemibrug.dk*"¹, vinyl chloride can also affect the central nervous system with symptoms like headache, dizziness, nausea and a possibility of loss of consciousness, as well as the inhalation the chemical is also easily absorbed through the skin which can lead to similar effects as of those from inhalation.[4]

At the moment the primary way to analyze whether there is vinyl chloride present in a water sample is through gas chromatography test

2 Theory

2.1 What is *Refractive index*?

2.2 The photonic crystals, a tool for measuring the refractive index

¹A database for information regarding chemicals

3 Building a database

3.1 Measuring vinyl chloride in a sample

3.1.1 General methodology

3.1.2 Measuring using the Water Care Guard suitcase

3.1.3 Measuring using the Shimadzu UV-1900 spectrophotometer

3.2 Problems

3.3 Data analysis

4 User interface

4.1 API Interface

4.2 Graphical User Interface

5 Conclusion

References

- [1] Dr. Eugen Baumann. “Ueber einige Vinylverbindungen”. In: (1872), pp. 308–322. URL: https://books.google.dk/books?id=HNXyAAAAMAAJ&pg=PA308&redir_esc=y#v=onepage&q&f=false (visited on 12/29/2023).
- [2] Europlas. *What is PVC Plastic? All Information About PVC Plastic*. URL: <https://europlas.com.vn/en-US/blog-1/what-is-pvc-plastic-all-information-about-pvc-plastic> (visited on 12/29/2023).
- [3] National Cancer Institute. *Vinyl Chloride*. (Visited on 12/29/2023).
- [4] Kemibrug. *75-01-4 Vinyl chloride (stabilized)*. 2020. URL: <https://kemibrug.dk> (visited on 12/29/2023).
- [5] Science Museum. *The Age of Plastic: From Parkesine to pollution*. 2019. URL: <https://www.sciencemuseum.org.uk/objects-and-stories/chemistry/age-plastic-parkesine-pollution> (visited on 12/29/2023).
- [6] Waldo L. Semon and G. Allan Stahl. “History of Vinyl Chloride Polymers”. In: *Journal of Macromolecular Science: Part A - Chemistry* 15.6 (1981), pp. 1263–1278. DOI: 10.1080/00222338108066464. eprint: <https://doi.org/10.1080/00222338108066464>. URL: <https://doi.org/10.1080/00222338108066464>.

6 Appendix