



Accepting first-ever pin

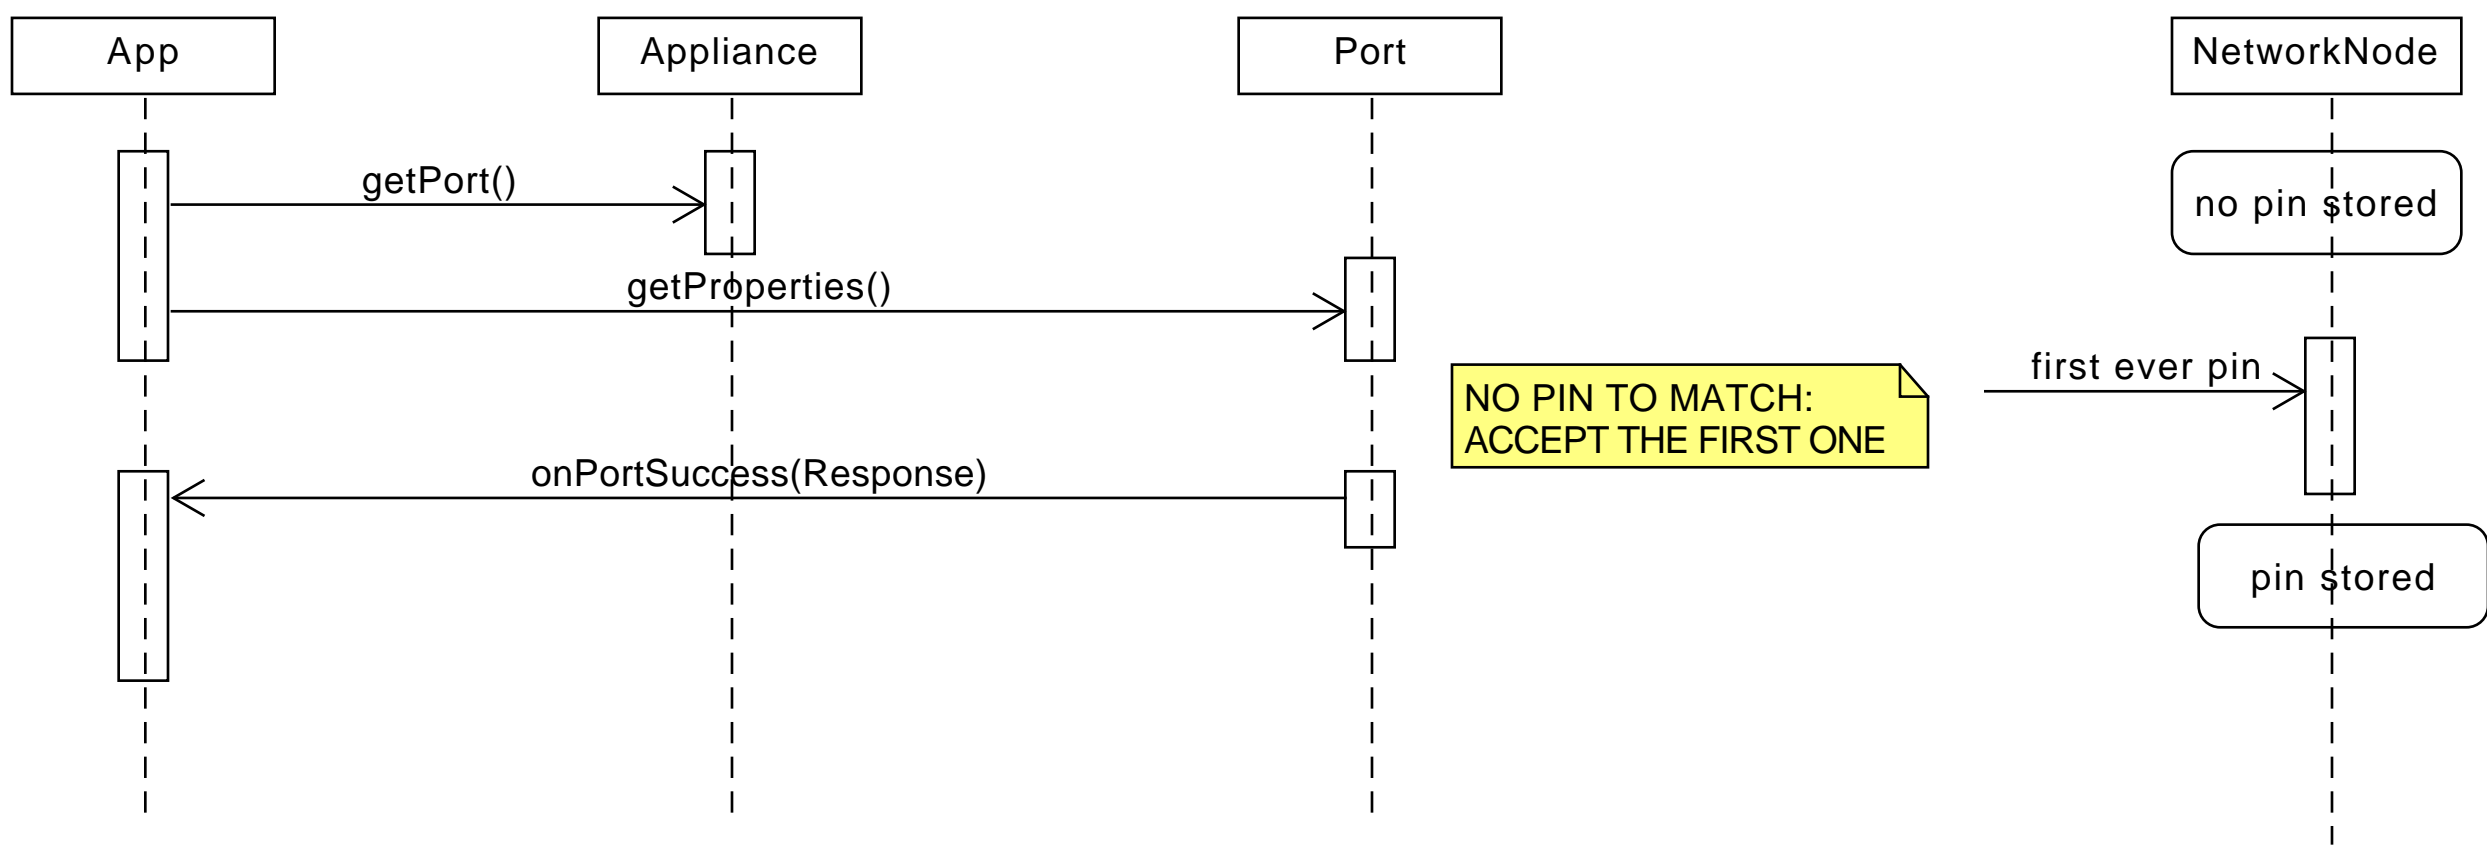

The methods to deal with pin mismatch situation are put on LanTransportContext to keep the Appliance's interface generic.

Mismatching pin - Reject new pin

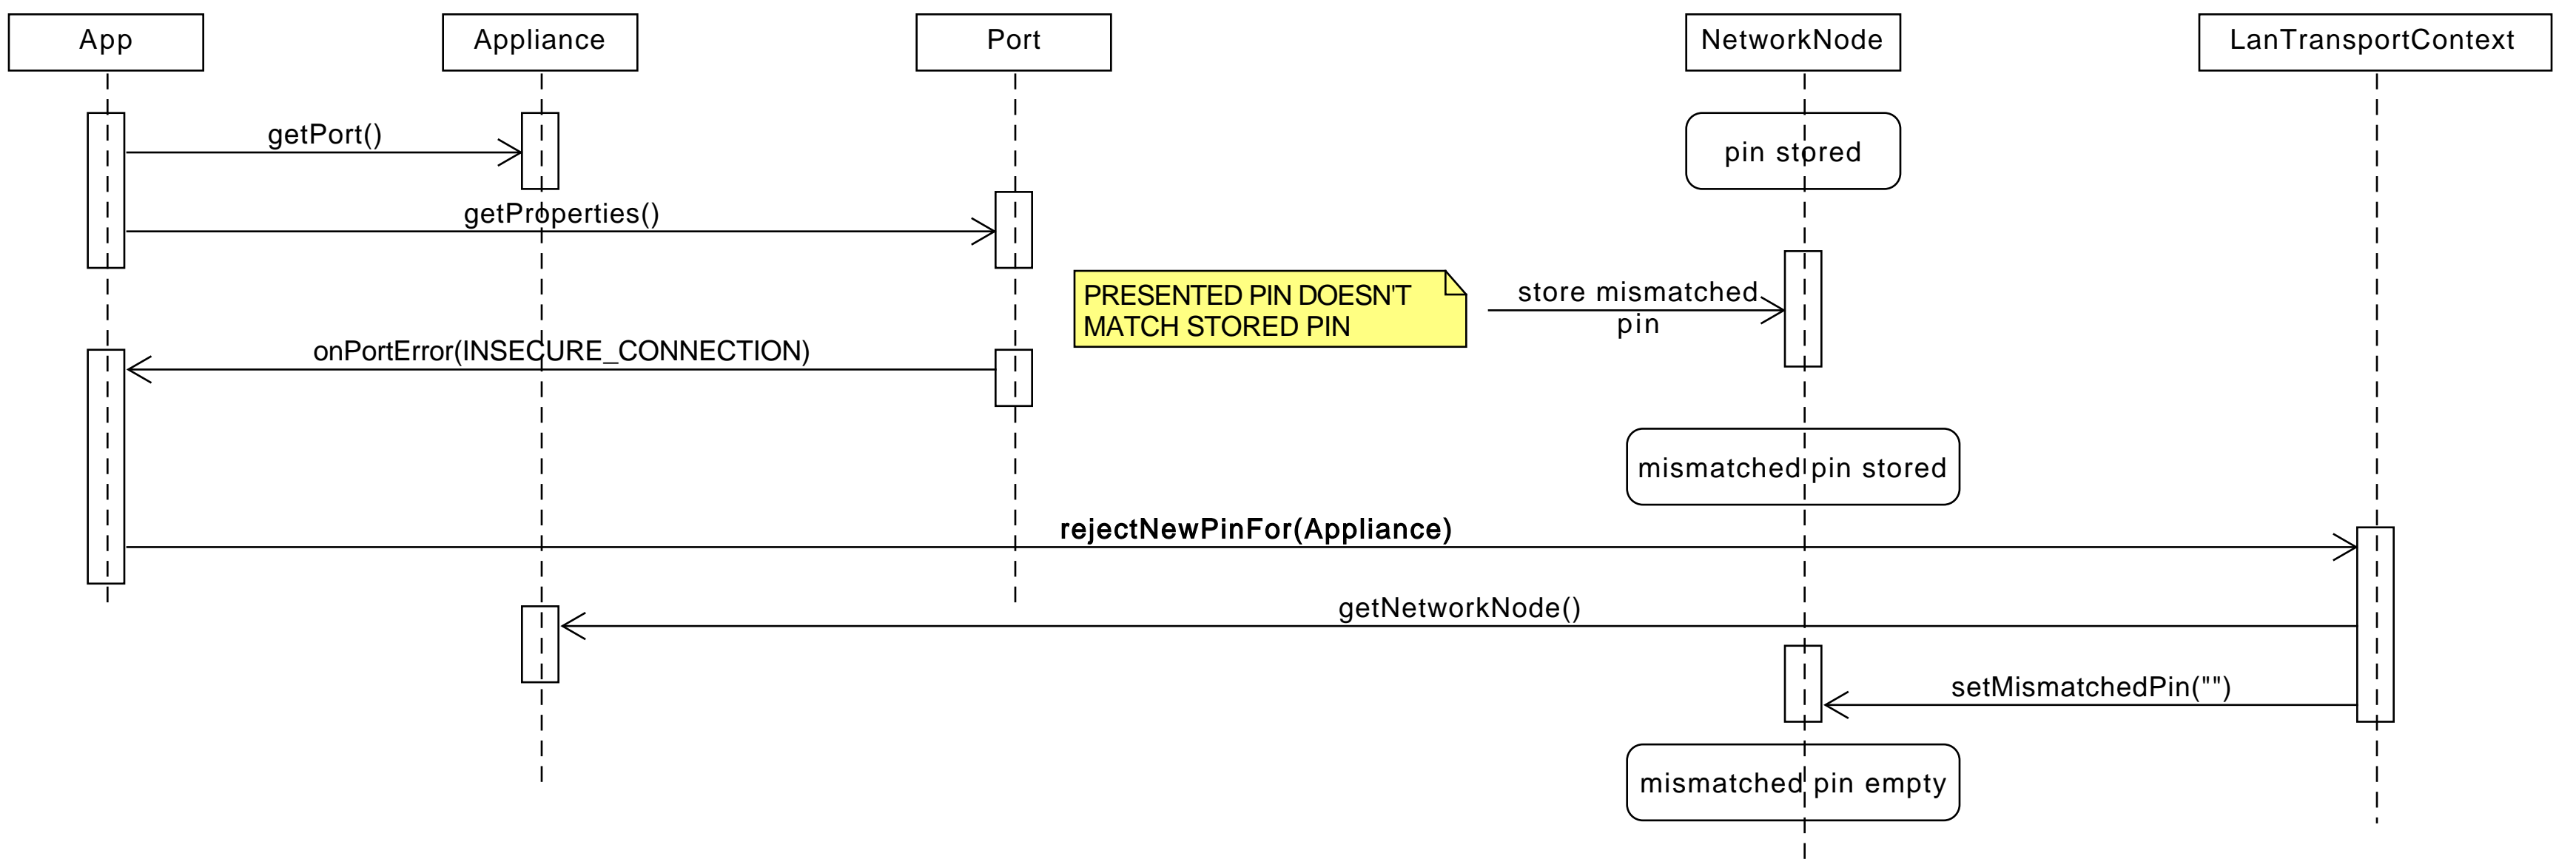

Mismatching pin - Accept new pin

