LOWARA
a xylem brand

e-XC300-705/2500W/L65BDS4AG

Technical data

Company name
Contact
Phone number
e-mail address

Operating data

1	Pumpe type		Single head pump	Fluid			Water, pure
2	No. of pumps		1	Operating temperature t A		°C	4
3	Nominal flow	m³/h	1125	Max / Min Operating Temperature		°C	/
4	Nominal head	m	50	pH-value at t A			7
5	Static head	m	24.21	Density at t A		kg/m³	1000
6	Inlet pressure	kPa	0	Kin. viscosity at t A		mm²/s	1.569
7	Environmental temperature	°C	20	Vapor pressure at t A		kPa	100
8	Available system NPSH	m	0	Altitude			0

Pump data

9	Lubrication	Grease Lubricated [STD]					
10	Execution	Clockwise Rotation - viewed from motor end [STD]		Impeller Ø	Max.	mm	720
11	Design	Double Suction Split Case Pumps			designed	mm	630
12	Operating speed	992 rpm			Min.	mm	480
13	Suction nozzle	DN 400 / PN16 / EN 1092-2 [1)]		Flow	Nominal	m³/h	1182.3
14	Discharge nozzle	DN 300 / PN16 / EN 1092-2 [1)]			Max-	m³/h	1497.2
15	Max. casing pressure	kPa	3100		Min-	m³/h	392.3
16	Max. working pressure	kPa	632.1	Head	Nominal	m	52.7
17	Impeller type		Radial impeller		at Qmax	m	44.9
18	Head H(Q=0)	m	64		at Qmin	m	63.9
19	Max. shaft power	kW	228.5	Shaft power		kW	201.8
20	Pump weight	kg		Efficiency		%	84.2
21	Total weight	kg	4,221.6	NPSH 3%		m	3.4

Materials

22	Pump		Shaft Seal	
23	Casings	[D] - EN-GJS-500-7 / QT500-7 / ASTM A536, 80-55-06	Rubber below seal	
24	Impeller + Impeller Wear Ring	[S] - 304 SS - 1.4308 / ZG0Cr18Ni9 / ASTM - CF8	MG12 - Seal on shaft	4
25	Shaft Construction	Dry (sleeves) [STD]	Mechanical seal diameter	120 mm
26	Shaft	1.7035 / 40Cr / AISI - 5140	Rotating ring	Carbon [STD]
27	Shaft Sleeves	304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304	Stationary ring	Silicon Carbide
28	Shaft Sleeve Nuts	304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304	Elastomers	EPDM [STD]
29	Casing Wear Ring	Bronze - CuSn8Zn4 / ASTM - C90300	Springs	316 SS - 1.4408 / 316 / CF8M
30	Lantern Ring	Cast Iron	Other metal parts	316 SS - 1.4408 / 316 / CF8M
31	Seal flush lines	304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304	Material code	Carbon-SiC-EPDM [STD]
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				

Motor data
Electrical and dimensional data refer to IE3 motor

42	Manufacturer	Lowara		
43	Specific design	IE3 3ph Surface Motor - Premium Efficiency		
44	Type	3MGS 355 M B3 250 kW		
45	Rated power	250 kW	Rated current	448.4 A
46	Nominal speed	992 rpm	Rated voltage	400 V
47	Frame size	355 M	Service factor	1
48	Weight kg	1,675.0	Degree of protection	IP55
49	Length shaft end	210 mm	Design acc. standard	IEC

Coupling

Manufacturer	Flender			
Series	N-EUPEX - Type A			
Spacer length 4 mm	Suitable for EEx-design			NO
Shaft diameter	Motor	100 mm	Frame size	250
	Pump	95 mm	Weight	70.5 kg
Coupling protection	CG-05			
	Material	1.0038 RAL 2000 painted		
	Weight	26 kg		

Base plate

50	Name		FRAME XC29-982-354
51	Weight	kg	500.0
52			

Remarks

1) Flange in Flat Face (FF) execution not according to EN1092-2 (Face Form A), only drilling according Standard EN1092-2

Project	Xylect-21454176	Created by	Last update 11/17/2023
Block	e-XC300-705/2500W/L65BDS4AG	Created on 11/17/2023	

LOWARA
a xylem brand

e-XC300-705/2500W/L65BDS4AG

Performance curve

Company name
Contact
Phone number
e-mail address

	Ø	Pump capacity Operating range Min.	Max.	η Max.	Pump head H(Q=0)	η Max.	Shaft power P2 P2(Q=0)	Max.	η Max.
	inch	m³/h	m³/h	m³/h	m	m	kW	kW	kW
actual	630	392	1500	1170	64.4	52.9		228	201
Min.	480	/	/	970	37.2	28.6		/	94.2
Max.	720	/	/	1330	83.9	70.1		/	305

Frequency	Hz	50
Operating speed	rpm	992
Nominal flow	m³/h	1125
Nominal head	m	50
Inlet pressure	kPa	0
Static head	m	24.21

Power datas refered to:

Water, pure [100%] ; 4°C; 1000kg/m³; 1.57mm²/s

hydr. Performance acceptance acc. To EN ISO 9906 Class **Grade 2B**

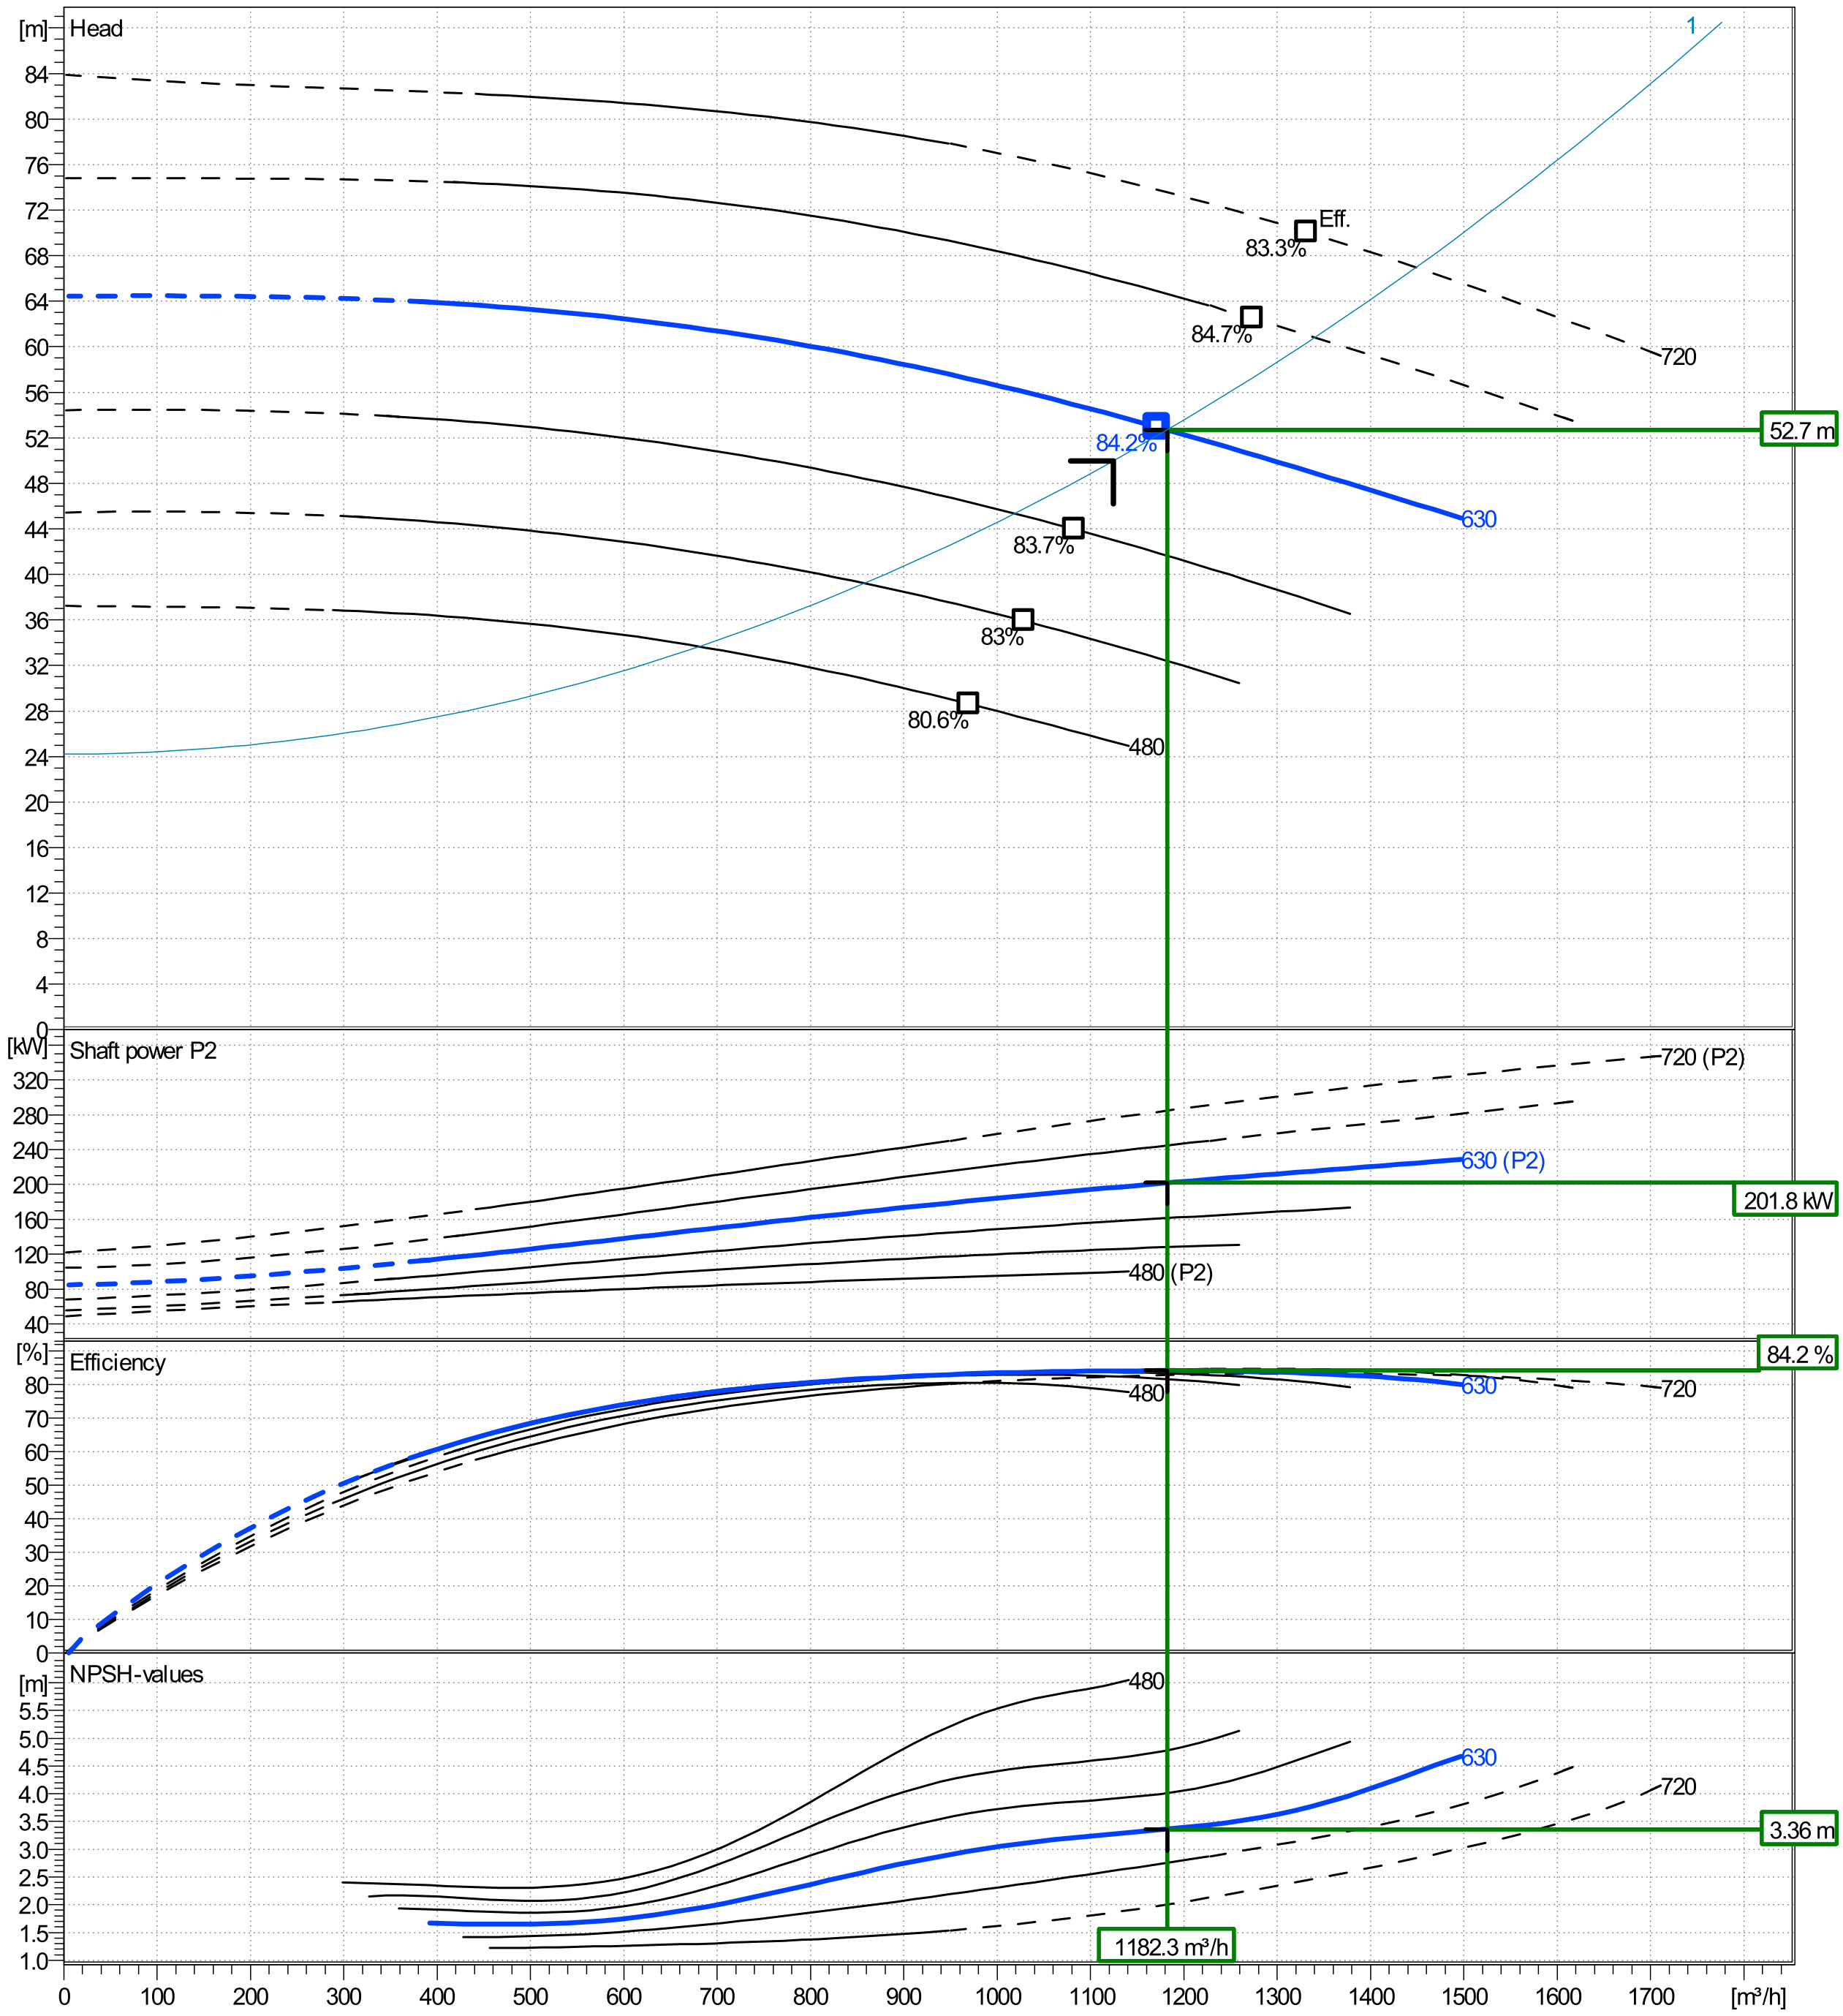

Project	Xylect-21454176	**Created by**		**Last update**	11/17/2023
Block	e-XC300-705/2500W/L65BDS4AG	**Created on**	11/17/2023		Page 2 / 3

Program version	Data version	User group(s)
69.0 - 15/05/2023 (Build 33)	13/11/2023 14:32	Xylem: United Kingdom - EXT

LOWARA a xylem brand

e-XC300-705/2500W/L65BDS4AG

Dimensions

Company name	
Contact	
Phone number	
e-mail address	

Complete Unit with Baseplate
Clockwise Rotation - viewed from motor end [STD]
IE3 3ph Surface Motor - Premium Efficiency
3MGS 355 M B3 250 kW

Electrical and dimensional data refer to IE3 motor

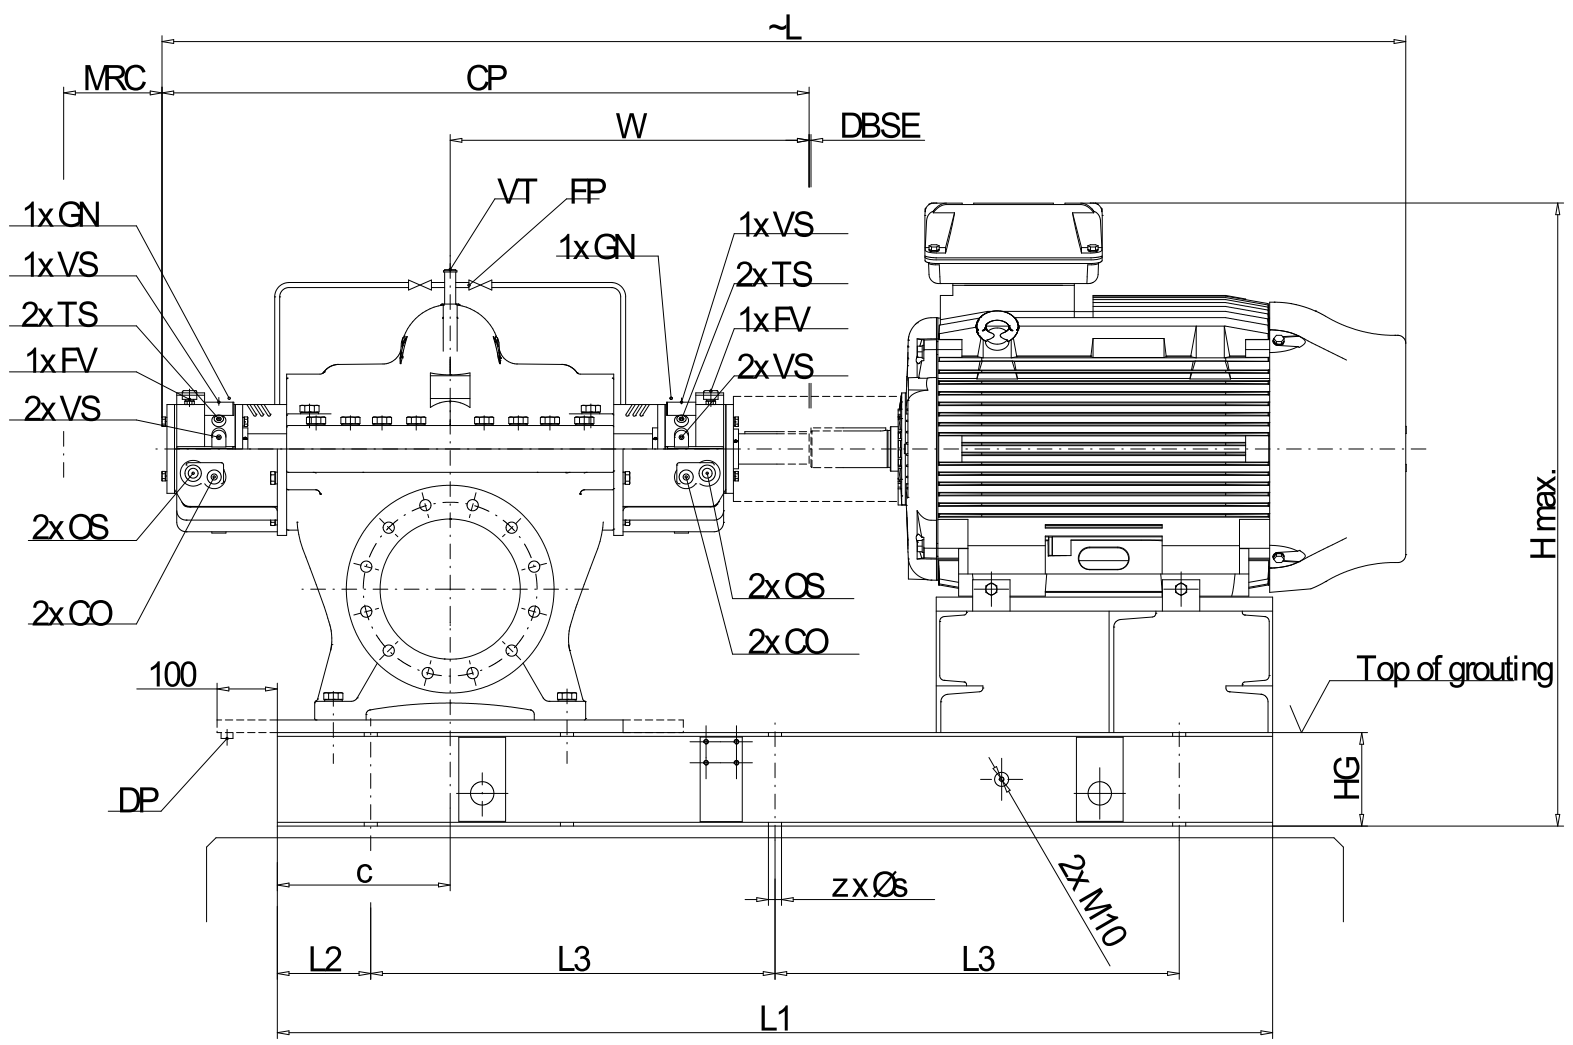

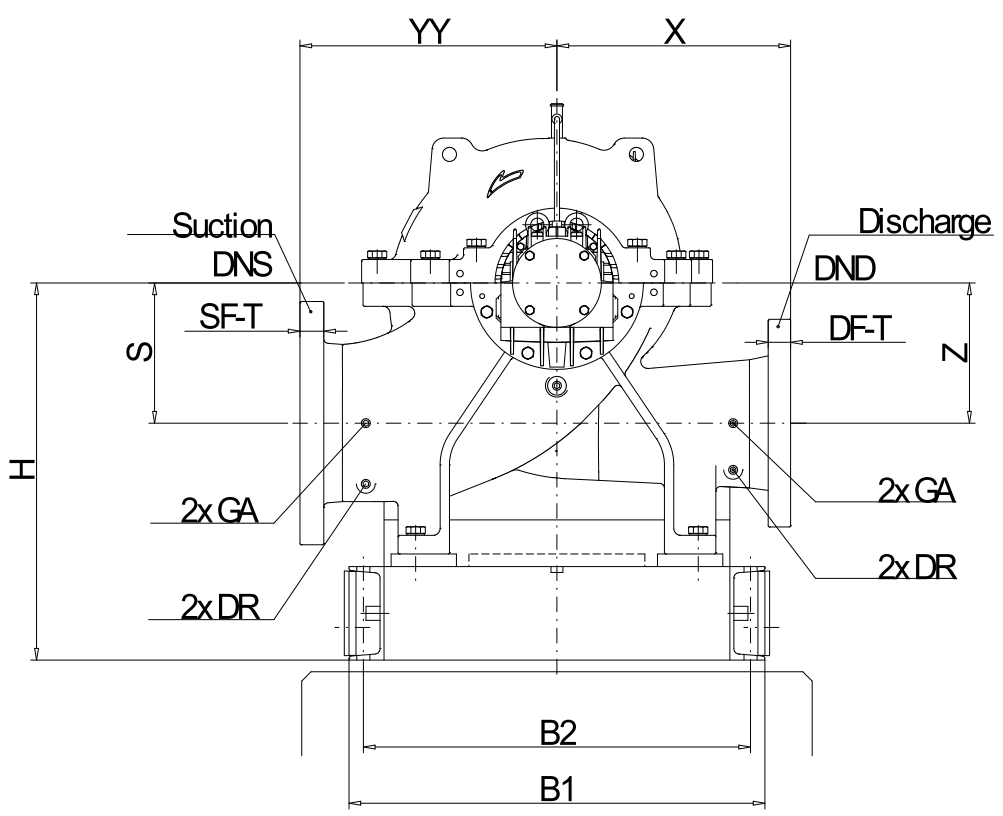

DR ... Drain Rp1/2
FP ... Flush Rp3/8
FV ... Fill/Vent Cup Rp3/8 standard
GA ... Gauge Connection Rp1/2
GN ... Grease Nipple M10x1 standard
TS ... Temperature Sensor M10x1
VT ... Vent Rp1/2
VS ..

Rotation: CW View from Motor to Pump

MRC .... Minimum removal clearance for bearing and seal maintenance
DBSE ... Distance between shaft ends



Dimensions	[mm]		
B1	1160	SF-ND	400
B2	1090	SF-OD	580
c	410	W	898
CP	1615	X	650
DBSE	4	YY	800
DF-BC	410	Z	400
DF-HH	28	z	8x
DF-HQ	12x		
DF-ND	300		
DF-OD	460		
H Max.	1508		
H	982		
H1	750		
HD1	750		
HG	200		
L	3084		
L1	2600		
L2	250		
L3	700		
MRC	4.5		
s	29		
S	400		
SF-BC	525		
SF-HH	31		
SF-HQ	16x		

Connections	
Suction nozzle	Discharge nozzle
DN 400	DN 300
PN16	PN16
EN 1092-2 1)	EN 1092-2 1)

Weight	(+/- 5%)
Pump	1,950 kg
Coupling	71 kg
Coupling guard	26 kg
Base plate	500 kg
Motor	1,675 kg
Total weight	4,222 kg

Dimensions and weight without obligation

1) Flange in Flat Face (FF) execution not according to EN1092-2 (Face Form A), only drilling according Standard EN1092-2

Project	Project ID	Created by	Created on	Last update
	Xylect-21454176		11-17-23	11-17-23