

## e-XC250-730/5000W/W45BDS4AG

### Technical data

Company name  
Contact  
Phone number  
e-mail address

#### Operating data

|   |                           |                  |                                 |             |
|---|---------------------------|------------------|---------------------------------|-------------|
| 1 | Pumpe type                | Single head pump | Fluid                           | Water, pure |
| 2 | No. of pumps              | 1                | Operating temperature t A       | °C 4        |
| 3 | Nominal flow              | m³/h 1125        | Max / Min Operating Temperature | °C /        |
| 4 | Nominal head              | m 100            | pH-value at t A                 | 7           |
| 5 | Static head               | m 44.88          | Density at t A                  | kg/dm³ 1    |
| 6 | Inlet pressure            | bar 0            | Kin. viscosity at t A           | mm²/s 1.569 |
| 7 | Environmental temperature | °C 20            | Vapor pressure at t A           | bar 1       |
| 8 | Available system NPSH     | m 0              | Altitude                        | 0           |

#### Pump data

|    |                       |                                                  |             |             |
|----|-----------------------|--------------------------------------------------|-------------|-------------|
| 9  | Lubrication           | Grease Lubricated [STD]                          |             |             |
| 10 | Execution             | Clockwise Rotation - viewed from motor end [STD] | Max.        | mm 730      |
| 11 | Design                | Double Suction Split Case Pumps                  | designed    | mm 584      |
| 12 | Operating speed       | 1492 1/min                                       | Min.        | mm 480      |
| 13 | Suction nozzle        | DN 300 / PN16 / EN 1092-2 1)                     | Nominal     | m³/h 1214.8 |
| 14 | Discharge nozzle      | DN 250 / PN16 / EN 1092-2 1)                     | Max-        | m³/h 1347.3 |
| 15 | Max. casing pressure  | bar 27.6                                         | Min-        | m³/h 393.8  |
| 16 | Max. working pressure | bar 13                                           | Nominal     | m 109.2     |
| 17 | Impeller type         | Radial impeller                                  | at Qmax     | m 100.3     |
| 18 | Head H(Q=0)           | m 130                                            | at Qmin     | m 130.5     |
| 19 | Max. shaft power      | kW 471.4                                         | Shaft power | kW 444.6    |
| 20 | Pump weight           | kg                                               | Efficiency  | % 81.3      |
| 21 | Total weight          | kg 4,596.6                                       | NPSH 3%     | m 7.3       |

#### Materials

|    |                               |                                                    |                          |                                             |
|----|-------------------------------|----------------------------------------------------|--------------------------|---------------------------------------------|
| 22 |                               | Pump                                               |                          | Shaft Seal                                  |
| 23 | Casings                       | [D] - EN-GJS-500-7 / QT500-7 / ASTM A536, 80-55-06 |                          | Rubber below seal [STD]                     |
| 24 | Impeller + Impeller Wear Ring | [S] - 304 SS - 1.4308 / ZG0Cr18Ni9 / ASTM - CF8    | MR2 - Seal on sleeve     | 4                                           |
| 25 | Shaft Construction            | Dry (sleeves) [STD]                                | Mechanical seal diameter | 110 mm                                      |
| 26 | Shaft                         | 1.7035 / 40Cr / AISI - 5140                        | Seal faces               | Carbon [STD]                                |
| 27 | Shaft Sleeves                 | 304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304            | Stationary ring          | Silicon Carbide                             |
| 28 | Shaft Sleeve Nuts             | 304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304            | Elastomers               | EPDM [STD]                                  |
| 29 | Casing Wear Ring              | Bronze - CuSn8Zn4 / ASTM - C90300                  | Springs                  | 316 SS - 1.4401 / 0Cr17Ni12Mo2 / AISI - 316 |
| 30 | Lantern Ring                  | Cast Iron                                          | Other metal parts        | 316 SS - 1.4401 / 0Cr17Ni12Mo2 / AISI - 316 |
| 31 | Seal flush lines              | 304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304            | Material code            | Carbon-SiC-EPDM [STD]                       |
| 32 |                               |                                                    |                          |                                             |
| 33 |                               |                                                    |                          |                                             |
| 34 |                               |                                                    |                          |                                             |
| 35 |                               |                                                    |                          |                                             |
| 36 |                               |                                                    |                          |                                             |
| 37 |                               |                                                    |                          |                                             |
| 38 |                               |                                                    |                          |                                             |
| 39 |                               |                                                    |                          |                                             |
| 40 |                               |                                                    |                          |                                             |
| 41 |                               |                                                    |                          |                                             |

#### Motor data

Electrical and dimensional data refer to IE3 motor

|    |                  |                                                   |                      |                                 |
|----|------------------|---------------------------------------------------|----------------------|---------------------------------|
| 42 | Manufacturer     | WEG                                               | Manufacturer         | Flender                         |
| 43 | Specific design  | IE3 3ph Surface Motor - W 22 - Premium Efficiency | Series               | N-EUPEX - Type A                |
| 44 | Type             | W22 355 A/B B3 500 kW                             | Spacer length        | 4 mm Suitable for EEx-design NO |
| 45 | Rated power      | 500 kW                                            | Rated current        | 882 A                           |
| 46 | Nominal speed    | 1492 1/min                                        | Rated voltage        | 400 V                           |
| 47 | Frame size       | 355 A/B                                           | Service factor       | 1                               |
| 48 | Weight           | kg 2,246.0                                        | Degree of protection | IP55                            |
| 49 | Length shaft end | 210 mm                                            | Design acc. standard | IEC                             |

#### Base plate

|    |        |                     |         |
|----|--------|---------------------|---------|
| 50 | Name   | FRAME XC31-1027-354 | Remarks |
| 51 | Weight | kg 550.0            |         |
| 52 |        |                     |         |

1) Flange in Flat Face (FF) execution not according to EN1092-2 (Face Form A), only drilling according Standard EN1092-2

|         |                              |            |             |            |
|---------|------------------------------|------------|-------------|------------|
| Project | Xylect-21422756              | Created by | Last update | 11/11/2023 |
| Block   | e-XC250-730/5000W/W 45BDS4AG | Created on | 11/11/2023  |            |

## e-XC250-730/5000WW45BDS4AG

### Performance curve


Company name  
Contact  
Phone number  
e-mail address

|        | Ø<br>inch | Pump capacity                   |              |                   | Pump head   |                | Shaft power P2 |            |                 | Frequency       | Hz    | 50    |
|--------|-----------|---------------------------------|--------------|-------------------|-------------|----------------|----------------|------------|-----------------|-----------------|-------|-------|
|        |           | Operating range<br>Min.<br>m³/h | Max.<br>m³/h | η<br>Max.<br>m³/h | H(Q=0)<br>m | η<br>Max.<br>m | P2(Q=0)<br>kW  | Max.<br>kW | η<br>Max.<br>kW | Operating speed | 1/min | 1492  |
| actual | 584       | 394                             | 1350         | 1110              | 133         | 114            |                | 471        | 419             | Nominal flow    | m³/h  | 1125  |
| Min.   | 480       | /                               | /            | 863               | 89.5        | 77.9           |                | /          | 231             | Nominal head    | m     | 100   |
| Max.   | 730       | /                               | /            | 1390              | 199         | 174            |                | /          | 789             | Inlet pressure  | bar   | 0     |
|        |           |                                 |              |                   |             |                |                |            |                 | Static head     | m     | 44.88 |

#### Power datas referred to:

Water, pure [100%] ; 4°C; 1kg/dm³; 1.57mm²/s

#### hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 2B

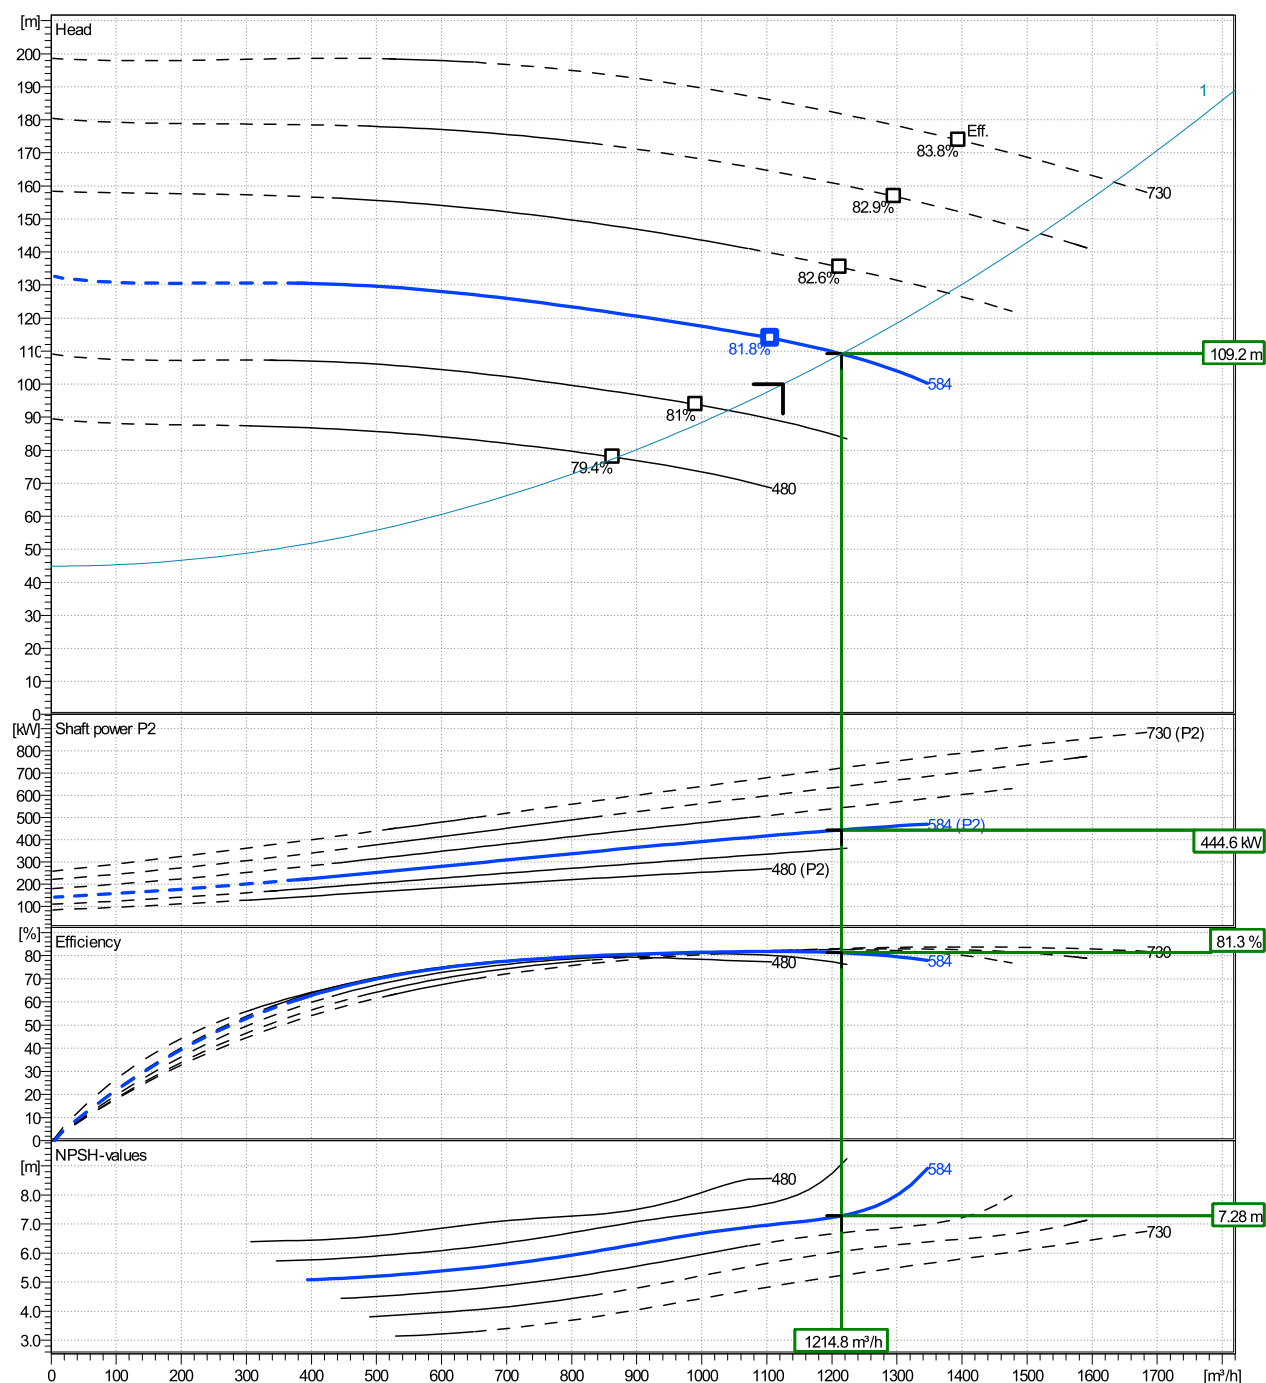

## e-XC250-730/5000W/W45BDS4AG

## Dimensions

Company name  
Contact  
Phone number  
e-mail address



Complete Unit with Baseplate

Clockwise Rotation - viewed from motor end [STD]

IE3 3ph Surface Motor - W22 - Premium Efficiency

W22 355 A/B B3 500 kW

Electrical and dimensional data refer to IE3 motor

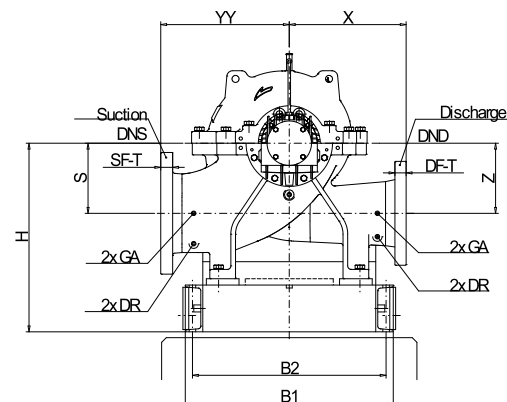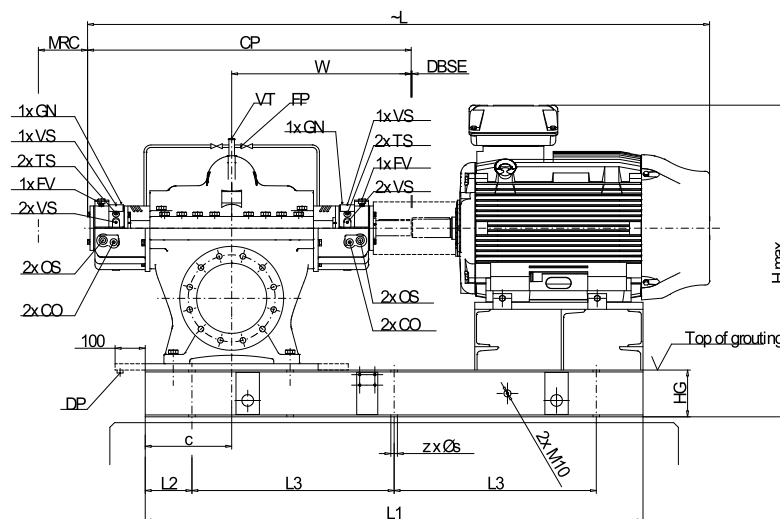


DR ... Drain Rp1/2  
FP ... Flush Rp3/8  
FV ... Fill/Vent Cup Rp3/8 standard  
GA ... Gauge Connection Rp1/2  
GN ... Grease Nipple M10x1 standard  
TS ... Temperature Sensor M10x1  
VT ... VentRp1/2  
VS ...

Rotation: CW View from Motor to Pump

MRC .... Minimum removal clearance for bearing and seal maintenance

DBSE ... Distance between shaft ends



| Dimensions [ mm ] |      |       |     |
|-------------------|------|-------|-----|
| B1                | 1030 | SF-ND | 300 |
| B2                | 960  | SF-OD | 460 |
| c                 | 345  | W     | 838 |
| CP                | 1484 | X     | 650 |
| DBSE              | 4    | YY    | 800 |
| DF-BC             | 355  | Z     | 500 |
| DF-HH             | 28   | z     | 8x  |
| DF-HQ             | 12x  |       |     |
| DF-ND             | 250  |       |     |
| DF-OD             | 405  |       |     |
| H Max.            | 1782 |       |     |
| H                 | 1027 |       |     |
| H1                | 800  |       |     |
| HD1               | 800  |       |     |
| HG                | 200  |       |     |
| L                 | 3165 |       |     |
| L1                | 2600 |       |     |
| L2                | 250  |       |     |
| L3                | 700  |       |     |
| MRC               | 3    |       |     |
| s                 | 29   |       |     |
| S                 | 500  |       |     |
| SF-BC             | 410  |       |     |
| SF-HH             | 28   |       |     |
| SF-HQ             | 12x  |       |     |

| Connections             |                         |
|-------------------------|-------------------------|
| <b>Suction nozzle</b>   | <b>Discharge nozzle</b> |
| DN 300                  | DN 250                  |
| PN16                    | PN16                    |
| EN 1092-2 <sup>1)</sup> | EN 1092-2 <sup>1)</sup> |
| <b>Weight (+/- 5%)</b>  |                         |
| Pump                    | 1,704 kg                |
| Coupling                | 71 kg                   |
| Coupling guard          | 26 kg                   |
| Base plate              | 550 kg                  |
| Motor                   | 2,246 kg                |
| <b>Total weight</b>     | <b>4,597 kg</b>         |

### Dimensions and weight without obligation

<sup>1)</sup> Flange in Flat Face (FF) execution not according to EN1092-2 (Face Form A), only drilling according Standard EN1092-2

|         |                               |            |                        |                         |
|---------|-------------------------------|------------|------------------------|-------------------------|
| Project | Project ID<br>Xylect-21422756 | Created by | Created on<br>11-11-23 | Last update<br>11-11-23 |
|---------|-------------------------------|------------|------------------------|-------------------------|