

e-XC300-525/2000W/L45BDS4AG

Technical data

Company name
Contact
Phone number
e-mail address

Operating data

1	Pumpe type	Single head pump	Fluid	Water, pure
2	No. of pumps	1	Operating temperature t A	°C 4
3	Nominal flow	m³/h 1125	Max / Min Operating Temperature	°C /
4	Nominal head	m 45	pH-value at t A	7
5	Static head	m 16.59	Density at t A	kg/dm³ 1
6	Inlet pressure	bar 0	Kin. viscosity at t A	mm²/s 1.569
7	Environmental temperature	°C 20	Vapor pressure at t A	bar 1
8	Available system NPSH	m 0	Altitude	0

Pump data

9	Lubrication	Grease Lubricated [STD]		
10	Execution	Clockwise Rotation - viewed from motor end [STD]	Max.	mm 540
11	Design	Double Suction Split Case Pumps	designed	mm 405
12	Operating speed	1490 1/min	Min.	mm 370
13	Suction nozzle	DN 400 / PN16 / EN 1092-2 1)	Nominal	m³/h 1152
14	Discharge nozzle	DN 300 / PN16 / EN 1092-2 1)	Max-	m³/h 1505.4
15	Max. casing pressure	bar 27.6	Min-	m³/h 393.7
16	Max. working pressure	bar 5.6		
17	Impeller type	Radial impeller	Nominal	m 46.4
18	Head H(Q=0)	m 57	at Qmax	m 33.8
19	Max. shaft power	kW 197.3	at Qmin	m 57.1
20	Pump weight	kg	Head	
21	Total weight	kg 3,553.3	Shaft power	kW 183.9
			Efficiency	% 78.8
			NPSH 3%	m 5.5

Materials

22		Pump		Shaft Seal
23	Casings	[D] - EN-GJS-500-7 / QT500-7 / ASTM A536, 80-55-06		Rubber below seal [STD]
24	Impeller + Impeller Wear Ring	[S] - 304 SS - 1.4308 / ZG0Cr18Ni9 / ASTM - CF8	MR2 - Seal on sleeve	4
25	Shaft Construction	Dry (sleeves) [STD]	Mechanical seal diameter	110 mm
26	Shaft	1.7035 / 40Cr / AISI - 5140	Seal faces	Carbon [STD]
27	Shaft Sleeves	304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304	Stationary ring	Silicon Carbide
28	Shaft Sleeve Nuts	304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304	Elastomers	EPDM [STD]
29	Casing Wear Ring	Bronze - CuSn8Zn4 / ASTM - C90300	Springs	316 SS - 1.4401 / 0Cr17Ni12Mo2 / AISI - 316
30	Lantern Ring	Cast Iron	Other metal parts	316 SS - 1.4401 / 0Cr17Ni12Mo2 / AISI - 316
31	Seal flush lines	304 SS - 1.4301 / 0Cr18Ni9 / AISI - 304	Material code	Carbon-SiC-EPDM [STD]
32				
33				
34				
35				
36				
37				
38				
39				
40				
41				

Motor data

Electrical and dimensional data refer to IE4 motor

42	Manufacturer	Lowara	Manufacturer	Flender
43	Specific design	IE4 3ph Surface Motor - Super Premium Efficiency	Series	N-EUPEX - Type A
44	Type	3MGS 315 M B3 200 kW E4	Spacer length	4 mm
45	Rated power	200 kW	Suitable for EEx-design	NO
46	Nominal speed	1490 1/min	Rated current	335 A
47	Frame size	315 M	Rated voltage	400 V
48	Weight	kg 1,520.0	Service factor	1
49	Length shaft end	170 mm	Degree of protection	IP55
			Design acc. standard	IEC

Base plate

50	Name	FRAME XC28-887-314	Coupling	
51	Weight	kg 490.0	CG-04	
52			Coupling protection	Material 1.0038 RAL 2000 painted
			Weight	18 kg

1) Flange in Flat Face (FF) execution not according to EN1092-2 (Face Form A), only drilling according Standard EN1092-2

Project	Xylect-21422756	Created by	Last update	11/11/2023
Block	e-XC300-525/2000W/L45BDS4AG	Created on	11/11/2023	

e-XC300-525/2000W/L45BDS4AG

Performance curve


Company name
Contact
Phone number
e-mail address

	Ø inch	Pump capacity			Pump head		Shaft power P2			Frequency	Hz	50
		Operating range Min. m³/h	Max. m³/h	η Max. m³/h	H(Q=0) m	η Max. m	P2(Q=0) kW	Max. kW	η Max. kW	Operating speed	1/min	1490
actual	405	394	1510	1220	57.3	44.5	197	186		Nominal flow	m³/h	1125
Min.	370	/	/	1090	47.8	37.5	/	154		Nominal head	m	45
Max.	540	/	/	1530	102	85.4	/	408		Inlet pressure	bar	0
										Static head	m	16.59

Power datas referred to:

Water, pure [100%] ; 4°C; 1kg/dm³; 1.57mm²/s

hydr. Performance acceptance acc. To EN ISO 9906 Class Grade 2B

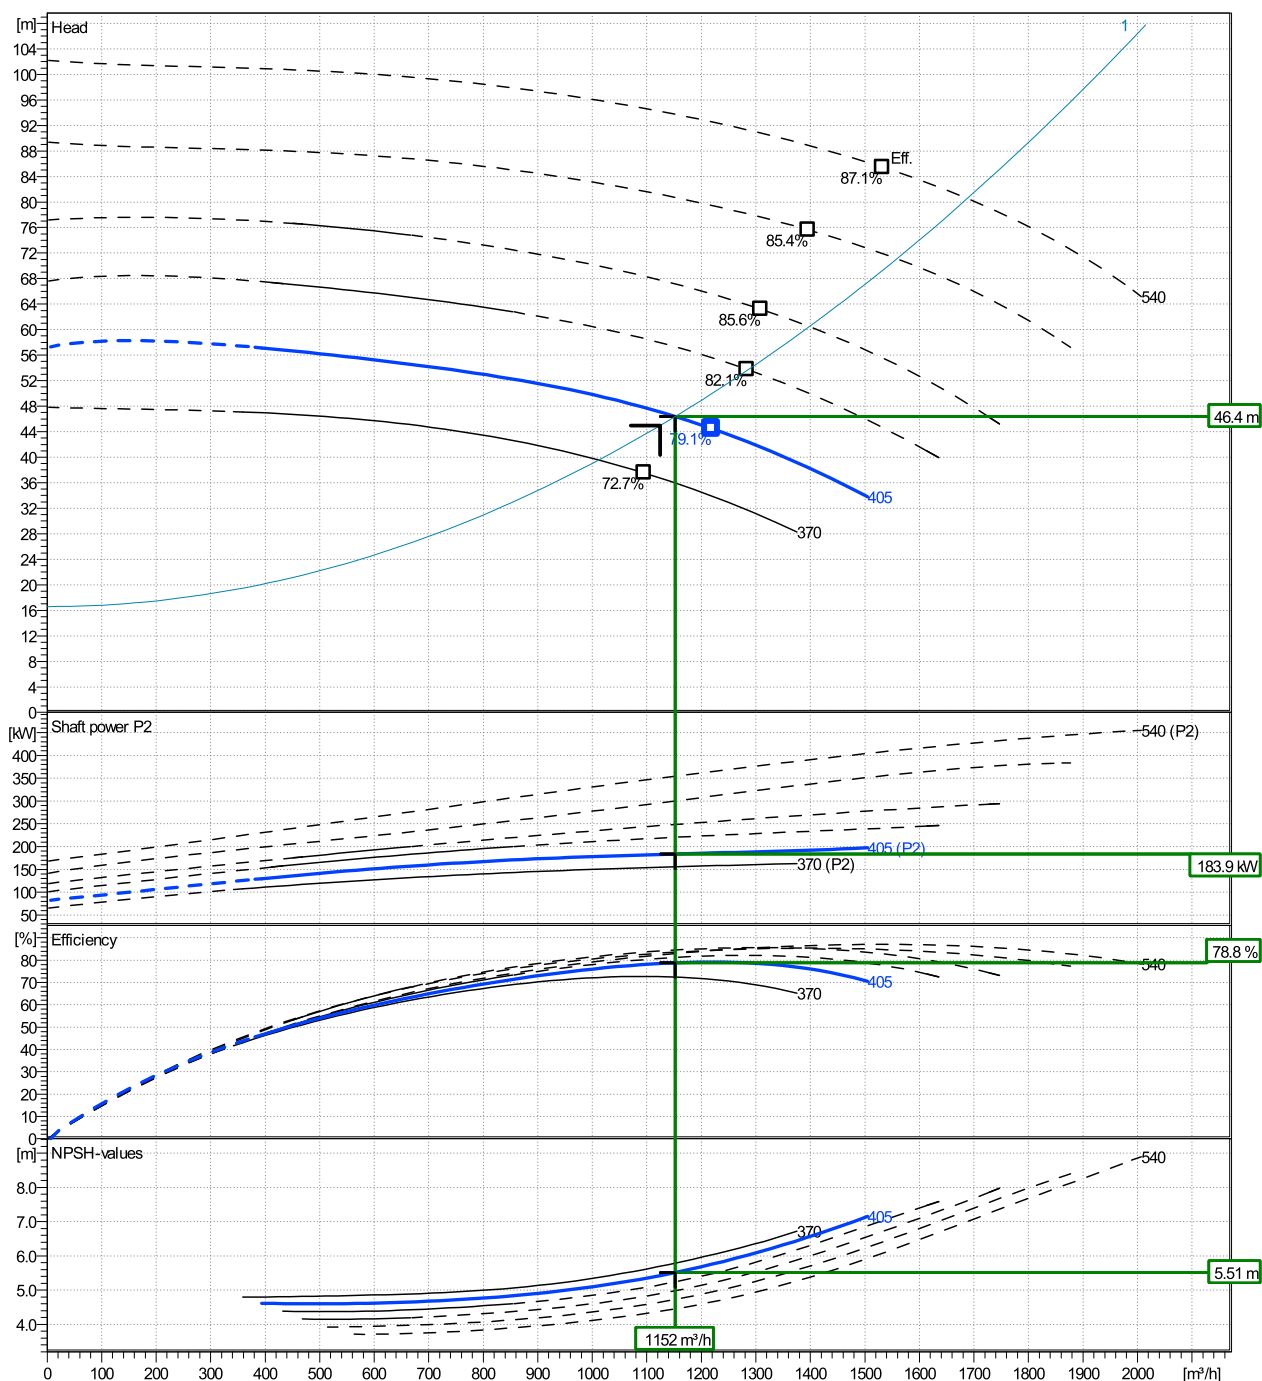



e-XC300-525/2000W/L45BDS4AG

Dimensions

Company name
Contact
Phone number
e-mail address

Complete Unit with Baseplate
Clockwise Rotation - viewed from motor end [STD]
IE4 3ph Surface Motor - Super Premium Efficiency
3MGS 315 M B3 200 kW E4


Electrical and dimensional data refer to IE4 motor

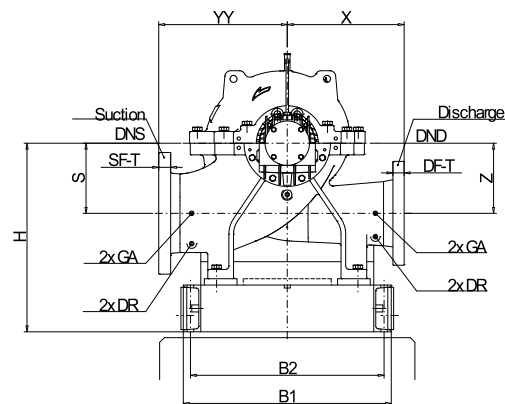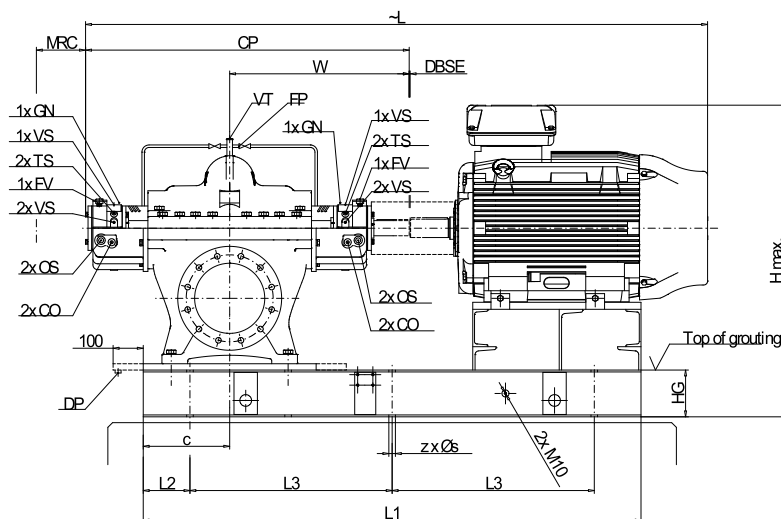

DR ... Drain Rp1/2
FP ... Flush Rp3/8
FV ... Fill/Vent Cup Rp3/8 standard
GA ... Gauge Connection Rp1/2
GN ... Grease Nipple M10x1 standard
TS ... Temperature Sensor M10x1
VT ... Vent Rp1/2
VS ...

Rotation: CW View from Motor to Pump

MRC Minimum removal clearance for bearing and seal maintenance
DBSE ... Distance between shaft ends



Dimensions [mm]			
B1	1030	SF-ND	400
B2	980	SF-OD	580
c	345	W	908
CP	1635	X	600
DBSE	4	YY	650
DF-BC	410	Z	350
DF-HH	28	z	6x
DF-HQ	12x		
DF-ND	300		
DF-OD	460		
H Max.	1412		
H	887		
H1	700		
HD1	700		
HG	160		
L	2795		
L1	2250		
L2	200		
L3	925		
MRC	4		
s	26		
S	350		
SF-BC	525		
SF-HH	31		
SF-HQ	16x		

Connections	
Suction nozzle	Discharge nozzle
DN 400	DN 300
PN16	PN16
EN 1092-2 ¹⁾	EN 1092-2 ¹⁾
Weight (+/- 5%)	
Pump	1,490 kg
Coupling	35 kg
Coupling guard	18 kg
Base plate	490 kg
Motor	1,520 kg
Total weight	3,553 kg

Dimensions and weight without obligation

¹⁾ Flange in Flat Face (FF) execution not according to EN1092-2 (Face Form A), only drilling according Standard EN1092-2

Project	Project ID Xylect-21422756	Created by	Created on 11-11-23	Last update 11-11-23
---------	-------------------------------	------------	------------------------	-------------------------