

REVIVE 2024 Report

Resilience and ADORB Summary

Morphed_Chicago-MDW_IECC+0.04_Elec+Shd

1 Introduction

Some regular text and some *italic text*.

Also some crazy characters: \$&#{}

1.1 Math that is incorrect

$$2 * 3 = 9$$

2 Tables

Tables for thermal resilience and ADORB Costs

2.1 Resilience Single Point Metrics

Metric	Result	Unit
Heating SET Hours	37.52	°F hr
Hours Below 2°C	0.0	hr
Caution (> 26.7, < 32.2°C)	40.25	hr
Extreme Caution (> 32.2, < 39.4°C)	54.75	hr
Danger (> 39.4, < 51.7°C)	44.25	hr
Extreme Danger (> 51.7°C)	0.0	hr
Heating Battery Size	6.946238079071673	kWh
Cooling Battery Size	4.69877495296324	kWh

2.2 Adorb Single Point Metrics

Metric	Result	Unit
Energy Use Intensity	17.41	kBtu/ sf yr
Peak Electrical Load	5968.16	W
First Year Electric Cost	1252.945625420097	\$
First Cost	11417.922	\$
Total ADORB Cost	92122.73511868183	\$


3 Graph Results

Some regular text and some

3.1 Resilience Graph Results

3.2 Adorb Graph Results

Morphed_Chicago-MDW_IECC+0.04_Elec+Shd_Heating Outage Resilience

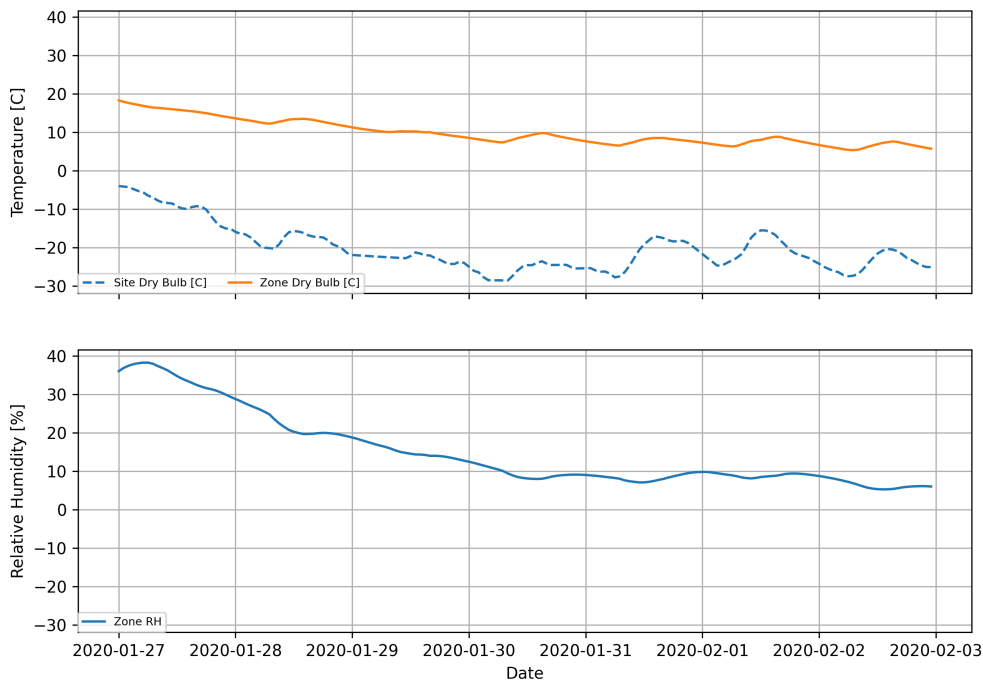

Morphed_Chicago-MDW_IECC+0.04_Elec+Shd_Cooling Outage Resilience

