

# REVIVE 2024 Report

## Resilience and ADORB Summary

Morphed\_Chicago-MDW\_BASE+Shd

## 1 Introduction

Some regular text and some *italic text*.

Also some crazy characters: \$&#{}

### 1.1 Math that is incorrect

$$2 * 3 = 9$$

## 2 Tables

Tables for thermal resilience and ADORB Costs

### 2.1 Resilience Single Point Metrics

Metric	Result	Unit
Heating SET Hours	1303.29	°F hr
Hours Below 2°C	123.62	hr
Caution (> 26.7, < 32.2°C)	41.0	hr
Extreme Caution (> 32.2, < 39.4°C)	97.25	hr
Danger (> 39.4, < 51.7°C)	1.75	hr
Extreme Danger (> 51.7°C)	0.0	hr
Heating Battery Size	7.281205126254802	kWh
Cooling Battery Size	4.69877495296324	kWh

### 2.2 Adorb Single Point Metrics

Metric	Result	Unit
Energy Use Intensity	37.71	kBtu/ sf yr
Peak Electrical Load	19672.74	W
First Year Electric Cost	2883.777965973397	\$
First Cost	0	\$
Total ADORB Cost	179025.32075252561	\$


## 3 Graph Results

Some regular text and some

### 3.1 Resilience Graph Results

### 3.2 Adorb Graph Results

Morphed\_Chicago-MDW\_BASE+Shd\_Heating Outage Resilience

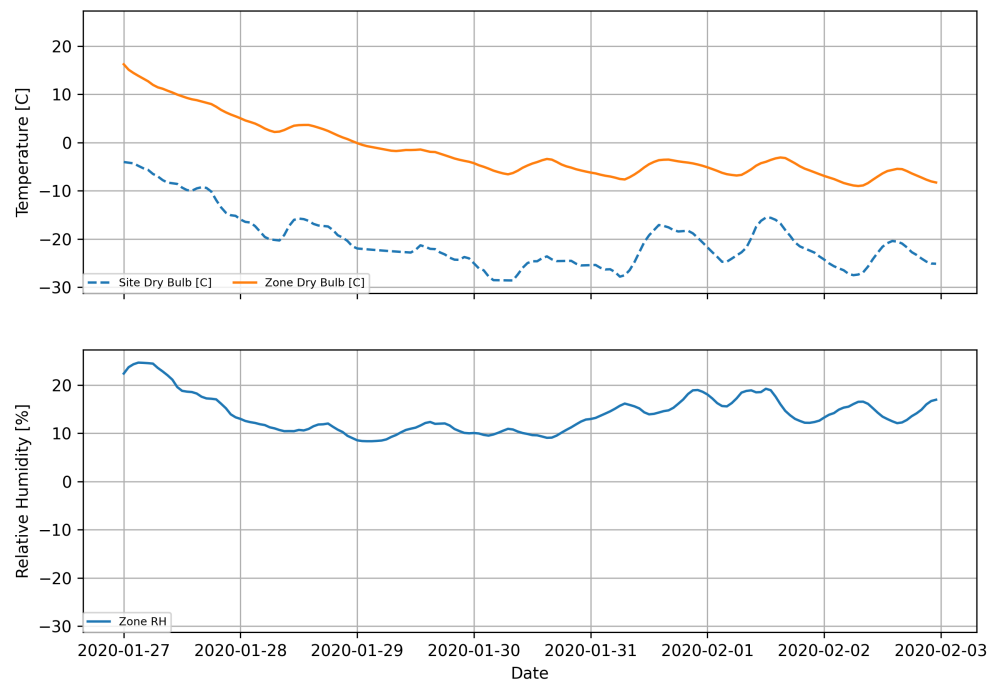

Morphed\_Chicago-MDW\_BASE+Shd\_Cooling Outage Resilience

