


The 3.3V pin can source 80mA of which 25mA is used by USB regulator when active. See table 29.2 in datasheet.

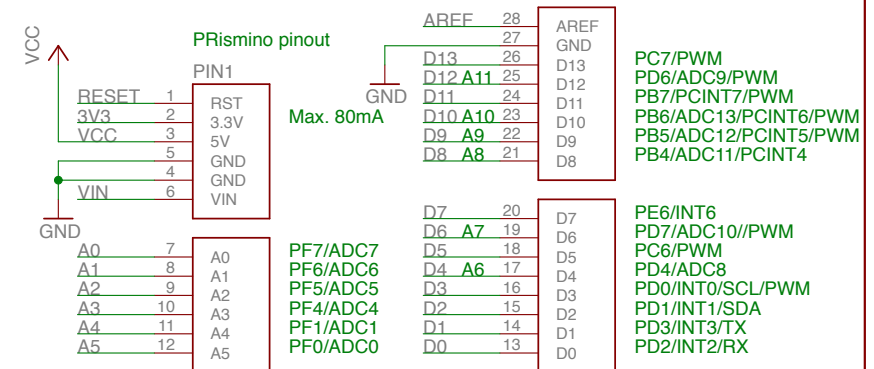

See ATmega32U4 datasheet for complete list of secondary pin functions