The user manual for FY3D-AD Hologram LED FAN AD DISPLAY

Name:	3D Hologram Advertising Display LED Fan
Model Number	FY3D-AD
Power	10-15W
Display Diameter	420mm
Viewing angle	150°
Content	MP4, Avi, Rmvb, GIF, JPG.mkv.Png
3D Effect Format	MP4 or GIF with black background
Software	converting and setting the content to SD card.
Content Upload	insert SD card
Input Voltage	100-240V AC 50/60Hz
Resolution(pixel)	450*224
Frame material	ABS+PC+Aluminum
machine size	420*130*110mm
Packing size	130*51-*170mm
Weight	1.5KG
LED quantity	224pcs
LED type	RGB0805LED light
LED life	100000hours
Work environment	indoor, non-waterproof
Installation	mounted on wall
Application	indoor advertising for shop, bar, casino, restaurant etc.
Computer operating system	Windows XP / 7 / 8/ 10
working video on Youtube	https://youtu.be/wEjeNiVZf1A https://youtu.be/Ivt8QXrXluM

Note:

Please DO NOT disassemble the product without professionals in order to avoid damage or personal injury.

Please install the product in the position (like over 3.5m Height)which the human can not contact, otherwise must have the protective cover.
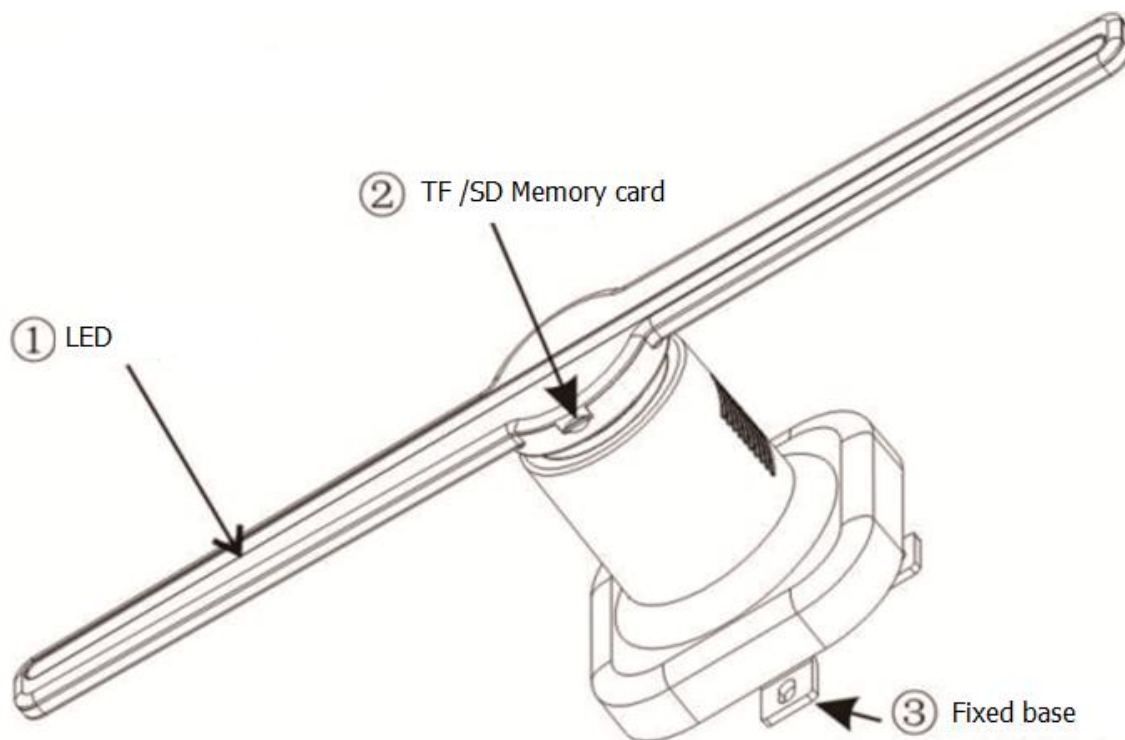
Contact our factory:
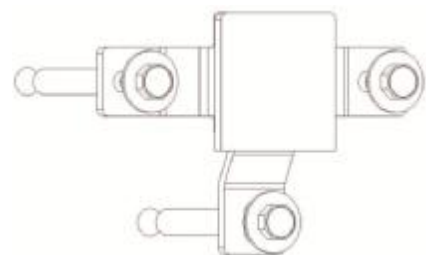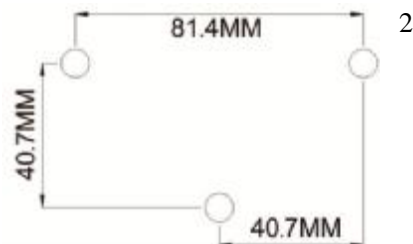Manager: Ella Tan
Email: SALES3@ELE-B2B.COM
Website: www.3dprinter1.net, www.ele-b2b.com, www.chinafaryuan.com ,
https://lite1687.en.alibaba.com/
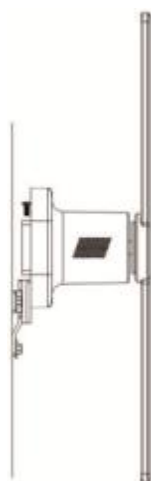Tel: +86-13566524304

② TF /SD Memory card

① LED

③ Fixed base

In the target mounting area, set 3 fixed holes like belows,and the aperture is 8mm:

1

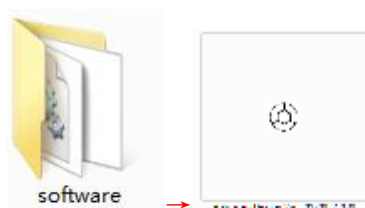install the base

81.4MM

40.7MM

40.7MM

2

3

put the machine on the base and
with the SD card ,
power on,
it will work right now.

4

Firstly take the SD card from machine and link with Card reader like picture , and then USB linked with computer

5

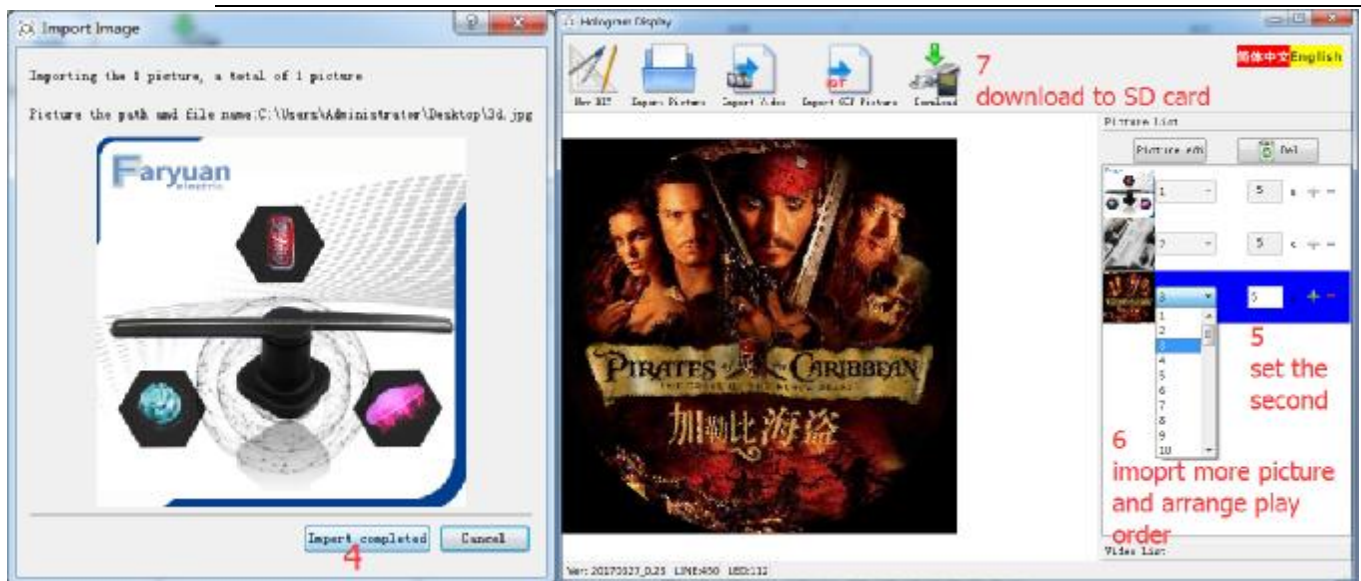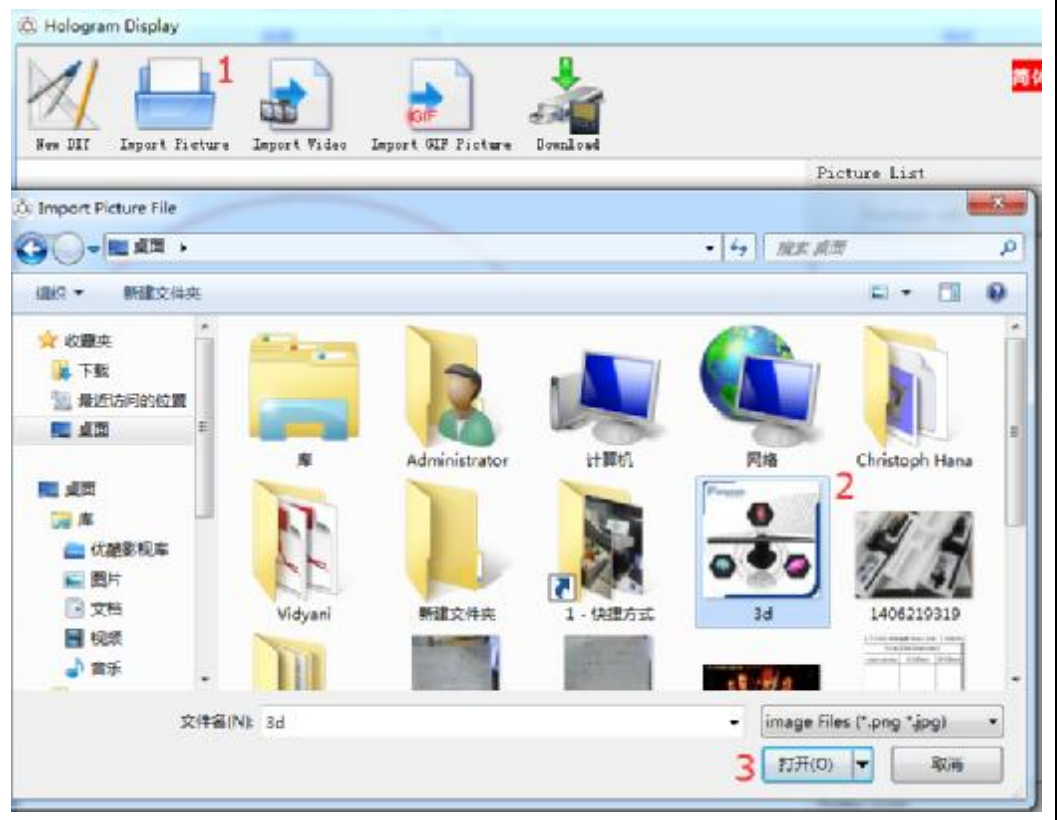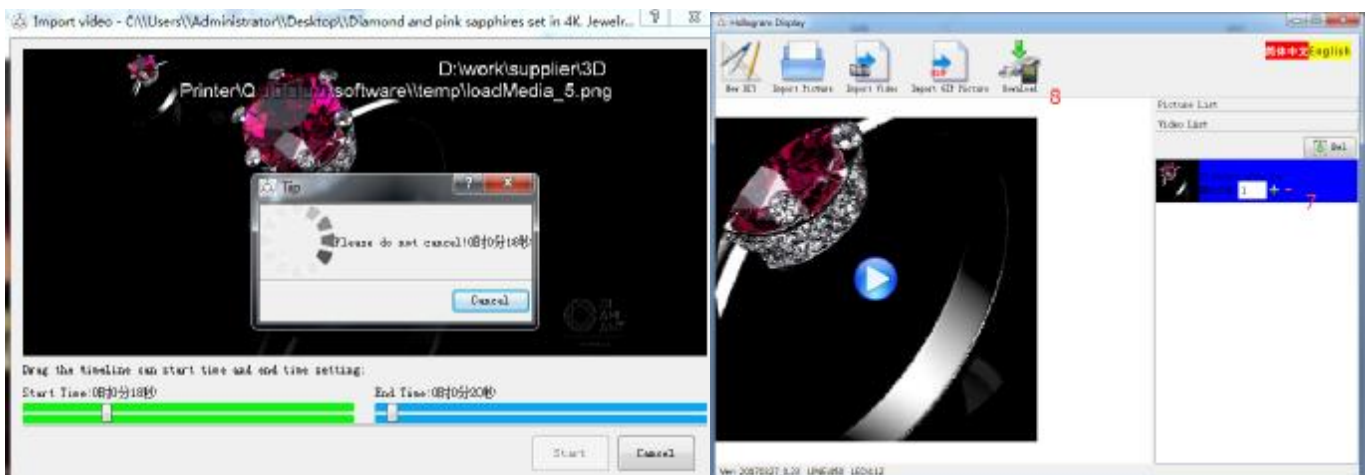open the SD card and Copy the software to computer and check the READ ME .txt (a video on youtube : https://youtu.be/KHzc 5xvruZE)

software

6

Open the software

7.1
Open picture

JPG ， Pngge

7 download to SD card

5 set the second

6 imoprt more picture and arrange play order

Import completed   Cancel
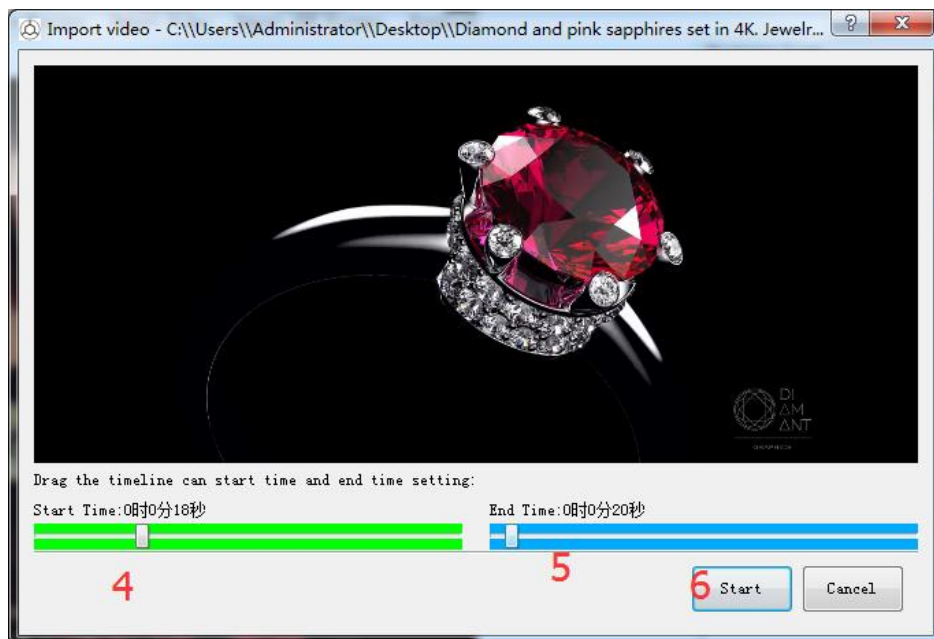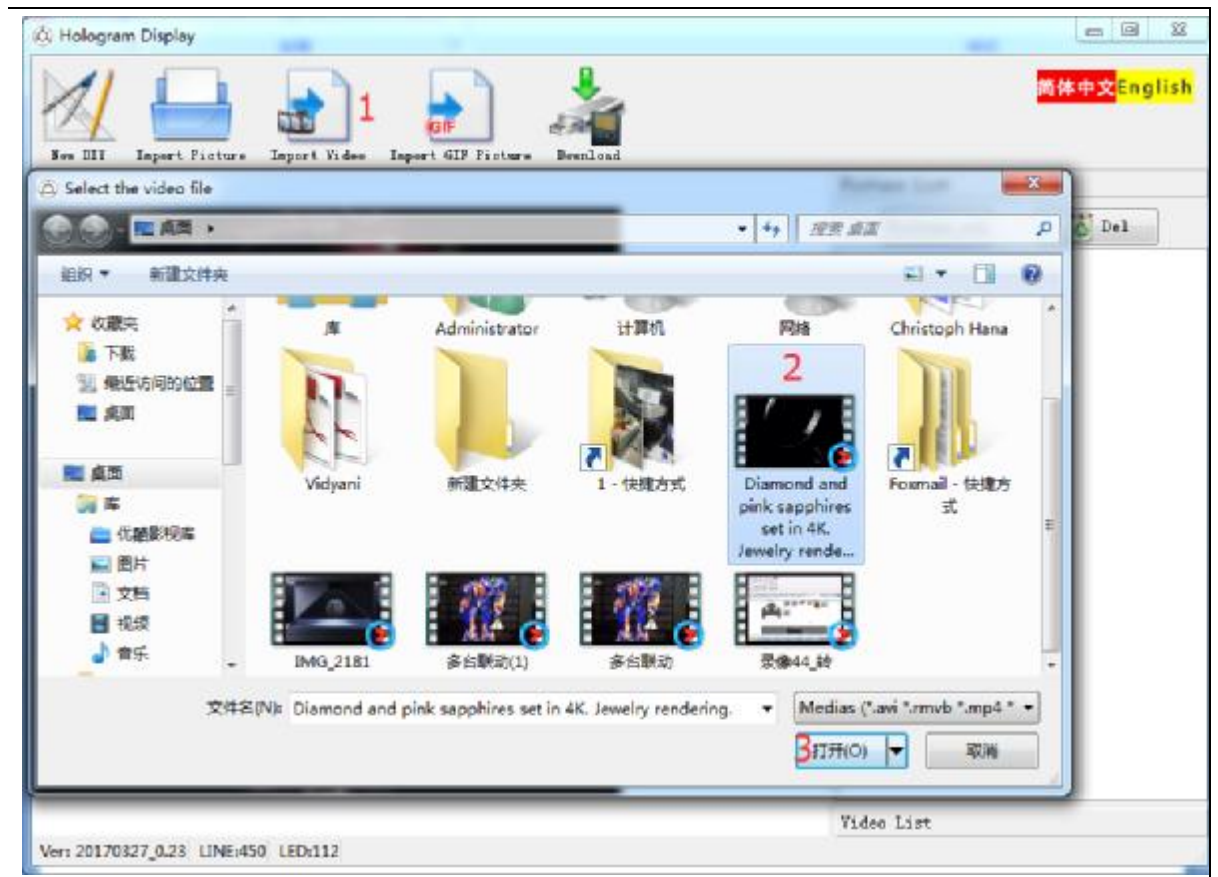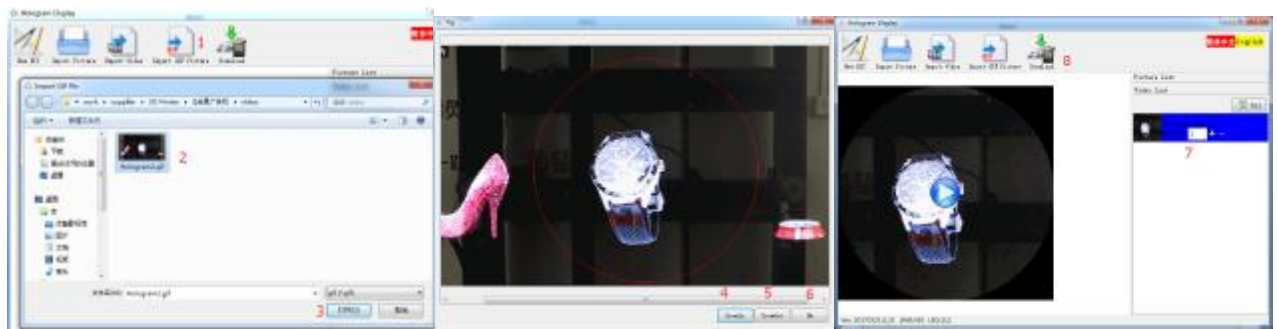4

7.2 open video

MP4, Avi, Rmvb

8
GIF

9

Put the sd card in LED FAN and power on

10

Replace the battery for remote control;

remote control's function is on –off switch.

The battery is 27A,12V .

Contact our factory:
Manager: Ella Tan
Email: SALES3@ELE-B2B.COM
Website: www.3dprinter1.net, www.ele-b2b.com, www.chinafaryuan.com ,
https://lite1687.en.alibaba.com/
Tel: +86-13566524304