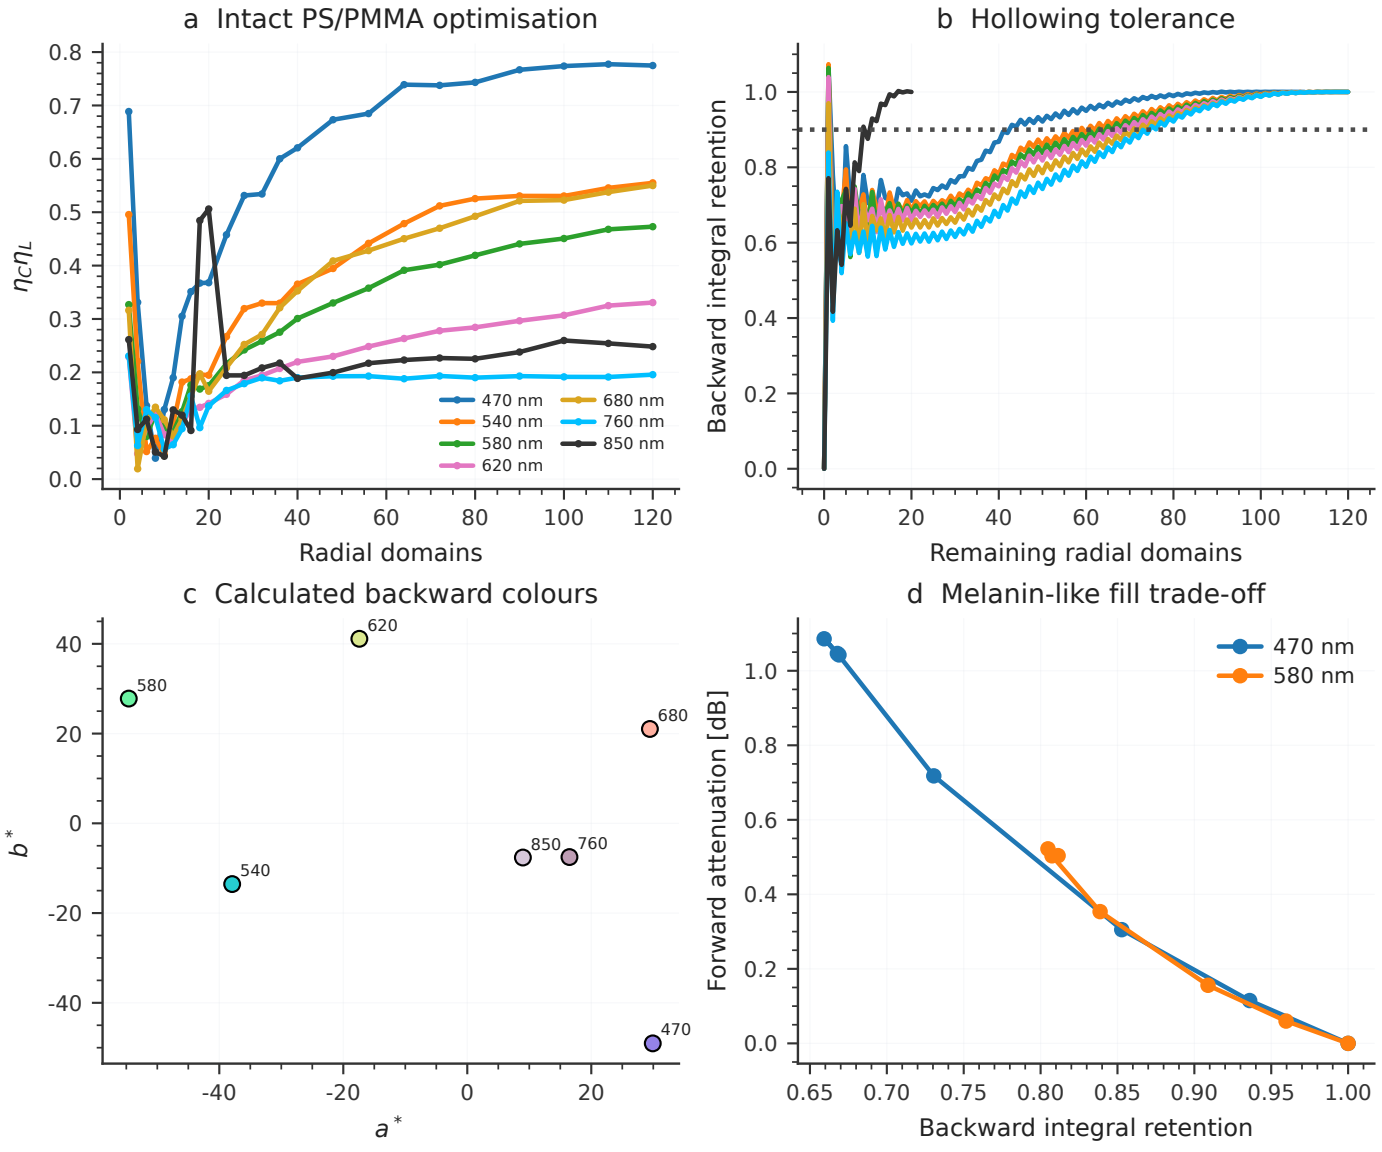
a Intact PS/PMMA optimisation
$\eta_C\eta_L$
Radial domains
470 nm
540 nm
580 nm
620 nm
680 nm
760 nm
850 nm
b Hollowing tolerance
Backward integral retention
Remaining radial domains
c Calculated backward colours
b^*
a^*
620
580
680
850
760
540
470
d Melanin-like fill trade-off
Forward attenuation [dB]
Backward integral retention
470 nm
580 nm