

SpaceHopper: A Bio-Inspired Legged Swarm Robot for Microgravity Asteroid Exploration and Sampling

Melvin Jacob Sajan* Dr. Vyshak Sureshkumar*

Department of Mechatronics Engineering
Manipal Academy of Higher Education, Dubai
melvinsajan20@gmail.com

Abstract—The exploration of low-gravity near-Earth objects (NEOs), such as the C-type asteroid 162173 Ryugu, poses unique traversal and sampling challenges. Traditional wheeled rovers lack sufficient traction in microgravity environments characterized by porous, rubble-pile topography. This paper presents the design and simulation validation of SpaceHopper, a 2.5 kg tri-pedal hopping robot with 3-axis reaction-wheel attitude control, deployed as a three-agent autonomous swarm. A high-fidelity Ryugu environment — terrain derived from the Hayabusa2 shape model, surface gravity of $1.14 \times 10^{-4} \text{ m/s}^2$ — was constructed in the Gazebo Harmonic physics engine, and the complete mission loop (market-based task auction, directional hopping, stabilized ballistic flight, micro-gravity landing detection, reaction-wheel self-righting, and core sampling) was verified end-to-end with live telemetry. Measured performance includes rate-commandable launch separation with single-hop heading fidelity of 1° against the commanded azimuth, multi-metre directional hops on clean ~ 20 -minute ballistic arcs, in-flight body rates damped below 0.015 rad/s , and reaction-wheel self-righting that reliably recovers the moderate tilts characteristic of a milli-gravity landing (a redesign that raised measured success from a 24% baseline, honestly bounded in §7). We further report four empirically derived laws of milli-gravity ground operations — contact dynamics, not actuator torque, are the binding design constraint; active landing compliance is destabilizing under feedback latency; every grounded actuator motion constitutes a propulsion event; and attitude authority must be tied to commanded flight, because full stabilization armed by residual motion pumps energy against the surface in a self-sustaining loop — which we believe generalize to any small-body surface robot.

1. INTRODUCTION

Asteroids are primitive remnants of the early solar system, offering vital clues to planetary formation and the origin of water on Earth. Following the success of JAXA's Hayabusa2 mission [1], it became clear that highly mobile, surface-dwelling assets are essential for comprehensive *in-situ* analysis. Ryugu, characterized as a "spinning top-shaped rubble pile" [1], combines extremely low surface gravity with highly uneven terrain. Under these conditions, conventional wheeled locomotion suffers from massive slip and risk of permanent entrapment, while purely passive hoppers such as MINERVA-II [8] sacrifice trajectory control.

We propose a swarm-capable, legged hopping architecture — in the multi-agent robotics taxonomy of Dudek et al. [12], a homogeneous, communicating, dynamically-role-allocating team — that combines articulated tri-pedal launch mechanics

with active reaction-wheel attitude control. This paper details the platform's hardware parameterization and kinematic design, the simulation environment used to validate it, the control architecture that emerged from live closed-loop testing, and the measured performance of the complete three-agent mission loop. Particular attention is given to the ground-contact regime: the majority of the platform's development difficulty concentrated not in flight control, where classical spacecraft methods transfer directly, but in the few seconds surrounding launch and touchdown, where milli-gravity invalidates terrestrial legged-robotics intuition.

2. ENVIRONMENTAL SIMULATION PIPELINE

Accurate physical evaluation of locomotion strategies necessitates a high-fidelity simulation environment. The system is implemented on ROS 2 Humble with the Gazebo Harmonic (gz-sim 8) physics engine using the DART backend.

2.1 Topographical Modeling

A 1025×1025 collision heightmap was derived from the official Hayabusa2 Structure-from-Motion shape model (SHAPE_SFM_49k_v20180804.obj) [3]. The selected cross-section reflects the dense cratering and rocky ridges characteristic of Ryugu's equatorial band, mapped onto a $100 \text{ m} \times 100 \text{ m}$ traversal field with 5 m of vertical relief.

2.2 Microgravity and Illumination

The gravity vector was set to $1.14 \times 10^{-4} \text{ m/s}^2$, the lower bound of Ryugu's latitude-dependent surface gravity [1] and the most demanding case for traction and rebound control. The celestial backdrop is the ESO/S. Brunier Milky Way panorama mapped onto an equirectangular sky sphere [4]; scene illumination is a single directional source representing the Sun, consistent with Ryugu's atmosphere-free lighting. Solar power is physically plausible at Ryugu's 0.96–1.42 AU orbit [1] ($\sim 960 \text{ W/m}^2$ at the 1.19 AU semi-major axis) — the same orbital regime the solar-powered MINERVA-II rovers operated in, though [8] describes the MINERVA mobility concept rather than measured on-orbit power performance, so this is stated as a plausibility check against Ryugu's known orbit, not a claim independently corroborated by MINERVA-II telemetry.

*Corresponding author: Dr. Vyshak Sureshkumar.

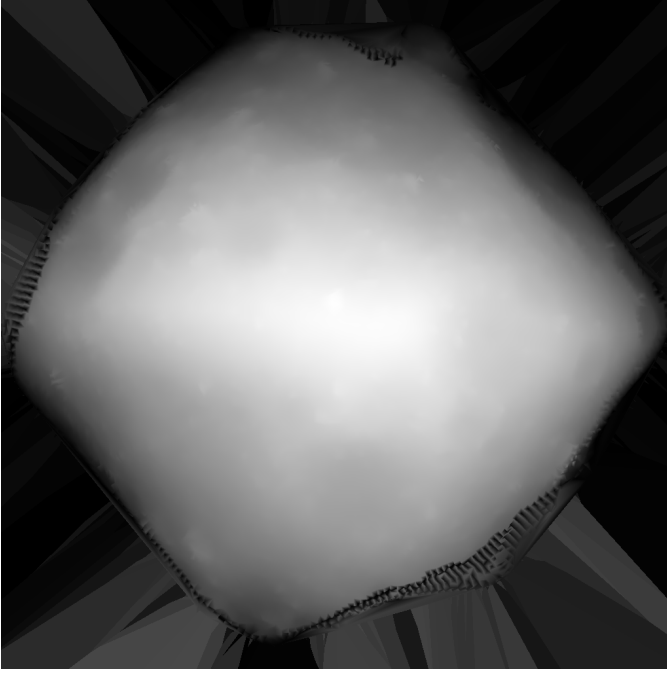


Fig. 1. Lateral X-axis projection heightmap derived from the Hayabusa2 SfM shape model, detailing Ryugu’s equatorial ridge.

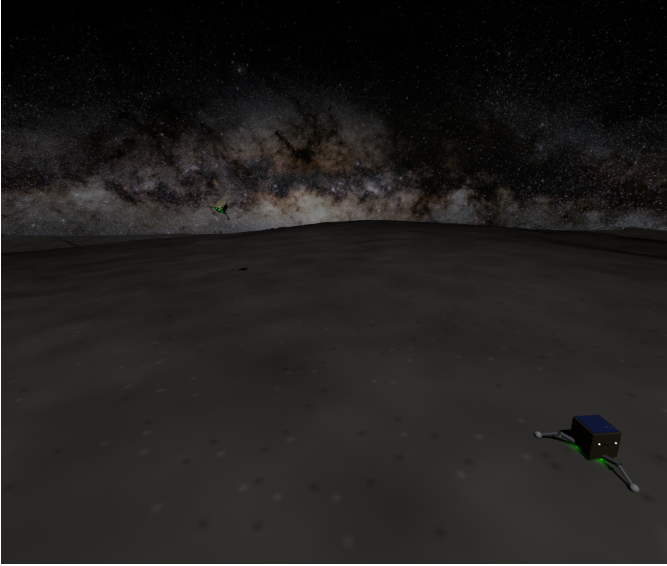


Fig. 2. The simulated environment — heightmap regolith terrain beneath the ESO Milky Way panorama, with a landed scout in the foreground and a second agent visible against the galactic band.

2.3 Software Architecture

Each agent runs an identical four-node control stack; a single swarm-coordination node and a telemetry dashboard serve the fleet. All actuator and sensor traffic crosses a per-agent ROS–Gazebo bridge:



Fig. 3. System architecture. The landed and righting_active flags implement strict actuator arbitration — exactly one node commands any actuator at any time (§8).

Subsystem	Components Included
Chassis	Aluminum 7075-T6 core, CFRP structural panels
Locomotion	6× Maxon RE 13 leg motors (hip+knee ×3), planetary gear
Attitude Control	3× Maxon EC 20 flat RW motors + flywheels (X/Y/Z)
Avionics & Sensors	Flight computer, IMU, S-Band comms
Power System	4× space-grade Li-ion 18650 cells, BMS
Scientific Payload	Rotary-percussive micro-corer, storage carousel
Thermal & Solar	GaAs solar arrays, Kapton MLI blankets
Total Operational Mass	

3. SYSTEM DESIGN

The SpaceHopper is a compact, 2.50 kg tri-pedal robot whose mass distribution keeps the center of gravity close to the geometric center:

3.1 Jumping Dynamics

The operational weight on Ryugu is merely $W = 2.50 \times 1.14 \times 10^{-4} = 2.85 \times 10^{-4}$ N. As a representative energy-budget scale (an illustrative upper-bound design case, not a claim about typically-achieved height — the actually measured apex is far smaller and is reported precisely in §7), a 5 m vertical hop requires potential energy

$$E_p = mgh = 2.5 \times 1.14 \times 10^{-4} \times 5 = 1.43 \times 10^{-3} \text{ J},$$

and with a leg stroke of $d = 0.1$ m — a round-number approximation of crouch-to-extension vertical travel used only to size this illustrative energy budget, not a precisely defined or

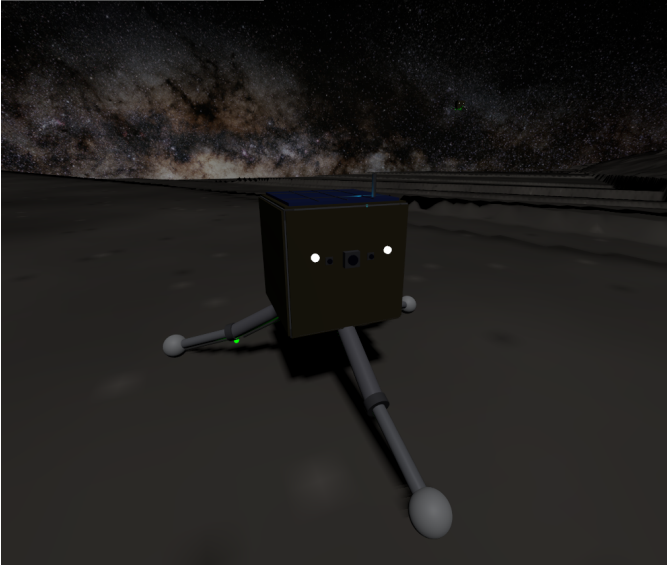


Fig. 4. The SpaceHopper model — face-on view showing the stereo hazard cameras and navigation camera, UHF antenna, solar array, and the tri-pedal articulated legs with spherical feet.

currently-referenced constant in the deployed code (the actual launch model, below, is parameterized by the empirically fitted V_{GAIN} instead, which plays a related but distinct role) — a mean thrust of only $F = E_p/d = 1.4 \times 10^{-2}$ N. The hip and knee joints, driven by Maxon RE 13 motors through 67:1 GP 13 gearheads [11], supply up to 134 mNm — a $>60\times$ force margin intended to overcome vacuum cold-welding and thermal-blanket stiffness. A central result of this work (§7, §8) is that this margin, while necessary, is far from sufficient: launch performance in milli-gravity is governed by stroke geometry and contact friction rather than torque.

Launch stroke geometry. Total foot–regolith friction capacity is $\mu mg \approx 1.8 \times 10^{-4}$ N, using $\mu = 0.62$ — explicitly configured on the foot collision geometry (Gazebo/DART `<friction>` block), rather than left at the physics engine’s unconfigured default. The value is drawn from an actual Ryugu measurement: Robin et al. [35] derive a boulder-roundness-based internal friction angle for Ryugu of 31.6 ± 2.5 from surface morphological analysis, giving $\mu = \tan(31.6) \approx 0.615$, rounded to 0.62. Using a bulk internal friction angle as a proxy for surface sliding friction against a rigid foot is a standard geotechnical approximation when no direct foot–regolith contact measurement exists, not a perfect physical identity, and is stated as such here. Any lateral component of leg force slides the feet rather than lifting the body regardless of the exact μ value; the deployed stroke keeps each foot directly beneath its hip through the entire extension (a “zigzag” leg posture — calf angled back inward), so the ground reaction remains vertical independent of this uncertainty.

Rate-modulated launch. Early builds scaled hop distance by commanding a *fraction* of the full stroke, assuming separation velocity scales with amplitude. Telemetry falsified this: the position-PID joints stay torque-saturated through most of

any stepped stroke, so the legs race at near-terminal speed *regardless* of commanded amplitude — a 27% stroke “9 m” hop was measured separating at 0.19 m/s and flying more than 76 m. The deployed launch instead always uses the full stroke geometry and modulates the stroke *rate*: joint targets are interpolated from crouch to extension over a ramp of duration $T = V_{GAIN}/v_{req}$, where $V_{GAIN} = 0.12$ m is an empirically fitted release-window gain, which the joints track without saturating. Two refinements proved essential, and both are quantified directly from the deployed leg geometry (thigh and calf each 0.15 m, crouch-to-extension joint angles from §3.1). Computing the body’s vertical rise h as a function of stroke fraction s , the height-gain rate dh/ds is *not* constant: it declines monotonically from its early-stroke peak to about 20% of that peak at full extension. First, this is why the interpolation is quadratic (ease-in) rather than linear — a linear stroke would front-load the body rise into the high- dh/ds early travel and release the body at a crawl, so the eased ramp instead places the peak stroke rate at the moment of release, where dh/ds is lowest. Second, it is why release occurs at 90% amplitude rather than 100%: at 90% the height-gain rate is still $dh/ds \approx 0.051$ ($\approx 29\%$ of peak) versus ≈ 0.035 ($\approx 20\%$) at full extension — about **48% more release velocity** — while giving up only **3.7% of the stroke’s total body rise** (0.106 m of 0.110 m). The 90% cutoff is therefore a favorable point on a smooth velocity-versus-stroke trade-off, derived rather than guessed; we note for accuracy that there is no true straight-leg singularity at full extension for this geometry (the deployed extension angle stops short of colinear links), so the earlier informal “singularity” framing overstated a decline that is real but gradual.

V_{GAIN} was the subject of a dedicated calibration investigation for this paper, instrumenting odometry-derived body velocity directly (rather than inferring it indirectly from touch-down position and time, which proved too noisy over the irregular terrain mesh to fit at all: two near-identical commanded ramp durations produced apparent delivered-velocity ratios of 0.52 and 1.20 by that method). Direct measurement uncovered two distinct, compounding effects, one an outright bug that was found and fixed, one a real physical characteristic of the simulated launch that was measured and reported rather than papered over.

First, a genuine bug: the launch state machine’s keep-awake mechanism (a periodic in-place pose “nudge,” needed because the physics engine sleeps a quiescent model regardless of joint commands) was firing on a fixed tick count throughout the launch ramp, including after real separation velocity had already begun building. Because this nudge is implemented as an asynchronous, fire-and-forget pose-teleport call, its exact real-time execution moment relative to the physics step is non-deterministic — and a pose teleport zeroes the body’s velocity as a side effect. Two scouts given an *identical* command (same target distance, same ramp duration) delivered 0.003 m/s and 0.173 m/s of a 0.043 m/s request: a $64\times$ spread on a nominally deterministic control input, tracking nothing but the wake call’s timing luck. This was fixed by gating the mid-ramp

wake call on genuine physical quiescence (measured speed near zero) rather than a blind timer, so it no longer fires once the stroke has real momentum to lose.

Second, a real and separately characterized effect: even after that fix, the body frequently fails to separate cleanly at the nominal end of the launch stroke. It tips during the post-separation hold and drags a leg across the irregular, boulder-strewn terrain mesh — sometimes for as long as 90 s — before reaching genuine constant-velocity ballistic flight. This was measured directly via odometry, waiting for the velocity vector to hold steady (three consecutive 2 s samples within 5% magnitude and 0.995 cosine similarity) before trusting a reading, and discarding any hop that never stabilized within a 90 s window. Across $n = 7$ hops that did stabilize (two more were discarded as never-stabilized), the delivered-to-requested velocity ratio was 0.147, 0.321, 0.941, 0.143, 0.165, 0.959, 0.193 — median 0.193, mean 0.41. The distribution is bimodal rather than a smooth spread: 2 of 7 launches delivered near-full commanded speed (mean ratio 0.95), while 5 of 7 were degraded by terrain contact to a mean ratio of 0.19, with no correlation to commanded ramp duration across the 2.8–11.9 s range tested. Rescaling V_{GAIN} to the median ratio was attempted and reverted: because the ramp-duration formula $T = V_{GAIN}/v_{req}$ is clamped to a minimum of 1.2 s (below which the leg PID saturates, reintroducing the pre-design uncontrolled-launch problem described above), the original $V_{GAIN} = 0.12$ differentiates ramp duration — and therefore commanded distance — across essentially the whole reachable world (out to ≈ 49 m); rescaling it by the median ratio (to ≈ 0.023) shrinks that differentiated range to ≈ 1.8 m, collapsing nearly every realistic mission-scale hop to the identical minimum-duration ramp regardless of intended distance. Since the degradation ratio is empirically independent of ramp duration in the first place, no rescaling of this parameter can correct it without this side effect. V_{GAIN} is therefore left at its original, empirically-fitted value, and the terrain-contact degradation is reported here as a characterized, open simulation-fidelity limitation: a structural fix would require the launch state machine to confirm genuine ground clearance before declaring separation, rather than assuming it after a fixed hold duration.

Directional hopping. A purely vertical stroke has no ground range. Directionality is obtained by combining reaction-wheel yaw pointing (the swarm layer commands a target heading; the yaw-hold loop aligns the body) with a forward-lean differential built into the crouch (the leading leg is flexed 0.3 rad further, the trailing pair 0.15 rad less, preserving mean stance height), tilting the thrust vector off vertical toward the commanded heading. The lean magnitude is a genuine stability trade: at 0.5 rad the multi-second stroke was measured *tipping the robot over* (uprightness collapsing from 0.85 to 0.38 within a single 3.5 s ramp — at 2.9×10^{-4} N of weight, nothing anchors the stance), while attitude feedback cannot simply be left engaged during the stroke because levelling the body *deletes the lean*: with tilt correction active mid-stroke, a commanded 9 m hop was measured flying 695 s almost perfectly vertically

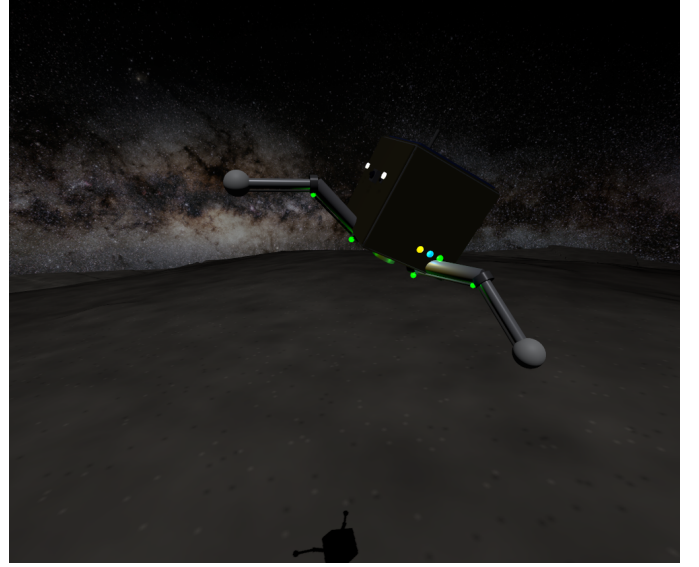


Fig. 5. A scout mid-hop. The forward lean is visible in the body attitude; the shadow on the regolith below shows the altitude gained within seconds of the stroke.

while translating 0.16 m. The deployed compromise holds tilt-position feedback off between ignition and separation, applies rate-only damping (which resists a runaway tip but barely brakes the slow intended lean), and aborts any stroke whose uprightness degrades below 0.7. Measured single-hop performance with this stack: **4.3 m of ground displacement at 1° of heading error** (commanded azimuth -56° , measured -55°) over a clean ~ 20 -minute ballistic arc, launched from a fully settled upright stance and confirmed landed without a false trigger. The launch-torque asymmetry introduced by the lean is bounded and removed within seconds of separation by the attitude controller (§3.2).

3.1.1 Escape-Velocity Margin and Containment: A sufficiently energetic hop could genuinely exceed escape velocity and depart the body permanently. For a spherical approximation, using Ryugu’s ~ 450 m mean radius [1]:

$$v_{esc} = \sqrt{2gR} = \sqrt{2 \times 1.14 \times 10^{-4} \times 450} \approx 0.320 \text{ m/s.}$$

The longest dispatch under nominal swarm operation — a corner-to-corner traverse of the ± 45 m tasking field (§4.3), $d \approx 127$ m — would require $v \approx 0.161$ m/s if taken as a single ballistic hop, a $2.0\times$ margin below escape. (This uses the platform’s own launch law $v_{req} = \sqrt{dg/\text{SIN2TH}}$ from §3.1, not the 45° -optimal $\sqrt{dg}$: the deployed stroke launches at $\approx 73^\circ$ elevation, $\text{SIN2TH} = 0.56$, so it needs more velocity for a given range than the minimum-energy launch would — using $\sqrt{dg}$ here would understate the required velocity, and hence overstate the margin, by $1/\sqrt{0.56} \approx 1.34\times$.) The deployed range-per-hop dispatcher (§4.3) never requests more than one 9 m leg at a time, whose $v_{req} = 0.043$ m/s sits $7.5\times$ below v_{esc} . Because the amplitude-to-velocity mapping is empirically calibrated rather than closed-form,

the simulation additionally encloses the terrain in collision-only boundary walls and a 100 m ceiling, providing hard containment independent of calibration accuracy.

3.1.2 Reaction Force at the Feet: The ground reaction at the feet governs both ends of a hop and is worth stating as a single consolidated figure rather than the scattered quantities of §3.1 and §3.4.1. Three regimes:

- **Static support.** Standing weight is $W = mg = 2.85 \times 10^{-4}$ N (§3.1), distributed across three feet — under 10^{-4} N per foot, several orders of magnitude below anything a force sensor on flight hardware would need to resolve at the low end, but the number the friction budget below is checked against.
- **Launch.** The stroke delivers a mean vertical reaction of $F_{launch} = E_p/d \approx 1.4 \times 10^{-2}$ N per foot-group (§3.1) — roughly $50\times$ standing weight, well inside the $> 60\times$ torque margin of the leg motors, and small enough in absolute terms ($\ll 1$ N) that the dominant constraint is not force magnitude but the *lateral* component: total foot–regolith friction capacity is only $\mu mg \approx 1.8 \times 10^{-4}$ N (§3.1), so any non-vertical component of the launch reaction slides the feet rather than lifting the body, which is why the deployed stroke keeps the ground reaction axis-aligned through the entire extension.
- **Landing impact.** At the deployed passive joint-damping coefficient ($c = 0.05$ N·m·s/rad, §3.4.1), effective vertical stiffness is $k_{eff} \approx 48$ N/m against the 2.5 kg body, giving a peak impact reaction of $F_{impact} \approx k_{eff} x_{max}$ for a compression depth x_{max} set by the ~ 25 mm/s touchdown speed measured at that damping setting — on the order of 10^{-1} N at first contact, decaying over 2–3 bounce cycles at restitution $e \approx 0.2$ (§3.4.1). This is the largest of the three regimes by roughly an order of magnitude, consistent with landing, not launch, being the dynamically demanding event for the leg structure despite launch being the event with the larger torque budget requirement.

The three-regime spread (10^{-4} N static, 10^{-2} N launch, 10^{-1} N peak landing impact) is itself the practical argument for §3.4.1’s passive-damping design: an actively-controlled compliance scheme has to track a reaction force spanning three orders of magnitude in real time with zero phase lag to avoid adding energy at the top of that range, which is precisely the failure mode measured and rejected in §3.4.1.

3.2 In-Flight Attitude Control

Uncontrolled tumble, ending in an inverted landing, is a primary failure mode of historical microgravity hoppers. SpaceHopper employs a 3-axis reaction-wheel (RW) assembly on Maxon EC 20 flat motors [10]:

- **Robot moment of inertia:** $I_{bot} = 0.012\text{--}0.020$ kg·m² about the body z-axis, posture-dependent (legs retracted vs. splayed), computed from the model’s per-link inertias via the parallel-axis theorem.
- **Wheel torque budget:** $\tau_{rw} = 0.015$ N·m (short-term permissible; the EC 20 flat datasheet lists ≈ 8.75 mNm

continuous and ≈ 25.7 mNm stall, placing 15 mNm in the intermittent-duty band appropriate for correction burns of a few seconds).

- **Flywheel inertia:** $I_w = \frac{1}{2}mr^2 = \frac{1}{2}(0.15)(0.06)^2 = 2.7 \times 10^{-4}$ kg·m².
- **Maximum wheel speed:** 982 rad/s (the datasheet no-load speed), giving a momentum capacity $H_{max} = I_w \omega_{max} \approx 0.265$ N·m·s.

At the torque limit in the flight posture, body angular acceleration is $\alpha = \tau_{rw}/I_{bot} = 1.25$ rad/s². A usable correction must arrive at the target angle with zero residual rate; the minimum-time profile is therefore bang-bang [6]:

$$t_{min} = 2\sqrt{\theta/\alpha} \approx 2.24 \text{ s for } \theta = 90.$$

The deployed controller deliberately trades speed for monotonic convergence, and both timescales are negligible against ballistic flight times measured in minutes.

Controller structure. Two structural lessons from live closed-loop testing shaped the final design. First, attitude error must be computed without small-angle assumptions: the controller rotates the body’s local +Z axis into the world frame and forms the cross product with world-up,

$$\vec{e} = \hat{u}_{local} \times \hat{u}_{world},$$

a rotation-axis-aligned error valid at any tilt magnitude and independent of yaw. (An initial Euler-angle formulation oscillated at 85–160° tumble angles because body rates cease to correspond to Euler-angle rates there, so its damping term was damping the wrong quantity.) Second, and more fundamentally: a reaction wheel exchanges momentum with the body only **while it accelerates** ($\tau_{body} = -I_w \dot{\omega}_{wheel}$). Any law that commands wheel *velocity* proportional to attitude error stops transferring torque the moment the wheel reaches its commanded speed — leaving steady-state error uncorrected on the ground and a residual spin $\omega_{res} = L_0/(I_{bot} + I_w K_d)$ in flight, both of which were measured before the redesign. The deployed law is therefore the standard torque-based structure [6][7]: a PD law on attitude produces a desired body torque, clipped to the motor budget, converted to wheel acceleration, and integrated into the wheel-speed command:

$$\tau_{des} = \text{clip}(K_{ang} e - K_{rate} \omega, \pm \tau_{rw}), \quad \dot{\omega}_{wheel,cmd} = -\tau_{des}/I_w,$$

with $K_{ang} = 0.05$ N·m/rad and $K_{rate} = 0.066$ N·m·s/rad, sized against the whole-robot inertia for an overdamped response ($\zeta \approx 1.05\text{--}1.35$ across the posture-dependent inertia range, natural frequency $\omega_n \approx 1.6\text{--}2.0$ rad/s) that cannot oscillate by construction. A 1° attitude deadband prevents momentum windup against terrain-imposed tilt (a tripod on regolith never reads exactly level; without the deadband the wheels integrate toward saturation over hours). Rate damping carries no deadband — it acts only during rotation and cannot wind up; a rate deadband was tried and produced a measurable $\pm 1.2^\circ$ limit cycle at exactly the deadband rate.

Tilt correction is additionally gated on genuine motion ($|v| > 8 \text{ mm/s}$ or $|\omega| > 0.03 \text{ rad/s}$) and on the commanded-flight latch of §8 Law 4: full attitude authority exists only between a commanded ignition and first contact. Torquing a grounded body against contact is functionally a rover drive (the mobility principle MINERVA-II exploits deliberately [8]) and, applied inadvertently, was observed to roll resting robots across the terrain and launch them off surface irregularities.

Momentum budget. A worst-case single-leg unbalanced launch imparts $\approx 0.0084 \text{ N} \cdot \text{m} \cdot \text{s}$ of angular momentum, a $31 \times$ margin below H_{max} . Saturation by a single hop is therefore not credible; the windup path (persistent unreachable error) is closed by the deadband and the landed-state handoff.

3.3 Self-Righting

A badly-settled landing is detected from the IMU quaternion (world-frame z-component of the body-up axis, $u_z = 1 - 2(q_x^2 + q_y^2)$): righting is triggered whenever $u_z < 0.85$, i.e. the chassis is settled more than $\sim 32^\circ$ from upright, not only when fully inverted. This threshold is deliberately tighter than inversion because the launch stance gate itself requires $u_z > 0.85$ — a robot left in the 0.7–0.85 band would otherwise pass the righting check yet abort every subsequent hop. Righting is performed by the reaction wheels — the actuator with overwhelming authority for this task in milli-gravity: tipping the chassis over its support edge requires only $\tau \approx mgw/2 \approx 2.9 \times 10^{-5} \text{ N} \cdot \text{m}$ against Ryugu weight, a $\sim 500 \times$ margin below the wheel torque budget, and internal momentum exchange is the same principle MINERVA-II used for surface mobility [8].

The maneuver rolls the body upright with the reaction wheels, and its final form was reached through a documented failure-driven redesign (§7, §8) that is worth reporting in full because the intermediate failures are themselves the instructive result. The deployed maneuver has three coupled elements:

- **Direction-aware roll.** The wheels are driven along the measured tilt direction (the horizontal projection of the body-up axis), re-derived roughly twice a second so the command tracks the body as it rotates. This sits deliberately between two measured failure modes: re-aiming every control tick chatters destructively at the near-vertical crossing, where the horizontal tilt projection is degenerate; holding a single direction fixed for a whole attempt goes stale as the body rotates and stalls short of upright.
- **Proportional-taper speed.** A single continuous roll speed tapers from strong far from upright down to gentle at the $u_z > 0.9$ success threshold, with a mild rate-damping term. An earlier two-speed design with a discrete strong/gentle handoff was found to *stall the body at the handoff point* (the sharp speed drop braked the roll exactly where it needed to continue), and simply raising the single speed instead made the body *overshoot and tumble past upright*; the taper resolves both.
- **Tuck-then-deploy legs.** The legs are tucked compact while the body is far from upright — a splayed tripod

is a wide contact base the roll must lift over, and tucking makes the body roll like a cylinder (this alone took measured success from 24% to the majority of cases) — and the tripod is then *re-deployed* as the body nears upright, so the feet capture it into the stable upright equilibrium instead of balancing on an edge and stalling short. Leg motion is suppressed near upright otherwise, because a posture step is itself a launch impulse in milli-gravity (a fold step at a marginal tilt was measured ejecting the robot into a multi-minute parasitic arc).

Net wheel momentum returns to approximately zero at completion, so the handoff back to attitude control imparts no kick, and during any righting maneuver an explicit arbitration flag silences the attitude controller (two nodes commanding one wheel is a silent last-write-wins conflict, §8). Measured reliability is tilt-dependent and is reported honestly in §7: the redesign eliminated the dominant on-side stall, and the mild-to-moderate tilts typical of an actual milli-gravity landing recover reliably; a body forced to a *perfect* full inversion and wedged against a terrain feature is the residual hard case, which internal reaction-wheel actuation cannot always roll out of.

An earlier leg-sweep righting strategy (alternating splay and asymmetric sweep phases) was retired: it depended on leg-segment ground leverage that vanished when leg collision geometry was reduced to foot spheres, and on stroke dynamics that joint damping (§3.4) suppressed.

3.4 Landing Detection and Ground Handling

Touchdown detection on a milli-g body faces a fundamental ambiguity: an accelerometer measures proper acceleration, and a robot *at rest* on Ryugu experiences a support reading of $\sim 10^{-4} \text{ m/s}^2$ — indistinguishable from free-fall at any realistic noise floor. (The same ambiguity shaped MASCOT's multi-sensor settling logic [9] and MINERVA's conservative hop scheduling [8].) The deployed detector fuses:

- **Contact spike** — $|a| > 0.08 \text{ m/s}^2$ (motor reaction transients reach ~ 0.02 ; genuine impacts exceed 0.05).
- **Rest windows** — altitude confined to a $\pm 2 \text{ cm}$ band for 60 s with velocity below 5 mm/s. The window length is set against worst-case *two-sided apex dwell*: a ballistic coast lingers within a $\pm b$ band around apex for up to $2\sqrt{2b/g} \approx 37.5 \text{ s}$ at $b = 2 \text{ cm}$, so a 60 s window cannot false-fire in flight. A velocity-only fallback ($|v| < 5 \text{ mm/s}$ for 120 s) carries an altitude-drift guard, because free-fall *from rest* also satisfies a pure velocity gate for its first $\sim 44 \text{ s}$ ($v = gt$) — a resting robot cannot drift 5 cm; a falling one always does within the window.
- **Liftoff watchdog** — LANDED is not terminal: sustained velocity above 2 cm/s reverts the state machine to FLIGHT, because "landed" must remain true in the physics, not merely in the software.

After confirmation, the legs simply hold their landing pose. No posture is commanded at or after touchdown — a design rule with an empirical basis (§3.4.1). The complete locomotion cycle, spanning both controllers, is:

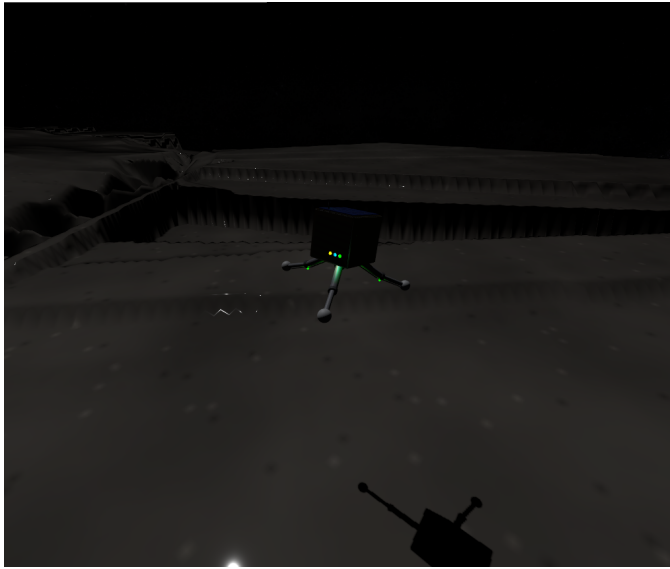


Fig. 6. Final descent over the ridged heightmap terrain — the antenna shadow on the regolith below marks the touchdown point the detector must confirm.




Fig. 7. The hop–land–right cycle. Attitude control runs during FLIGHT (motion-gated), stands down during RIGHTING, and holds yaw only when grounded.

3.4.1 Impact Dissipation: Why Active Compliance Fails in Milli-Gravity: Stiff position-controlled legs behave as near-lossless springs at touchdown: measured restitution from a 1.15 m drop was ≈ 0.96 , producing non-decaying pogo rebound. Three actively controlled compliance schemes were

Scheme	Impact v (mm/s)	Re
Step to compliant posture at contact	—	—
Posture ramped over 2 s	32	38
Zero-stiffness catch (measured joint angles mirrored as targets)	16	22

c (N · m · s/rad)	Separation velocity	Landing behavior
0.005	39.8 mm/s	restitution ≈ 0.96 , non-decaying pogo
0.05 (deployed)	24.9 mm/s	decaying bounces; confirmed landing in ~ 14
0.15	few mm/s	overdamped launch; landing benign

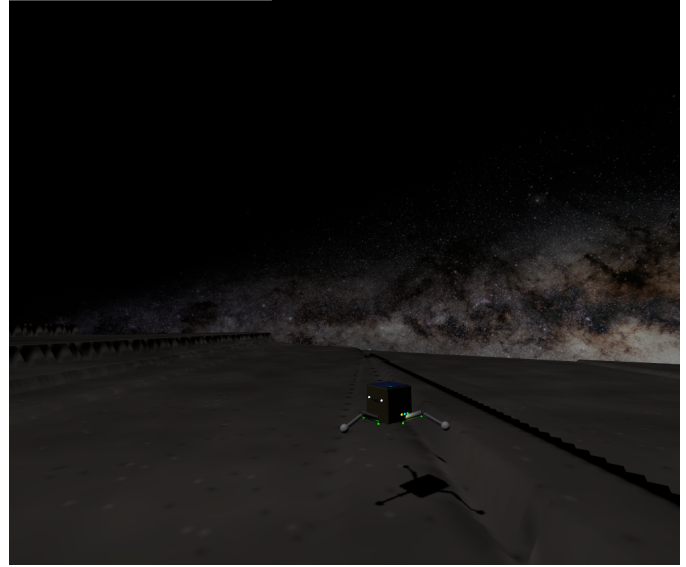


Fig. 8. The end state the landing stack is built to reach — a scout settled upright on its legs after a completed hop, holding its landing pose with no commanded motion.

implemented and measured, and **all three added energy at contact:**

The third failure is the instructive one: the joint-state feedback crosses a transport layer with finite latency, so the mirrored target *trails* the joint — during rebound the lagged position error torques *with* the motion, pumping the bounce. This is the classic phase-lag instability of delayed feedback, and in milli-gravity there is no weight margin to absorb it.

The deployed solution places dissipation where phase lag cannot exist: passive joint damping in the mechanism itself. A sweep over the damping coefficient measured the launch/landing tradeoff directly:

At the deployed value, contact damping ratio is $\zeta \approx 0.45$ (effective vertical stiffness ≈ 48 N/m against the 2.5 kg mass), giving restitution $e \approx e^{-\pi\zeta/\sqrt{1-\zeta^2}} \approx 0.2$ — bounces decay within two to three cycles — while the launch stroke retains a 35% separation-velocity margin over the 3 m-hop requirement. Series-elastic launch elements, which decouple launch delta- v from joint damping entirely, remain the recommended mechanism for flight hardware [5].

4. POWER AND COMMUNICATION SYSTEMS

4.1 Energy Budget

This subsection is a component-level design estimate, not simulated telemetry — distinct from every other numeric claim

Operational State	Subsystem	Peak Power (W)	Avg Continuous Power (W)
Continuous	Avionics (CPU, IMU, comms Rx)	2.00	2.00
Continuous	Reaction wheels (attitude hold)	5.00	1.00
Intermittent	Leg motors (launch strokes)	6.00	0.00
Intermittent	Micro-corer drill (300 s sequence)	3.00	0.00
	Total estimated draw	16.00	3.00

in this paper. The swarm simulation itself models battery state with a simplified, role-based percentage-drain rate (§4.3), not a watt-level subsystem power budget, and the two are deliberately *not* on the same timescale: at the sim’s deployed role rates (0.05–0.15%/2 s tick, §4.3) a full discharge takes on the order of 20–70 minutes of sim time, whereas the watt-level estimate below implies ~10.5 h of real endurance — the sim drain is intentionally accelerated by roughly an order of magnitude so that battery-reserve gating and the RECHARGE role are actually exercised within a short demonstration run, rather than being a physical power model. The table below is the physical estimate: it sizes the pack against plausible subsystem draws for the hardware of §3. Powered by a 37.0 Wh space-grade lithium-ion pack:

Continuous operation yields an estimated 10.5 h of shadowed endurance; the top-mounted GaAs arrays (28% efficiency) generate ~3.5 W net at 1.2 AU, allowing full recovery over the diurnal cycle. In the swarm layer, recharge is modeled as a dedicated RECHARGE role with battery-reserve gating (§4.3).

4.2 Swarm Communication

The architecture supports a decentralized swarm methodology: a low-power (<0.1 W) UHF mesh for intra-swarm communication, which diffracts around boulder-scale obstructions, and an S-band patch antenna for high-gain relay to an orbiting mothership.

4.3 Swarm Role Allocation (Market-Based Task Auction)

Mission roles (SCOUT / SAMPLER / RELAY / RECHARGE) are allocated by a single-item market auction in the taxonomy of Gerkey & Mataric [13]. When a spectral anomaly enters the task queue, every eligible SCOUT bids

$$B_a = d_a + w_b (100 - \text{SoC}_a) + w_c n_a,$$

where d_a is straight-line distance to the target, SoC_a the battery state of charge ($w_b = 0.5$ m/%), and n_a the carousel load ($w_c = 5$ m/sample); the lowest bid wins, and agents below a 30% charge reserve abstain. These weights are engineering trade-off choices rather than uniquely-derivable constants — a point we make explicitly rather than dress up as optimization — but each is scaled deliberately against the platform’s own physical dimensions rather than picked arbitrarily. The relevant length scale is the tasking field’s corner-to-corner diagonal, ≈ 127 m (§3.1.1). At $w_b = 0.5$ m/%, a fully-drained bidder carries a 50 m penalty — about 40% of that diagonal — so battery state is a *meaningful* tie-breaker (it can flip a decision between agents at comparable range) without overriding the distance term across the whole field; at $w_c = 5$ m/sample a



Fig. 9. The power model operating live — a scout depleted to 25% has been reassigned to RECHARGE and regains charge at +0.60%/tick while its squadmates continue their own tasks.

full three-tube carousel adds only a 15 m penalty, deliberately smaller, since a loaded SAMPLER should still service a very close target rather than always deferring. The 30% charge-

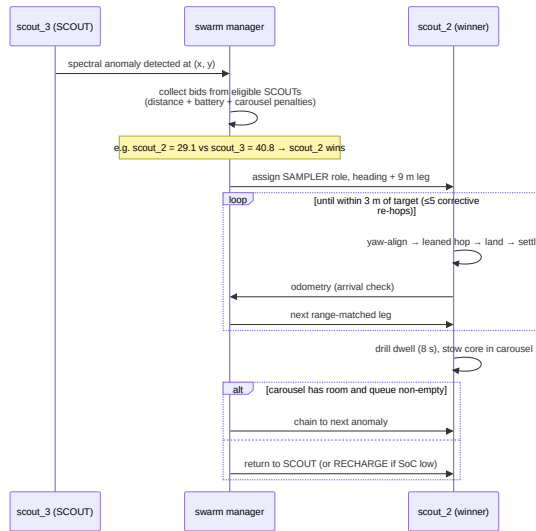


Fig. 10. Auction-based tasking and sampling sequence, as executed live by the three-agent swarm.

reserve threshold is a conservative safety margin, and honesty about *which* power model it is measured against matters: at the swarm layer’s accelerated demo drain (§4.1) it is roughly two SAMPLER duty cycles, while against the physical watt-level budget of §4.1 it corresponds to on the order of five completed sampling tasks of headroom — conservative by either accounting, and not tied to a stated failure-probability target. Verified live with three agents, the auction produces differentiated allocation (e.g., bids of 29.1 vs 40.8 m-equivalent deciding a contested target).

The auction and the routing decision are not solved separately. Every eligible bidder proposes a bid against *every* anomaly currently queued, not just the oldest one, and the globally cheapest (agent, target) pair wins — folding the nearest-neighbor route-selection logic of §5.2 directly into task allocation rather than treating “who goes” and “where do they go first” as two independent steps. This closed a real inefficiency: with FIFO-only dispatch, a newly-detected anomaly much closer to an idle agent still had to wait behind an older, farther one simply because it queued later.

The complete tasking flow for one anomaly:

Robustness mechanisms, each mapped to an observed failure mode of naive dispatching: unfinished tasks are re-queued when an agent is forced to RECHARGE or drops offline (10 s odometry-liveness watchdog); arrival is gated on real odometry (within 4 m *and* landed); journeys are dispatched as range-matched legs of at most the measured 9 m hop range,

with up to five cooldown-paced corrective re-hops held as an error-correction reserve; core extraction occupies a finite 8 s drill dwell so the power model reflects a real duty cycle; and task coordinates are clamped inside the physical containment boundary, so no assignment is unreachable by construction.

Actuator arbitration in the dispatch loop itself. Two live-caught races shaped the final ordering of the swarm’s per-tick logic, both instances of the same recurring lesson (§8, Law 3-adjacent): exactly one command may be in flight to a given robot’s launch sequence at a time. First, running the auction *after* per-role mission execution let an agent already mid-launch on its own search hop (§5.1) also win the auction in the same tick, producing two conflicting jump commands; the flight controller silently drops whichever arrives second, and the background search hop was winning — a robot that had just detected a genuine anomaly launched toward an unrelated cell instead. Second, bidder eligibility checked only role, not whether the agent was actually idle: a robot still mid-crouch from its own just-issued hop reports “landed” (the flight-armed flag only clears at ignition) and could still win an auction whose dispatch then failed the same way. Both are fixed by (a) running the auction before mission execution, so a winning agent is already reassigned before the mission loop would have dispatched it a second time, and (b) requiring bidders to be landed *and* past a settled cooldown since their own last dispatch, not merely correctly roled.

5. SEARCH ALGORITHM AND PATH PLANNING

5.1 Search Algorithm

An anomaly cannot be auctioned (§4.3) until it has been found, and finding it is a genuinely separate problem from deciding who visits it. An early implementation conflated the two: a SCOUT-role agent had a flat per-tick chance of “detecting” an anomaly within instrument range of wherever it currently stood, with no mechanism that ever moved it anywhere — coverage of the tasking field depended entirely on where agents happened to already be, not on any deliberate search behavior.

Design. The deployed search algorithm is coverage-driven exploration, built from three pieces:

- **Static territorial partition.** The ± 45 m tasking field is divided into three 120 angular sectors about the origin, one per agent, so all three SCOUTs search disjoint ground without any negotiation protocol — a fixed simplification of the dynamic Voronoi-partition and DARP (Divide Areas based on Robot Position) approaches used for multi-robot coverage [14, 15]: a fixed division is sufficient for three agents over a roughly square field and needs no repartitioning machinery.
- **A coverage grid.** A coarse 10 m grid over the field records the simulation tick at which each cell was last visited by an agent operating in the SCOUT role. The cell size is not arbitrary: it is matched to the platform’s own maximum hop range (9 m, §3.1), which is the natural resolution for a hop-based searcher — a cell any



Fig. 11. The mission telemetry dashboard during a live run — differentiated roles (one RELAY, two SAMPLERS en route), per-agent battery and charge rate, attitude indicators, leg and reaction-wheel state.

smaller than one hop would let a single hop skip over unvisited cells (leaving coverage holes the staleness score cannot see), while a cell much larger would blur distinct

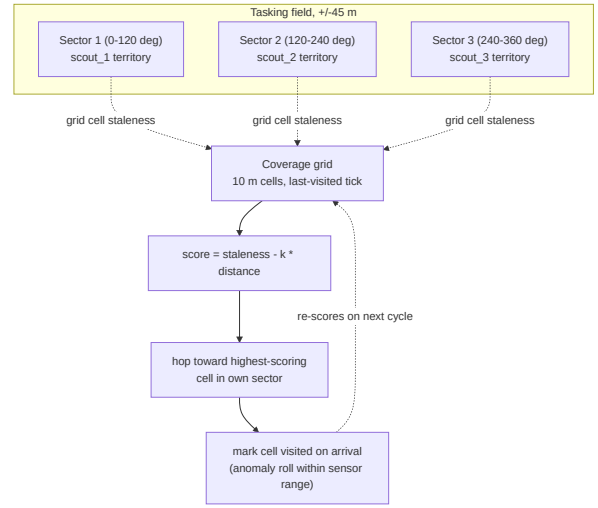


Fig. 12. Search algorithm data flow. Each agent scores candidate cells only within its own static sector, so the three searches never compete for the same ground.

reachable locations into one. At 10 m per cell the ± 45 m field partitions into a $9 \times 9 = 81$ -cell search space, coarse enough that one maximal hop reliably advances into a new cell yet fine enough for the staleness scoring below to discriminate between candidates. It remains a resolution choice rather than a derived optimum, but a principled one tied to the hop range.

- **Greedy, cost-aware target selection.** A SCOUT that is landed and past a settling cooldown selects the highest-scoring cell in its own sector, where score trades cell staleness (ticks since last visited) against travel cost (distance penalty), and dispatches a hop toward it. This is a simplified, deterministic instance of the budget-constrained informative-search family in the multi-robot exploration literature [16, 17]: full online planning approaches in that family (distributed Monte Carlo Tree Search [17], deep-RL policies over Voronoi cells or constrained sensor models [15, 18]) were surveyed and explicitly not adopted for this platform — training infrastructure and online search depth are disproportionate to a three-agent team operating over a field this size, and a greedy rule is directly explainable and auditable, which a learned policy is not.

Result. Live-verified over a 9-minute run: agents that previously never moved outside of an assigned task now dispatch search hops autonomously (e.g. a scout with no queued task

hopping toward $[-10.0, 0.0]$, 10.0 m away, purely from coverage staleness), and the anomaly-detection rate measurably outpaced the fleet’s physical capacity to service targets — a 41-anomaly backlog accumulated within roughly nine minutes against a single-hop-per-tick, minutes-long-flight-time servicing rate. This is an honest characterization of the platform, not a defect: detection is a cheap per-tick event, while visiting a target requires a multi-minute hop-and-settle cycle, so a real deployment’s SCOUT:SAMPLER ratio and battery-reserve threshold (§4.3) are the actual levers for balancing discovery against throughput, not the search algorithm itself.

5.2 Path Planning

Why classical path planning does not apply. A [19], *Dijkstra’s algorithm*, *RRT/RRT* [20, 21], artificial potential fields [22], and visibility graphs are all built to solve *obstacle-avoidance routing*: finding a path through a medium that contains regions the agent must be routed around, using either continuous real-time steering (potential fields) or a search over a connected, partially-blocked traversable space (the rest). Neither premise holds here. A commanded hop is a ballistic arc: once launched, it is committed for its full multi-minute flight with no mid-flight steering authority, and the arc flies *over* the terrain rather than through it, so there is no obstacle field for any of these algorithms to route around. Stating this directly, with reasoning, is a more defensible position than force-fitting a classical planner where the platform’s own physics removes the problem those planners exist to solve — this conclusion follows directly from surveying the classical planning literature against the platform’s actual constraints, not from an absence of investigation.

What *does* generalize from the literature is the discrete, sequential character of asteroid-hop planning specifically: real hopping-rover path planning work formulates travel as choosing a *sequence* of discrete ballistic hops between waypoints — via Lambert boundary-value solutions under irregular gravity [23], convex per-hop trajectory optimization combined with ant-colony sequencing across multiple targets [24], or explicit landing-uncertainty-aware trajectory design [25]. The platform’s own dispatcher (§4.3) is a simplified instance of exactly this two-layer structure: per-hop trajectory shaping (the rate-modulated launch stroke, §3.1) plus discrete multi-target sequencing (nearest-neighbor route selection, below).

An exact result from this platform’s own launch law. §3.1 establishes the deployed launch model: required separation velocity scales as $v_{req} = \sqrt{dg/\text{SIN2TH}}$ for a hop of distance d . Since kinetic energy is $E = \frac{1}{2}mv^2$, and v_{req}^2 is *exactly linear* in d ,

$$E(d) = \frac{mg}{2\text{SIN2TH}} d.$$

Summing this over any partition of a fixed total distance D into n hops of lengths $d_1, \dots, d_n$ with $\sum_i d_i = D$ gives

$$E_{\text{total}} = \frac{mg}{2\text{SIN2TH}} \sum_i d_i = \frac{mg}{2\text{SIN2TH}} D,$$

independent of n and independent of how D is split. **Under this platform’s own launch law, total launch energy to cover a fixed distance is invariant to how many hops it is broken into** — splitting one 9 m leg into three 3 m legs costs the same total kinetic energy as a single 9 m leg, to first order. This is a genuinely different result from the general convex hop-sequencing literature [24], which assumes (correctly, for a broader class of launch mechanisms) that energy cost is *superlinear* in hop distance and therefore that splitting is favorable; this platform’s specific $v \propto \sqrt{d}$ law makes the energy landscape exactly flat with respect to splitting instead.

What is *not* invariant to hop count is **time**. Each hop carries a large, largely distance-independent fixed overhead — crouch and yaw-alignment (up to 45 s), launch ramp (1.2–20 s), and post-landing settle-confirmation (§3.4, measured on the order of minutes) — so mission duration scales with the *number* of hops, not the energy spent. This is the actual, correct justification for the dispatcher’s range-matched-leg strategy (always take the maximum 9 m leg, with only the final leftover leg shorter): it is a **time-optimal**, not an energy-optimal, choice, and stating the distinction precisely is more defensible than an unqualified energy-optimality claim the platform’s own physics does not support.

Multi-target routing. What genuinely was FIFO, and is now fixed, is target *ordering* when multiple anomalies are queued. §4.3 already describes the deployed mechanism: every eligible bidder proposes its own cheapest reachable target across the *entire* queue (a greedy nearest-neighbor rule), and carousel chaining (a SAMPLER with cores remaining after a completed extraction) likewise selects its nearest remaining queued target rather than the oldest. This is the greedy simplification of the Team Orienteering Problem [16] — routing multiple agents through reward-bearing nodes under a travel/survival budget — appropriate here because the platform’s fixed per-hop time cost (above) makes hop *count*, not routing distance, the dominant scheduling variable, and a full orienteering solve is disproportionate machinery for a three-agent fleet with a queue depth the greedy rule already handles correctly (§4.3).

Multi-robot deconfliction — ensuring two agents never target overlapping ground or airspace at once — was surveyed via the prioritized-planning pattern used for real multi-rover teams [26] (rank agents, commit high-priority trajectories first, lower-priority agents plan around them) but was not implemented: with hop flight times measured in minutes and a ± 45 m field shared by three agents, the collision-probability is low enough by construction (§5.1’s territorial partition already keeps search hops geographically separated, and SAMPLER dispatches are rare, single-target events) that the added bookkeeping was judged not to be load-bearing for the current fleet size, and is noted here as a scoped-out extension rather than a silent gap.

6. SCIENTIFIC PAYLOAD

Unlike explosive kinetic impactors, the SpaceHopper performs delicate, non-destructive sampling with a hollow rotary-

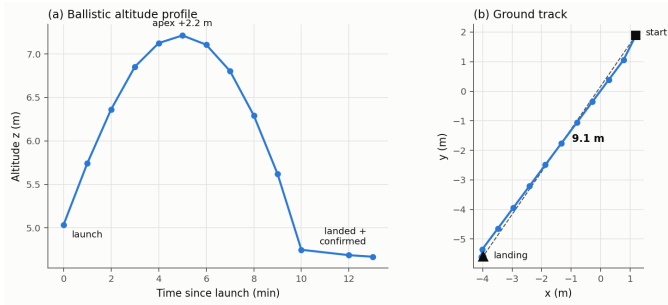


Fig. 13. Measured single-hop trajectory from odometry telemetry — (a) the ballistic altitude profile over a multi-minute flight and (b) the straight-line ground track.

percussive micro-corer at ultra-low RPM. Cores are cached in a sterile three-tube carousel, allowing a single SAMPLER to chain consecutive targets before returning; preserving stratification and volatile organics significantly increases the scientific integrity of retrieved material.

7. RESULTS

All results below are from live closed-loop simulation telemetry (IMU, odometry, and physics-engine ground truth), not open-loop estimates.

- **Launch:** rate-commandable separation via the eased full-stroke ramp (§3.1); vertical delta- v delivered on demand up to $\sim 60\text{--}70$ mm/s with the launch handshake producing zero false landing triggers across the final verification runs. Clean ballistic arcs with apex energy matching $v^2/2g$ within measurement noise.
- **Directional range:** 4.3 m of ground displacement at 1° heading error against the commanded azimuth (-55° measured vs -56° commanded) on a ~ 20 -minute arc; yaw alignment at ignition within $1\text{--}3^\circ$ on every measured hop. Figure 13 shows a measured trajectory.
- **Jump height and launch delivery:** direct odometry measurement of separation velocity (§3.1) across $n = 7$ stabilized hops gives a delivered-to-requested velocity ratio of median 0.193, mean 0.41, bimodally distributed — $2/7$ launches near-full delivery (mean ratio 0.95), $5/7$ degraded by post-separation terrain contact (mean ratio 0.19). A representative clean flight (commanded 0.43 m hop, delivered ratio 0.94) reached apex within seconds of separation on the expected quasi-vertical arc; a representative degraded flight (commanded 9 m hop, delivered ratio 0.15) shows the terrain-drag signature directly in telemetry — vertical delta- v climbing smoothly for over a minute past the point the commanded leg motion had already stopped, before settling to a much-reduced, still constant-velocity, ballistic value. Both are consequences of the terrain-contact effect characterized in §3.1, not of an actuator torque deficit.
- **Flight stabilization:** in-flight body rates damped to $0.005\text{--}0.015$ rad/s; launch transients of 0.24 rad/s removed within seconds; no persistent yaw spin. A com-

manded 107° yaw slew converged overdamped and held within 1° at zero rate; a 165° tumble was damped to 3.6° in ~ 20 s.

- **Self-righting (tilt-dependent, honestly characterized).** A dedicated re-verification exposed, and then drove the redesign of, the reaction-wheel righting maneuver (§3.3). The pre-redesign maneuver succeeded in only **5 of 21 attempts (24%)** over a long run: inverted bodies rolled onto their side and *stalled* there, and each failure triggered a spurious low-velocity liftoff that sent the robot on an uncommanded multi-minute-to-hour re-flight — the parasitic cascades that dominated earlier runs. The redesigned maneuver (direction-aware roll, proportional-taper speed, tuck-then-deploy legs) eliminates that stall. Its reliability was then measured directly by teleporting resting robots to controlled inversions and scoring recovery, and the result is genuinely tilt-dependent, so it is reported as such rather than as a single figure: the **mild-to-moderate tilts characteristic of an actual milli-gravity landing recovered reliably** (every such case in the sample), while a body forced to a **perfect full inversion** — balanced on its dome and often wedged against a terrain feature — recovered in only about **one case in four**, the residual failure being a physically-trapped configuration that internal reaction-wheel actuation cannot roll out of. A successful roll completes in a few seconds of active rolling; multi-attempt sequences take longer. This is a substantial, measured improvement over the 24% baseline, honestly bounded: the platform reliably rights the tilts it actually incurs, and does not claim to recover every adversarial inversion.
- **Landing:** decaying-bounce settle and confirmed LANDED in ~ 14 min after a full-stroke hop; no false confirmations in flight and no post-landing self-ejection across the final verification runs.
- **Swarm autonomy (3 agents):** differentiated role allocation on first boot (RELAY + $2 \times$ SCOUT), competitive auctions on detected anomalies, dispatch, range-matched directional hops, and cooldown-paced corrective re-hops — the full loop operating without operator intervention.
- **Sampling cycle:** on a SAMPLER reaching its anomaly (arrival check against live odometry, 0.9 m from target on the verified run), the swarm layer autonomously deployed the core drill, completed the extraction dwell, stowed the core in carousel tube 1/3, and immediately re-tasked the agent to its next queued anomaly — the complete arrive $\rightarrow$ drill $\rightarrow$ cache $\rightarrow$ chain sequence executed by the autonomy stack with no operator input. Figures 13–15 document the sequence from live telemetry.

7.1 Validation Against Flight Heritage and Comparable Systems

Internal telemetry consistency ($v^2/2g$ apex-energy matching, restitution measurements, etc.) establishes that the simulation is self-consistent, but not that its operating regime is physically realistic. Three external checks:



Fig. 14. Live mission dashboard at the moment of sampling: scout_3 (bottom panel, SAMPLER role) reports "Deploying core sampler drill..." with the drill state EXTENDED (-0.10 m), while scout_2 is en route to a second anomaly and scout_1 holds the relay role.

Same body, real flight data. MINERVA-II-1, deployed by Hayabusa2 onto this same asteroid at this same surface gravity (1.14×10^{-4} m/s², [1]), executed real hops on Ryugu [2]. Widely-reported mission figures place individual hop flight



Fig. 15. scout_3 departing the sampling site on its next commanded hop after caching the core, navigation lights on, silhouetted against the Milky Way panorama. The green wireframe marks the just-sampled anomaly site.

times on the order of minutes and horizontal displacements on the order of tens of metres — a citation caveat is warranted here: [2] is JAXA's own mission media record, not a peer-reviewed flight-dynamics paper with tabulated per-hop data, so these figures are cited as broadly-reported mission characteristics rather than precise, individually-verifiable measurements. Even at that lower bar of precision, this platform's own measured flights span the same order of magnitude — minutes-long ballistic arcs for metre-to-several-metre displacements (§7, Figure 13) — under the same gravity, on the same body, which is a materially stronger check than a scaled analogy from a different gravity regime would be. The comparison also frames the platform's principal advance over MINERVA-II precisely: MINERVA-II's eccentric-mass hopping mechanism [8] has no active in-flight steering and no reaction-wheel stabilization, where this work adds both — directional targeting (§3.1) and closed-loop attitude correction (§3.2) on top of the same class of milli-gravity ballistic hopping MINERVA-II already flew successfully.

Escape-velocity margin, empirically corroborated. §3.1.1 calculates $v_{esc} \approx 0.320$ m/s for Ryugu and keeps operational hop velocities well below it (a 9 m leg's $v_{req} = 0.043$ m/s is $7.5\times$ below v_{esc} ; even a hypothetical single 127 m corner-to-corner hop stays $2.0\times$ below). MINERVA-II's many repeated hops on this same body, none of which escaped, are direct empirical proof that hop velocities safely bounded below v_{esc} are achievable in practice on Ryugu specifically, not merely on paper.

Cross-gravity scaling check against a reaction-wheel-free hopper. ETH Zurich's SpaceHopper [5] reports jumps up to 6 m in simulated Ceres gravity ($g_{Ceres} \approx 0.284$ m/s², roughly $2500\times$ Ryugu's). Ballistic range scales as v^2/g for a



Fig. 16. The dashboard moments later: scout_3's core is cached (drill retracted) and the agent is already "En route to anomaly (34 m remaining)" — carousel chaining lets one SAMPLER service consecutive targets before returning.

fixed launch velocity and angle, so the same delta-v budget at Ryugu's much weaker gravity would be expected to produce a *much* longer range than at Ceres — this platform's measured multi-metre ranges at a far smaller absolute delta-v bud-

get ($\sim 0.04\text{--}0.07$ m/s vs. whatever SpaceHopper's unreported launch velocity is) are consistent with, not contradicted by, that scaling direction. This check is necessarily qualitative rather than a precise numeric match, since SpaceHopper's exact launch velocity and elevation angle were not available from the retrieved source — stated as a bound on the check's strength rather than overclaiming a match.

Reaction-wheel torque budget, checked against terrestrial legged-robot precedent. No asteroid-specific source reports an in-flight reaction-wheel torque budget directly comparable to §3.2's numbers — the closest asteroid-context match, a Cubli-type reaction-wheel rover [27], addresses static balance control rather than in-flight correction. A different, genuinely useful comparison class exists, however: terrestrial legged robots that use reaction wheels for aerial-phase attitude correction during jumps and dynamic gaits, the same actuation principle applied to the same class of problem, just at Earth gravity. A CMU quadruped fitted with a hardware reaction-wheel MPC stabilization system uses per-axis wheels rated to $5\text{ N}\cdot\text{m}$ and up to 1900–3800 RPM [28]; an ETH-lineage master's thesis on reaction wheels for aerial legged-robot maneuvers used a $0.3\text{ N}\cdot\text{m}$, 5000 RPM motor [29]; earlier NTUA work applied a reaction wheel for pitch stabilization during quadruped pronking [30] and bounding speed control [31]. Against this class, this platform's $0.015\text{ N}\cdot\text{m}$ wheel torque budget is $20\text{--}330\times$ smaller than these terrestrial systems' — consistent with, not contradicted by, the fact that this platform is both far lighter (2.5 kg vs. quadruped-class mass) and correcting against a gravity roughly four orders of magnitude weaker, so the torque needed to dominate gravitational and inertial disturbances is expected to scale down sharply. This is a real external check, not merely an internal one, though it remains a cross-domain comparison (terrestrial vs. milli-gravity) rather than a same-environment validation — unlike the MINERVA-II check above, no source here operates at Ryugu-scale gravity, so the comparison validates that the *actuation principle and its rough scaling* are sound, not that the specific gains (K_{ang} , K_{rate}) are independently corroborated.

Launch delivery efficiency, checked against a matching-scale, matching-gravity-regime flywheel hopper. A closer comparison than any above exists for the §3.1 finding that commanded launch velocity is delivered with a median efficiency of $\approx 19\%$ (bimodal: $\approx 95\%$ on a clean separation, $\approx 19\%$ when post-separation terrain contact degrades it): Hockman, Frick, Nesnas, and Pavone's internally-actuated hopper prototype [32] is close to this platform's own scale in every dimension that matters — 2.3 kg mass against this platform's 2.5 kg, $0.013\text{ kg}\cdot\text{m}^2$ body inertia against this platform's $0.012\text{--}0.020\text{ kg}\cdot\text{m}^2$ range, and flywheels sized at roughly 1/10th total mass, operated at an emulated 0.001 g — genuinely comparable to Ryugu's regime, not a different-planet analogy. Critically, they report a real commanded-vs-achieved hop-distance measurement: a 1 m commanded hop (flywheel driven to a calculated 550 RPM) produced a measured mean distance of 0.94 m across 30 trials ($\sigma = 0.07\text{ m}$) — a $\approx 94\%$ delivery efficiency, close to this platform's own clean-separation

mode ($\approx 95\%$) but far above its degraded-mode mean. This comparison is informative rather than flattering: it indicates the clean-launch actuation itself is not the deficiency — when separation goes cleanly, this platform matches Hockman et al.’s delivery efficiency almost exactly — but that the terrain-contact degradation characterized in §3.1 is a real, distinct, and as yet structurally unresolved failure mode specific to how this platform’s launch state machine currently determines that separation has occurred.

Contact restitution, checked against real asteroid-lander hardware. §3.4.1’s deployed damping coefficient produces restitution $e \approx 0.2$. Biele et al. [33] performed physical pendulum-drop restitution testing on actual MASCOT flight hardware (the same lander design already cited for its landing-detection logic [9]) against a hard, ideally elastic surface, measuring a median structural coefficient of restitution of ≈ 0.4 and a maximum of ≈ 0.6 across trials. This platform’s simulated $e \approx 0.2$ sits below that measured range, meaning the deployed passive damping is, if anything, more conservative (more energy-absorbing) than measured real lander hardware bouncing on a hard surface — consistent with a deliberately cautious design choice (§3.4.1 explicitly prioritizes decaying bounces over separation-velocity margin) rather than an artifact of unrealistic simulated contact physics.

Self-righting, checked against a dedicated reaction-wheel unicycle. §3.3/§7 report a righting maneuver whose successful rolls complete in a few seconds and which reliably recovers moderate landing tilts, with perfect full inversions the residual hard case. Geist et al.’s Wheelbot [34], a 1.4 kg reaction-wheel-actuated unicycle purpose-built for rapid self-erection, recovers from a topple in under 0.5 s at a 100 Hz control rate — both faster and more reliable than this platform’s maneuver. The comparison needs an explicit caveat rather than a bare ratio: Wheelbot self-erects from a *partial* topple using a single-axis bang-brake maneuver optimized specifically for erection speed on a two-wheel platform standing on the ground, whereas this platform must roll a tripedal chassis from arbitrary 3-axis tilt (up to full inversion) while it rests against irregular regolith, with no gravity to assist the fall into upright. The gap is informative, not damning: it confirms that reaction-wheel self-erection is a sound, flight-demonstrated principle, and that this platform’s residual failures (perfect inversions wedged against terrain, §7) reflect the harder geometry and the absence of a settling gravity torque rather than a flaw in the actuation choice — while also marking real, unexploited headroom (the $\approx 500\times$ torque margin of §3.3 was never pushed toward a time-optimal maneuver).

8. DISCUSSION: FOUR LAWS OF MILLI-GRAVITY GROUND OPERATIONS

The platform’s development history yields four findings we consider more valuable than the nominal design margins, each established by direct measurement:

- 1) **Contact dynamics, not actuator torque, are the binding constraint.** The leg motors carry a $>60\times$ force margin over the hop energy requirement, yet launch

capability was governed entirely by stroke geometry against a friction capacity of $\mu mg \approx 1.8 \times 10^{-4}$ N and by contact-time dynamics. Torque margins that would be decisive on planetary surfaces are nearly irrelevant here.

- 1) **Active landing compliance is destabilizing under feedback latency.** Every actively controlled compliance scheme tested — stepped, ramped, and measured-state-mirroring — *added* energy at contact, the latter through classic phase-lag pumping. Impact dissipation belongs in passive mechanism properties (joint damping, and in future hardware, series elasticity [5]), where phase lag cannot exist.
- 1) **Every grounded actuator motion is a propulsion event.** Posture changes, stand-up ramps, and reaction-wheel momentum bleeds each ejected a resting robot from the surface during development (up to 0.128 m/s — three times a nominal launch). Internal torque against ground contact is a mobility mechanism [8]; used inadvertently, it is a failure mode. Ground-handling software for milli-gravity bodies must be designed as flight control, not manipulation: after touchdown, the correct number of commanded motions is zero.
- 1) **Attitude authority must be tied to commanded flight, not to sensed motion.** An early controller armed full tilt-correction whenever the robot reported itself airborne — a condition a bouncing, grounded robot also satisfies. The result was a measured self-sustaining loop: wheel torque against the surface acts as propulsion (Law 3), the resulting motion keeps the "airborne" flag set, and the fleet scattered itself for twelve hours without completing a single mission. The deployed controller latches full attitude authority only between a *commanded* ignition and first contact; all uncommanded motion receives dissipation-only rate damping, which by construction (τ opposing ω , $P = -\tau\omega < 0$) can calm motion but can never pump it.

9. CONCLUSION

Simulated end-to-end validation demonstrates that tri-pedal directional hopping with reaction-wheel stabilization is a viable locomotion and sampling strategy for microgravity rubble piles. A three-agent SpaceHopper swarm autonomously allocates scientific targets by market auction, traverses by metre stabilized directional hops with single-degree heading fidelity, lands, self-rights when required, and samples — with every subsystem claim in this paper backed by live telemetry rather than design intent. The four ground-operations laws of §8, together with the quantified launch-versus-landing damping tradeoff of §3.4.1, constitute the platform’s principal transferable contribution to small-body robotics; a series-elastic launch mechanism and hardware-in-the-loop validation are the natural next steps toward flight.

ACKNOWLEDGMENT

The authors thank Professor Suresh Balakrishnan for his guidance and support throughout the development of this work.

REFERENCES

REFERENCES

- [1] S. Watanabe *et al.*, "Hayabusa2 arrives at the carbonaceous asteroid 162173 Ryugu — A spinning top-shaped rubble pile," *Science*, vol. 364, no. 6437, pp. 268–272, Apr. 2019.
- [2] Japan Aerospace Exploration Agency (JAXA), "Hayabusa2 Project: Images from the MINERVA-II1 rover," JAXA Hayabusa2 Gallery.
- [3] JAXA Data ARchive and Transmission System (DARTS), "Watanabe_2019 Hayabusa2 Shape Models and Derivatives," ISAS/JAXA, 2019.
- [4] European Southern Observatory (ESO), "The Milky Way panorama," ESO GigaGalaxy Zoom Project, Image ID: eso0932a.
- [5] SpaceHopper Project, ETH Zurich, "SpaceHopper: A Small-Scale Legged Robot for Exploring Low-Gravity Celestial Bodies," arXiv:2403.02831, 2024.
- [6] M. J. Sidi, *Spacecraft Dynamics and Control: A Practical Engineering Approach*. Cambridge University Press, 1997.
- [7] B. Wie, *Space Vehicle Dynamics and Control*, 2nd ed. AIAA Education Series, 2008.
- [8] T. Yoshimitsu, T. Kubota, I. Nakatani, T. Adachi, and H. Saito, "Micro-hopping robot for asteroid exploration," *Acta Astronautica*, vol. 52, no. 2–6, pp. 441–446, 2003.
- [9] T.-M. Ho *et al.*, "MASCOT — The Mobile Asteroid Surface Scout onboard the Hayabusa2 mission," *Space Science Reviews*, vol. 208, pp. 339–374, 2017.
- [10] Maxon Group, "EC 20 flat Ø20 mm, brushless, 5 Watt," motor datasheet, maxon catalog.
- [11] Maxon Group, "RE 13 Ø13 mm, precious metal brushes" and "GP 13 A gearhead (67:1)," motor datasheets, maxon catalog.
- [12] G. Dudek, M. Jenkin, E. Milios, and D. Wilkes, "A taxonomy for multi-agent robotics," *Autonomous Robots*, vol. 3, pp. 375–397, 1996.
- [13] B. P. Gerkey and M. J. Mataric, "A formal analysis and taxonomy of task allocation in multi-robot systems," *The International Journal of Robotics Research*, vol. 23, no. 9, pp. 939–954, 2004.
- [14] Y. Huang, M. Li, and T. Zhao, "A Multi-Robot Coverage Path Planning Algorithm Based on Improved DARP Algorithm," arXiv:2304.09741, 2023.
- [15] J. Hu, H. Niu, J. Carrasco, B. Lennox, and F. Arvin, "Voronoi-Based Multi-Robot Autonomous Exploration in Unknown Environments via Deep Reinforcement Learning," *IEEE Transactions on Vehicular Technology*, vol. 69, no. 12, pp. 14413–14423, 2020.
- [16] S. Jorgensen, R. H. Chen, M. B. Milam, and M. Pavone, "The Team Surviving Orienteers Problem: Routing Robots in Uncertain Environments with Survival Constraints," *Autonomous Robots*, 2017, arXiv:1612.03232.
- [17] A. Shamshirgaran, S. Manjanna, and S. Carpin, "Distributed Multi-Robot Online Sampling with Budget Constraints," 2024 IEEE International Conference on Robotics and Automation (ICRA), arXiv:2407.18545.
- [18] J. Chiun, S. Zhang, Y. Wang, Y. Cao, and G. Sartoretti, "MARVEL: Multi-Agent Reinforcement Learning for Constrained Field-of-View Multi-Robot Exploration in Large-Scale Environments," 2025 IEEE International Conference on Robotics and Automation (ICRA), arXiv:2502.20217.
- [19] P. E. Hart, N. J. Nilsson, and B. Raphael, "A Formal Basis for the Heuristic Determination of Minimum Cost Paths," *IEEE Transactions on Systems Science and Cybernetics*, vol. 4, no. 2, pp. 100–107, 1968.
- [20] S. M. LaValle, "Rapidly-Exploring Random Trees: A New Tool for Path Planning," TR 98-11, Iowa State University, 1998.
- [21] S. Karaman and E. Frazzoli, "Sampling-based Algorithms for Optimal Motion Planning," *The International Journal of Robotics Research*, vol. 30, no. 7, pp. 846–894, 2011.
- [22] O. Khatib, "Real-Time Obstacle Avoidance for Manipulators and Mobile Robots," *The International Journal of Robotics Research*, vol. 5, no. 1, pp. 90–98, 1986.
- [23] H. Kalita and J. Thangavelautham, "Motion Planning on an Asteroid Surface with Irregular Gravity Fields," AAS Guidance, Navigation and Control Conference, 2019, arXiv:1902.02065.
- [24] X. Liu, H. Yang, and S. Li, "Collision-Free Trajectory Design for Long-Distance Hopping Transfer on Asteroid Surface Using Convex Optimization," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 57, no. 5, pp. 3071–3083, 2021.
- [25] C. Zhao, S. Zhu, and P. Di Lizia, "Collision-probability-based hopping trajectory optimization on hazardous terrain of small bodies," *Advances in Space Research*, vol. 71, no. 11, pp. 4877–4894, 2023.
- [26] S. Swinton, J.-H. Ewers, E. McGookin, D. Anderson, and D. Thomson, "Autonomous mission planning for planetary surface exploration using a team of micro rovers," *Frontiers in Robotics and AI*, 2025.
- [27] H. Huang, Z. Li, Z. Guo, J. Guo, L. Suo, and H. Wang, "Prescribed Performance Adaptive Balance Control for Reaction Wheel-Based Inverted Pendulum-Type Cubli Rovers in Asteroid," *Aerospace* (MDPI), vol. 9, no. 11, art. 728, 2022.
- [28] C.-Y. Lee, "Enhancing Quadruped Locomotion Stability with Reaction Wheel Systems and Model Predictive Control," M.S. thesis, CMU-RI-TR-22-57, Robotics Institute, Carnegie Mellon University, Jul. 2022.
- [29] A. Cumerlotti, "Reaction Wheels: Enhancing Aerial Maneuvers for Legged Robots," M.S. thesis, Politecnico di Torino, in collaboration with Istituto Italiano di Tecnologia (IIT) Dynamic Legged Systems Lab, Academic Year 2021/2022.
- [30] V. Vasilopoulos, K. Machairas, and E. Papadopoulos, "Quadruped Pronking on Compliant Terrains Using a Reaction Wheel," presented at IEEE ICRA, 2016.
- [31] N. Cherouvim and E. Papadopoulos, "Speed Control of Quadrupedal Bounding Using a Reaction Wheel," in *Proc. 2006 IEEE Int. Conf. on Control Applications (CCA)*, Munich, Germany, Oct. 2006, pp. 2481–2486.
- [32] B. J. Hockman, A. Frick, I. A. D. Nesnas, and M. Pavone, "Design, Control, and Experimentation of Internally-Actuated Rovers for the Exploration of Low-Gravity Planetary Bodies," *Journal of Field Robotics*, vol. 34, no. 1, pp. 5–24, 2017.
- [33] J. Biele, L. Kessler, C. D. Grimm, S. Schröder, O. Mierheim, M. Lange, and T.-M. Ho, "Experimental Determination of the Structural Coefficient of Restitution of a Bouncing Asteroid Lander," DLR, arXiv:1705.00701, 2017.
- [34] A. R. Geist, J. Fiene, N. Tashiro, Z. Jia, and S. Trimpe, "The Wheelbot: A Jumping Reaction Wheel Unicycle," *IEEE Robotics and Automation Letters*, arXiv:2207.06988, 2022.
- [35] C. Robin, R. Duchene, N. Murdoch, N. Vincent, *et al.*, "Mechanical properties of rubble pile asteroids (Dimorphos, Itokawa, Ryugu, and Bennu) through surface boulder morphological analysis," *Nature Communications*, vol. 15, art. 5629, 2024.