


(a) Receiver alone: calibration change rate; no setting passes the test



(b) Deployed settings: development accuracy against latency, each relative to the reference

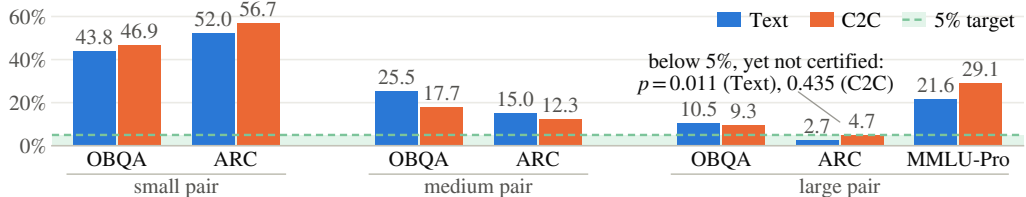