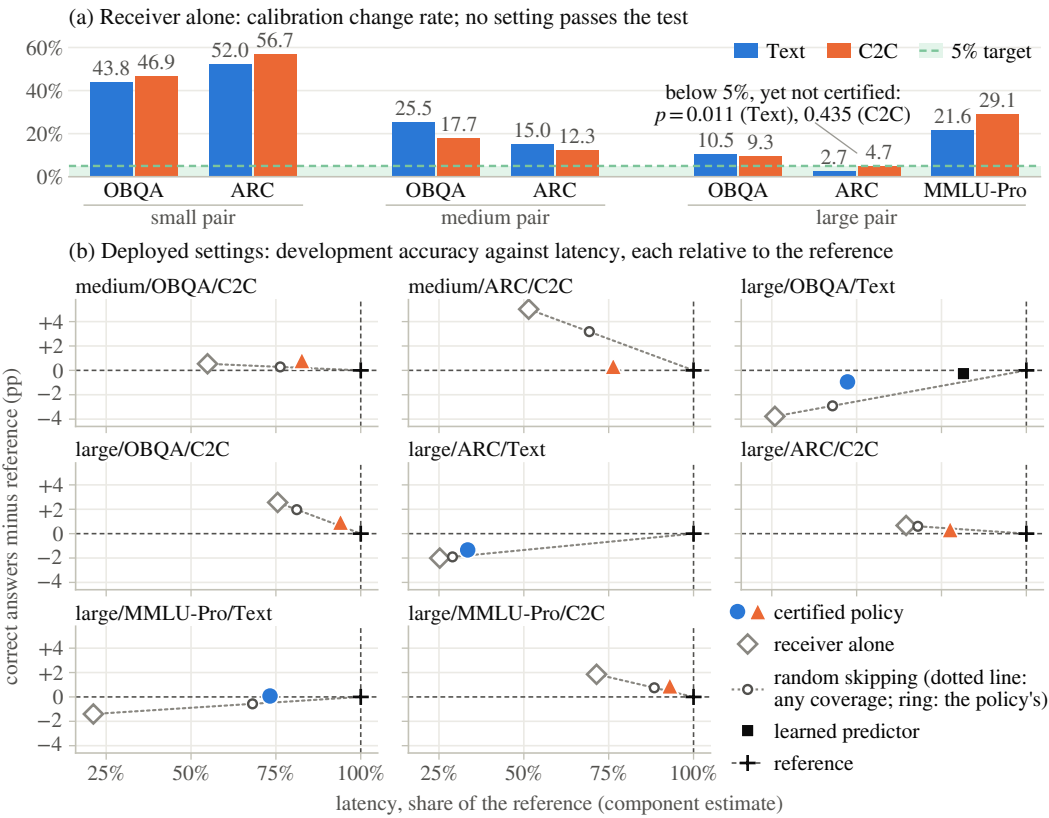

(a) Receiver alone: calibration change rate; no setting passes the test
60%
40%
20%
0%
Text
C2C
5% target
43.8
46.9
52.0
56.7
25.5
17.7
15.0
12.3
below 5%, yet not certified:
p = 0.011 (Text), 0.435 (C2C)
10.5
9.3
2.7
4.7
21.6
29.1
OBQA
ARC
OBQA
ARC
OBQA
ARC
MMLU-Pro
small pair
medium pair
large pair
(b) Deployed settings: development accuracy against latency, each relative to the reference
medium/OBQA/C2C
medium/ARC/C2C
large/OBQA/Text
large/OBQA/C2C
large/ARC/Text
large/ARC/C2C
large/MMLU-Pro/Text
large/MMLU-Pro/C2C
+4
+2
0
−2
−4
correct answers minus reference (pp)
25%
50%
75%
100%
latency, share of the reference (component estimate)
certified policy
receiver alone
random skipping (dotted line: any coverage; ring: the policy's)
learned predictor
reference