


VEHICLE HARNESS / OLED CABLE







12 V INPUT PROTECTION -> CANduino VIN

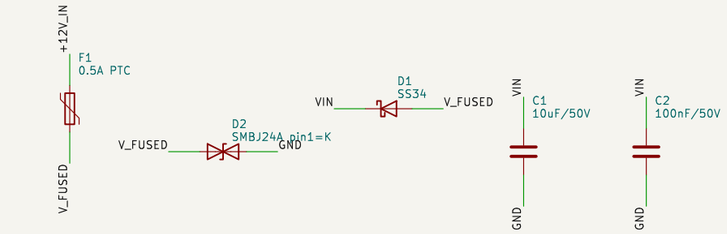


5 V DECOUPLING




CANduino v4 / v4.5 2 x 16 PIN HEADER




OLED BRIGHTNESS TRIMMERS (read on A0 / A1)

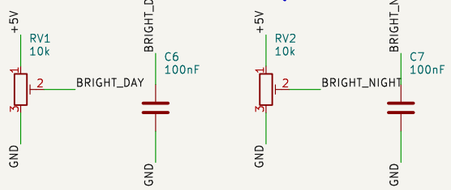


DASHBOARD LIGHTING INPUT 14.8 V -> D5

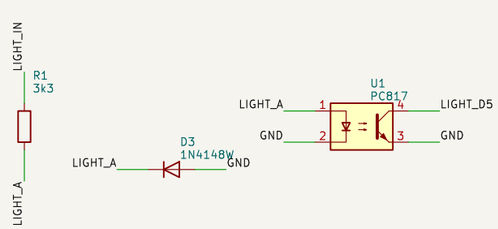



CANduino v4 / v4.5 2 x 16 PIN HEADER



OIL PRESSURE / TEMPERATURE SENSOR ON J1.7 / J1.8


J1 pin 1 = +12 V switched. F1/D1/D2 protect against reverse polarity, overload and load dump.

J2 order GND / +5 V / SCL / SDA — CHECK the silkscreen of your own OLED module before plugging it in.

CAN termination is on the CANduino itself (CAN_T jumper); there is none on this board.

R1/U1/D3: the lighting feed may be PWM dimmed; C5 + R2 turn it into a clean level on D5.

P1/P2 are 1x16 female sockets on the BOTTOM side of the board.

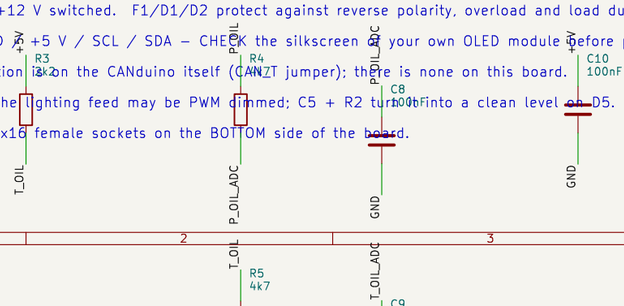

Gear / temperature display, MaxxECU CAN package 0x700
Plug-on carrier PCB for CANduino v4/v4.5 + 1.3 inch SH1106 OLED

Sheet: /
File: canduino_oled_shield_V005.kicad_sch

Title: CANduino OLED gear display shield

Size: A3	Date:	Rev: V005
KiCad E.D.A. kicad-cli 7.0.11+dfsg-1build4		Id: 1/1