



Data Health Assessment

For

Organization

Document Number: PDQH-ORG-DHA-001



Document Information			
Number	PDQH-ORG-DHA- 001	Version	1
Effective	Date: 04-02-2022	Issued	Date: 04-02-2022
Compiled by	PiLog Cloud		

		Amendment History	00	
Version	Date	Changed Chapter/Topic/Page	Pages	Checked By
01	Date: 04-02- 2022	First Release	17	CoE Team
	.10			



About This Document

This document contains detailed information about the material master data of Organization. An analysis was done on the data obtained from Organization and the details of the analysis were compiled in this report.

This report contains the following information:

The Scope of Analysis
Methodology adapted
Current status of Organization data
The next course of Action
Suggestions and Recommendations



Acronyms and Definitions

Acronym	Definition	
ISO	International Organization for Standardization	
ERP	Enterprise Resource Planning	
FFT	Free Format Text	
IT	Information Technology	
11	iniormation reciniology	
MDM	Master Data Management	
MDRM	Master Data Record Manager	
MFR	Manufacturer	
ОЕМ	Original Equipment Manufacturer	
OTD	Open Technical Dictionary	
PPO	PiLog Preferred Ontology	
PPR	PiLog Preferred Records	
PTNO	Part Number	
SPL	Supplier	
DQH	Data Quality Hub	



Contents

Acronyms and Definitions	
1. PREFACE	7
2. PROCESS & METHODOLOGY TO DELIVER SCOPE	
3. CONSIDERATIONS ON DATA ANALYSIS	15
3.1. Consideration on Data Analysis for DHA	15
4. DATA HEALTH AND QUALITY ANALYSIS RESULTS	17
4.1. Detailed Data Analysis on Data Uniqueness	17
4.1.1 Analysis on Material Records	
4.1.2 Analysis on Descriptions/Texts	18
4.1.3 Advanced Analysis on Descriptions/Texts	20
4.1.4 Analysis on Reference Details	22
4.1.5 Potential Duplicates w.r.t Manufacturer Part Number	23
4.2 Detailed Data Analysis on Data Completeness	32
4.2.1 Analysis on Description Length	32
4.2.2 Report on Reference Details	35
4.3 Detailed Data Analysis on Data Consistency	36
4.3.1 Detailed Data Analysis on Data Consistency	38
4.3.2 Non-standardized Prefixes in Description	38
4.3.3 Inconsistencies in UOMs	38
4.4 Analysis on Top 10 UOMs	39



4.5 Analysis on Top 10 COMMODITYs	41
5. Key Recommendations	42

1. PREFACE:

Data is of high quality, if it fits for its intended uses in operations, decision-making, and planning.

Data quality refers to the state of qualitative and quantitative pieces of information. Data is that which provides information about other data.

A Data Health Assessment (DHA) profiles and analyzes the quality and integrity of your master data (e.g., Material, Vendor, Service, Asset, Customer, Business Partner, Equipment's, Location etc.,). A DHA visualizes,'AS-IS' state of your data quality, completeness, consistency, conformity to standards, and duplicates. The report then summarizes the impact that poor data has on your business and recommends the next steps to achieve measurable data and business metric optimization. The analysis process can be conducted across multiple domains that may involve datasets for customers, vendors, materials, and finance types of information

2. PROCESS & METHODOLOGY TO DELIVER SCOP

PiLog utilized proprietary automated processes to generate highly probable data points that indicate the data health and quality of the customer Data Set.

These data quality processes and methodologies have been developed and proven over several years and allow us to readily identify certain characteristics indicating problem areas in both data and systems within an organization

The approach is to determine records that are duplicated and unique, structured, standardized and rich in item property or characteristic values to give an overview of quality

To determine the scope of the underlying root causes and to plan the ways that tools can be used to address data quality issues, it is valuable to understand these common data quality dimensions:





A. Completeness of Master Data:

Data completeness refers to an indication of whether or not all the data necessary to meet the current and future business information demand are available in the data resource.

It deals with determining the data needed to meet the business information demand and ensuring those data are captured and maintained in the data resource so they are available when needed. Various processes include Data Extraction, Data Transformation, Data Loading, Security implementation & Job Control.

B. Redundancy of Master Data:

Data redundancy ensures that data is not duplicated un-necessarily across any part of the system



The online store may have a sales department and a complaints department. When a user buys a new product, this will be store as a transaction, but both the sales department and the complaints department may need this information at some point.

It would be possible for each department to have its own separate database and each time there is a transaction it gets put into each database. This solution is not ideal though, as having to input the same data into multiple places risks user entry errors leading to data consistency problems.

C. Compliance of Master Data:

Data compliance refers to a state of being in accordance with established guidelines or specifications.

The growing number of quality standards and regulations (industry specific or not) has also drawn attention to Master data management. In order to comply with these requirements, companies must meet certain criteria which are directly or indirectly impacted by the quality of data in the systems. There are many compliance risks that companies run from having bad Master data management:

- SOX risks occur in maintaining reporting structures and processing critical master data such as vendor bank accounts, fixed-asset data, contracts and contract conditions
- Petrochemical industry companies that are regulated by refining safety and
 operational standards and recommended practices may have significant exposure to
 legal risk and could even lose their operating licenses if their master records are
 incorrect with respect to product composition, storage locations, recording of
 ingredients, etc.
- Fiscal liabilities, such as VAT, produce risk. The VAT remittance may be incorrect if the relevant fields in the master data are not appropriately managed, possibly leading to inaccurate VAT percentages on intercompany sales

D. Consistency & Integrity of Master Data:

Data consistency refers to the transparency of the information, or the ability for other to see the changes and trends of data



It is when you ensure that the same data that is being used in different parts of the system will always be the same. The data is consistent across the entire system

In many examples, you may find the same data in needed in more than one place. In the online store example, the users address may be part of their signup information, but it will also need to appear on delivery information. Having to input the data directly into every place that it is needed causes problems if that data needs to be changed

If the user moves home, then every place their address appears will need to be manually changed to ensure the data in consistent. If you do not do all of these updates, then you'll have a situation where the address in one part of the system will be different to the address in another part of the system. This is solved by centralizing the data so there is one place that the address is stored. Any part of the system that needs to have the address can then just reference back to that central address location and find to find the data. When you do this you only have the change the data once for that change to spread through the whole system, ensuring that data always remains consistent.

Data integrity refers to the accuracy and reliability of the data being collected

E. Accuracy of Master Data:

Data accuracy is one of the components of data quality. It refers to whether the data values stored for an object are the correct values. To be correct, a data values must be the right value and must be represented in a consistent and unambiguous form

For example, birth date is December 13, 1941. If a personnel database has a BIRTH_DATE data element that expects dates in USA format, a date of 12/13/1941 would be correct. A date of 12/14/1941 would be inaccurate because it is the wrong value. A date of 13/12/1941 would be wrong because it is a European representation instead of a USA representation

There are two characteristics of accuracy: form and content. Form is important because it eliminates ambiguities about the content. The birth date example is ambiguous because the reviewer would not know whether the date was invalid or just erroneously represented. In the case of a date such as 5 February, 1944, the USA representation is 02/05/1944, whereas the European representation is 05/02/1944. You cannot tell the representation from the



value and thus need discipline in creating the date values in order to be accurate. A value is not accurate if the user of the value cannot tell what it is

The concept of accuracy also applies above the data element level. Data elements are never recorded in isolation. They are value attributes of business objects such as personnel records, orders, invoices, payments, and inventory records. The business objects represent real-world objects or events, and each consists of one or more rows of one or more tables connected through keys. Object-level inaccuracies consist of objects that are missing, have missing parts, or that exist but should not

F. Provenance of Master Data:

Data provenance documents the inputs, entities, systems, and processes that influence data of interest, in effect providing a historical record of the data and its origins. The generated evidence supports essential forensic activities such as data-dependency analysis, error/compromise detection and recovery, and auditing and compliance analysis

The provenance of data which is generated by complex transformations such as workflows is of considerable value. From it, one can ascertain the quality of the data based on its ancestral data and derivations, track back sources of errors, allow automated re-enactment of derivations to update a data, and provide attribution of data sources. Provenance is also essential to the business domain where it can be used to drill down to the source of data in a data warehouse, track the creation of intellectual property, and provide an audit trail for regulatory purposes

The use of data provenance is proposed in distributed systems to trace records through a dataflow, replay the dataflow on a subset of its original inputs and debug data flows. To do so, one needs to keep track of the set of inputs to each operator, which were used to derive each of its outputs

G. Uniqueness or Duplication of Master Data:

Duplication of Master Data is a very common area of concern, normally resultant of systems that do not mitigate causes of bad data. Factors involved in capturing Master Data are derived from different procedures; multiple users, locations and languages; data degradation; multiple versions of master data; variation of standards/practices over time and human error



Hence, uniqueness of mater data items is the first check performed on a master data set to determine if processes and systems generate master data that is not duplicated. The lack of unique items or the presence of duplicated items implies that a Governance Structure including master data record management systems solution that forces end users to verify the nonexistence of the item before creation is not in place

Item uniqueness is examined across the following data elements:

- i. Material Numbers
- ii. Descriptions
- iii. Manufacturer Names / Supplier Names and Part Numbers

Uniqueness also helps determine the potential initial data set to be used for cataloguing. If material numbers are not determined to be unique, then descriptions will be used. If descriptions are not determined to be unique then a combination of descriptions and manufacturing names / supplier names and part numbers will be used

H. Structure of Master Data:

Un-Structured data is data that has no relevance. Structuring begins with the development of data requirements for a business function and its related objectives. Master data usage and relevance is reliant upon master data having structure to ensure consistent classification and identification of data to continually eliminate data reconciliation issues. Further, structuring data, complimented with a record Management tool, will contribute to the elimination of item duplication

Lack of structure implies that the business functions within the organization are underperforming in relation to their objectives. Master Data must have uniform structure to ensure the elimination of duplicates or uniqueness, accuracy and relevance. Hence, PiLog will analyze the current data structure used to determine if a deliberate data structure is used to support business objectives

I. Standardization of Master Data:

Standardized data is reliable and has consistency across multiple items. Data Standards, complemented with Data Structure and uniqueness, provide assurance that data viewed



and used is all the data that exists within the master data set, therefore giving the business functions assurance that their business decisions are based on accurate information There are a number of industry standards, such as ISO 8000 that can govern master data and the use of a dataset. This analysis will identify the use of consistent standard rules. Standardization also contributes to elimination of item duplication

I. Data Richness:

Beyond uniqueness, structure and standard, there is a remaining data principal that indicates the overall quality of master data, Data Richness. Data Richness is the amount of properties available to describe an item and its' related relevance. Relevant properties ensure that master data is traceable, verifiable and complete as it is used by the organization. These relevant properties are described as Mandatory Property Values, which ensure the uniqueness and correct usage of that item, in particular to the purchasing of the item

Often organizational data does not contain all the necessary Mandatory Property Values and this leads to the existence of multiple versions or item duplication. By enriching Master Data property values, especially for critical items, duplications are further reduced; uniqueness is improved; and relevance and completeness of items are increased for the purchasing and inventory management cycles


Our Data Assessment is a services engagement backed by our proprietary algorithms that delivers report findings identifying specific data challenges that may be hindering your operational efficiency and ability to achieve successful business outcomes based on the health of your data.

The ISO 8000 standards are high level requirements that do not prescribe any specific syntax or semantics. On the other hand, the ISO 22745 standards are for a specific implementation of the ISO 8000 standards in extensible mark-up language (XML) and are aimed primarily at parts cataloguing and industrial suppliers

Data Harmonization processes & methodologies complies to ISO 8000 & ISO 22745 standards



Data Quality Standards

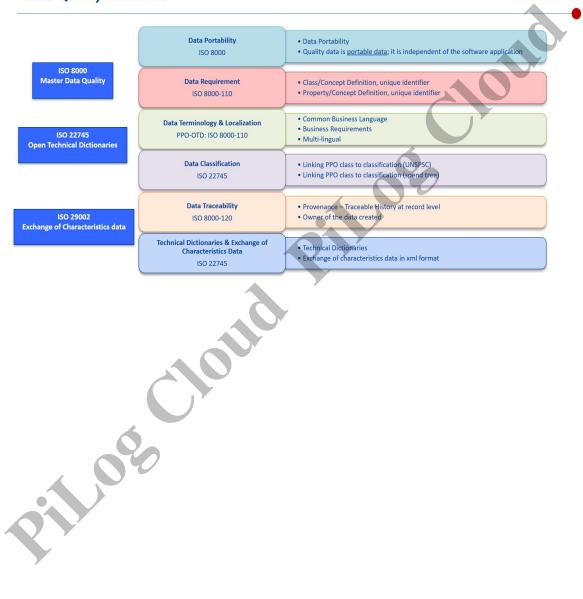



3.CONSIDERATIONS ON DATA ANALYSIS:

3.1 Consideration on Data Analysis for DHA:

The following considerations or highlights considered for analyzing the Data Health Assessment:

. 1	0.11%	
serial_no	Guidelines	
1	As some of the material numbers are repeated, the uniqueness of the materials is based on unique descriptions and Record number	
2	Description length is analyzed based on number of characters in each Descriptions	
3	Same or Duplicate short Descriptions with different material number are found by sorting all the Short descriptions with respect to Material Numbers	
4	Same or Duplicate Long Descriptions are found by sorting all the Long descriptions with respect to Material Numbers	
5	Inconsistencies in the given data is detected by analyzing the data like Part Number is in different formats as "P/N", "PN" etc.	
6	Material of construction for the spare are not given in standardized way, it is given in full form (like Stainless Steel) and also in short form (like SS)	
7	The data was analyzed specifically to find out the inconsistencies in Unit of Measure. Itis also in different formats like "Watt, W" etc.	
8	Data richness on Reference Data Availability (Part Number, Reference Number, Model Number etc.) is	



	Analyzed and counts are given
9	Duplication of Master Data w.r.t to Manufacturer Reference numbers like Part number or Model Numbers are analyzed based on genuineness of Part number with Same Manufacturer etc.
10	Duplicate Part Number with different Part Type, In this criteria Same part number is provided with different flag type (Suppl P/N, OEM Part No, Mnfr Part No).
11	Analysis on Top 10 Commodities and Top 10 UOM are performed by analyzing the Descriptions

A good measure of the quality of Master Data is a Median Grade; when 80% of all the Master Data per Characteristic are equal or above the grade B-



4.DATA HEALTH AND QUALITY ANALYSIS RESULTS

4.1 Detailed Data Analysis on Data Uniqueness

4.1.1 Analysis on Material Records

Report on Total Material Records uniqueness

Criteria	Count
Total Number of Records	10000
Unique Material Records	10000
Duplicate Material Records	0





4.1.2 Analysis on Descriptions/Texts

Report on Material Descriptions Uniqueness is as below

Criteria	Count	Percentage
Duplicates on Short Description	32	0.32
Duplicates on Long Description	0	0.0
Duplicates on Short and Long Description	0	0.0





4.1.3 Advanced Analysis on Descriptions/Texts

Below is the report generated after exclusion of unwanted text in the source description (E.g.: Special characters, Prefixes)

Criteria	Count	Percentage
Duplicates on Short Description	32	0.32
Duplicates on Long Description	0	0.0
Duplicates on Short and Long Description	0	0.0






4.1.4 Analysis on Reference Details

Report on Reference Data Uniqueness is as below

Criteria	Count	Percentage
Total Duplicates on Part Numbers	5756	57,56
Total Duplicates on Model Numbers	2264	22.64
Total Duplicates on Reference Numbers	268	2.68
Total Duplicates across different Reference Types	822	8.22

To download complete Reference Details Data click here

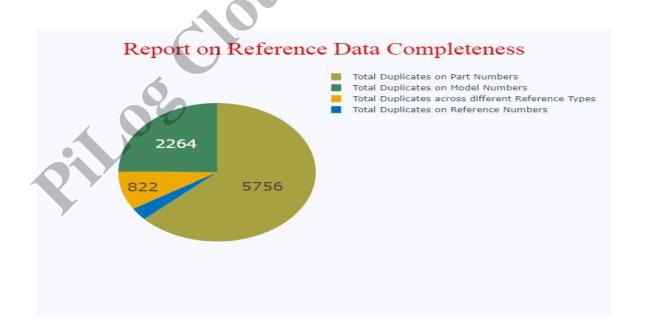

Document number: PDQH-ORG-DHA-001

Copyright 2021 PiLog. This document contains information proprietary to PiLog, India. It may not be reproduced without written permission. Disclosure of the contents of this document to third parties is strictly prohibited. The information herein is correct at time of publication.



4.1.5 Potential Duplicates w.r.t Reference Number

MATERIAL	LONG_DESCRIPTION	Reference_Number
M100007045	METER, FLOW; APPLICATION: TIZR DOSING TO PAN FLOW RATE MEASUREMENT, TYPE: ELECTROMAGNETIC, NOMINAL BORE: DN 25 DIN/EN PN 40, CONNECTION TYPE: FLANGED, MATERIAL: PTFE, MEDIUM: TIZR ACID (PH 0.2-4), ENCLOSURE RATING: NEMA 4X; IP 66/67, POTENTIAL: 20-55 VAC; 16-62 VDC, CURRENT: 4-20 MA, CALIBRATION COEFFICIENT: 0.8583/7, MAGNETIC FIELD SPECIFICATION: ELECTRODE HAST-C22; PN:50P25- EA191AA0ABAA, MFR: ENDRESS+HAUSER; MODEL:Promag 50 P, MFR:ENDRESS+HAUSER	
M100009534	SEAL, MECHANICAL; TYPE: DRIVE END SIDE; ADDITIONAL INFORMATION: COMPLETE, CONSISTS OF BEARING CAP POS 1, G-BT- 002902 SUPPORT COMPLETE POS 3 (INCL 3/1, 3/2, 3/4), G- BT-003032 COUNTER RING, POS 4, G-DI-002895 POINTER (AXIAL AS), POS 5, G-BT-00, PRESSURE SPRING, POS 6, G- BT-000774 SNAPRING, POS 7, G-DN-001422 O-RING, POS 9, G-DN-011412 O-RING, POS 10,	



G-DN-002216 O-RING, POS 11, G-DN-010815 HEXAGON SCREW, POS 12, G-DN-003119 WASHER, POS 13, G-DN-003461 SET SCREW, POS 14, ROTOFORM 3000; OEM PART NO: A2J1377, POS: 3, **EOUIPMENT** MANUFACTURER: SANDVIK, **EQUIPMENT MODEL NO: G-**DN-002968 M100007165 MOTOR, ELECTRIC; FRAME: 186, TYPE: AC SERVO, POWER: 67 KW, POTENTIAL: 460 V, CURRENT: 114 A, FREQUENCY: 46 HZ, SPEED: 1350 RPM, ELECTRICAL POLE QUANTITY: 4, MOUNTING FACILITY: IMB3, SHAFT DIAMETER: 65 MM, CASING MATERIAL: CI. TEMPERATURE CLASS: F. **ENCLOSURE RATING: IP55,** STANDARD: IEC/EN 60034-1, PHASE QUANTITY: 3; PN:1PH7186-7JD20-0BA3-Z, MFR: SIEMENS: S/N:E01429843010001/2014, DRAWING: 6351M4185 POS 3, POS:03, TEMP SENSOR KTY84, ENCODER H21 2048 SR M100004271 VALVE, SOLENOID; TYPE: BALL METAL SEATED, ON/OFF, VALVE SIZE: 150 MM, CONNECTION TYPE: FLANGED RF, OPERATED: PNEUMATIC SINGLE EFFECT

ACTUATOR, STYLE: 3-WAY,



DESIGN RATING: CL 150, BODY MATERIAL: SS. MATERIAL GRADE: CF3M, MATERIAL SPECIFICATION: ASTM A351, SOFTGOODS: PACKING: PTFE, POTENTIAL: 24 VDC, POWER: LESS THAN 4 W; MODEL:BR26/PK, MFR:SAMSON, PLUG/BALL/DISK AND SEAT MATERIAL: SS 316L; ACTUATOR MODEL: AT, AIR FAILURE: FAIL OPEN, AIR SUPPLY MAX/MIN: 800/500 **KPA, PIPING ORIENTATION:** HORIZONTAL, WITH LIMIT SWITCHES: INDUCTIVE IP-65, FILTER REGULATOR WITH PRESSURE GUAGE; DATA SHEET NO.: MD-502-8000-EG-IN-DAS-0030

M100006381

VALVE, SOLENOID; TYPE: GLOBE, ON/OFF, VALVE SIZE: 25 MM, CONNECTION TYPE: FLANGED RF, OPERATED: PNEUMATIC SINGLE EFFECT ACTUATOR, STYLE: 3-WAY, DESIGN RATING: CL 300, **BODY MATERIAL: SS,** MATERIAL GRADE: 316L. SOFTGOODS: PACKING: PTFE, POTENTIAL: 24 VDC, POWER: LESS THAN 4 W; MODEL:241-1, MFR:SAMSON, PLUG/BALL/DISK AND SEAT MATERIAL: SS 316L; ACTUATOR MODEL: 3271; AIR FAILURE: FAIL CLOSE, AIR **SUPPLY MAX/MIN: 800/500**



	KPA, PIPING ORIENTATION: HORIZONTAL, LIMIT SWITCHES: INDUCTIVE IP-65, FILTER REGULATOR WITH PRESSURE GAUGE; DATA SHEET NO.: MD-502-8000-EG- IN-DAS-0030	
M100006380	VALVE, CONTROL; TYPE: GLOBE, ON/OFF, VALVE SIZE: 100 MM, CONNECTION TYPE: FLANGED RF, CONNECTION SIZE: 4 IN, BODY MATERIAL: CS ASTM A216 GR WCC, DESIGN RATING: CL 150, OPERATION METHOD: PNEUMATIC ACTUATOR, TRIM: PLUG/BALL/DISK/SEAT MATERIAL: SS 316, SOFTGOODS: PACKING: PTFE; MODEL:241-1, MFR:SAMSON, DWG: MD-502-8000-EG-IN- DAS-0030 REV:0, AIR FAILURE: FAIL OPEN, AIR SUPPLY MAX/MIN: 800/500 KPA, WITH SINGLE EFFECT PNEUMATIC ACTUATOR MODEL: 3271, SOLENOID VALVE, QUANTITY: 1, STYLE: 3-WAY, POTENTIAL: 24 VDC, POWER: LESS THAN 4W, PIPING ORIENTATION: HORIZONTAL AND LIMIT SWITCHES: INDUCTIVE IP65, FILTER REGULATOR WITH PRESSURE GUAGE	
M100004422	ADAPTOR SLEEVE, BEARING; APPLICATION: CALCINER	-00003



	REVERSIBLE BELT CONVEYOR BEARING HOUSING, DIMENSIONS: ID 90 X LG 71 MM; PN:H320, MFR: LFD; PN:N048632499, OEM: OUTOTEC; MANUF DRAWING: 190267-M05-01, POS:2.2 & 3.2 & 6.2 & 7.2 & 14.2 & 15.2, DRAWING: MD-402-4800-EG- ME-DWG-00003	Cloud
M100005681	ADAPTOR SLEEVE, BEARING; APPLICATION: CALCINER REVERSIBLE BELT CONVEYOR BEARING HOUSING, DIMENSIONS: ID 60 X LG 50 MM; PN:H313, MFR: LFD; PN:N048632509, OEM: OUTOTEC; MANUF DRAWING: 190267-M05-01, POS:17.2 & 18.2, DRAWING: MD-402- 4800-EG-ME-DWG-00003	-00003
M100003579	BEARING, ROLLER; TYPE: TAPERED, ROW: SINGLE, INSIDE DIAMETER: 35 MM, OUTSIDE DIAMETER: 72 MM, WIDTH: 24.25 MM, CAGE MATERIAL: STEEL, SPEED: 9500 RPM, LOAD CAPACITY: DYNAMIC 81.2 X STATIC 78 KN, APPLICATION: CALCINER HYDRATE CONVEYOR GEARBOX; PN:32207, MFR: SKF; EQ MODEL:TBH-272 I=17.4, MFR:DAEHWA REDUCTION GEAR CO.,LTD., DRAWING: MD-402-4910-EG- ME-DWG-64160, REV:3, POS:4-1	-64160



M100006609	BEARING, ROLLER; TYPE: TAPERED, ROW: SINGLE, INSIDE DIAMETER: 65 MM, OUTSIDE DIAMETER: 140 MM, WIDTH: 51 MM, SPEED: 4800 RPM, LOAD CAPACITY: DYNAMIC: 323: STATIC: 335 KN, APPLICATION: CONVEYOR GEARBOX; PN:32313, MFR: SKF; EQ MODEL:TBH-480 I=30.9:1, MFR:DAEHWA REDUCTION GEAR CO.,LTD., DRAWING: MD-402-5010-EG- ME-DWG-64160, REV:2, POS:5-1	-64160
M100009697	DIAPHRAGM, PUMP; TYPE: PROCESS SIDE, APPLICATION: GASOLINE POLYMERIZATION INHIBITOR INJECTION PUMP; MANUFACTURER: OFFICINE MECCANICHE GALLARATESI SPA, MANUFACTURER PART NO: A01096, DRAWING NO: R20571-2100-MP-DWG- 75051/2/3, R20571-2200-MP- DWG-75016 & R20571-2400-MP-DWG-75003, POS: 9 (Y17), EQUIPMENT MANUFACTURER: OFFICINE MECCANICHE GALLARATESI SPA, EQUIPMENT MODEL NO: DOXA.L-3/17MM-10MMX25- 7MMX12, DOXA.L-4/7MM- 10MM-10MM-10MMX25, DOXA.L-5/15MM-10MM- 7MM10MM-7MMX25, DOXA.L/10MMX25,	-75016



	EQUIPMENT SERIAL NO:	
	319454/5/6/7,	
	319458/59/60/61,	
	319462/4/5/6/7,	
	319463/68/69/79/71,	
	319472, 319473, 319474,	
	319475, 319476/78/80,	
	319477/79/81	
		1
M100009691	O RING; INSIDE DIAMETER:	-75016
	29.82 MM, OUTSIDE	4
	DIAMETER: 35.06 MM, CROSS	20
	SECTIONAL SIZE: 2.62 MM,	
	APPLICATION: GASOLINE	
	POLYMERIZATION INHIBITOR	
	INJECTION PUMP;	
	MANUFACTURER PART NO:	
	OR3118, DRAWING NO:	
	R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 33	
	(Y18), EQUIPMENT	
	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	DOXA.L-3/17MM-10MMX25-	
	7MMX12, DOXA.L-4/7MM-	
	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
	5/15MM-10MM-7MM10MM-	
	7MMX25, DOXA.L/10MMX25,	
*	EQUIPMENT SERIAL NO:	
	319476/78/80,	
7	319477/79/81,	
	319454/5/6/7,	
	319458/59/60/61, 319474,	
	319475, 319462/4/5/6/7,	
	319463/68/69/79/71,	
	319472, 319473	
	017172,017170	



M100009693	O RING; INSIDE DIAMETER:	-75016
	319472, 319473	
M100009649	VALVE, BALL; APPLICATION: GASOLINE POLYMERIZATION INHIBITOR INJECTION PUMP; MANUFACTURER PART NO: 1/4GR10ISO3290, DRAWING NO: R20571-2100-MP-DWG- 75051/2/3, R20571-2200-MP-	-75016



	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 4 (VA),	
	EQUIPMENT	
	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	DOXA.L-3/17MM-10MMX25-	
	7MMX12, DOXA.L-4/7MM-	
	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
	5/15MM-10MM-7MM10MM-	_
	· ·	
	7MMX25, DOXA.L/10MMX25,	
	EQUIPMENT SERIAL NO:	
	319476/78/80,	
	319477/79/81,	
	319454/5/6/7,	
	319458/59/60/61,319474,	
	319475, 319462/4/5/6/7,	
	319463/68/69/79/71,	
	319472, 319473	
M100009696	O RING; INSIDE DIAMETER:	-75016
	4.47 MM, OUTSIDE	
	DIAMETER: 8.03 MM, CROSS	
	SECTIONAL SIZE: 1.78 MM,	
	APPLICATION: GASOLINE	
	POLYMERIZATION INHIBITOR	
	INJECTION PUMP;	
	MANUFACTURER PART NO:	
	OR2018, DRAWING NO:	
	R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
47 Y	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 20	
Y	(Y17), EQUIPMENT	
	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	1	
	DOXA.L-3/17MM-10MMX25- 7MMX12, DOXA.L-4/7MM-	
	/ N/IN/IX / 11(1X /\ _/ ./`/ \/ \/ _	



	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
	5/15MM-10MM-7MM10MM-	
	7MMX25, DOXA.L/10MMX25,	
	EQUIPMENT SERIAL NO:	
	319476/78/80,	
	319477/79/81,	
	319454/5/6/7,	
	319458/59/60/61, 319474,	
	319475, 319462/4/5/6/7,	
	319463/68/69/79/71,	_
	319472, 319473	
	3194/2, 3194/3	9
M100000000	O DING INCIDE DIAMETER	75016
M100009690	O RING; INSIDE DIAMETER:	-75016
	34.52 MM, OUTSIDE	
	DIAMETER: 41.58 MM, CROSS	
	SECTIONAL SIZE: 3.53 MM,	
	APPLICATION: GASOLINE	
	POLYMERIZATION INHIBITOR	
	INJECTION PUMP;	
	MANUFACTURER PART NO:	
	OR4137, DRAWING NO:	
	R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 24 (DJ),	
	EQUIPMENT	
	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	DOXA.L-3/17MM-10MMX25-	
	7MMX12, DOXA.L-4/7MM-	
7 7	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
7	5/15MM-10MM-7MM10MM-	
	7MMX25, DOXA.L/10MMX25,	
	EQUIPMENT SERIAL NO:	
	319476/78/80,	
	319477/79/81,	
	319454/5/6/7,	



	319458/59/60/61, 319474,	
	319475, 319462/4/5/6/7,	
	319463/68/69/79/71,	
	319472, 319473	
M100009694	O RING; INSIDE DIAMETER:	-75016
	101.27 MM, OUTSIDE	
	DIAMETER: 106.51 MM,	
	CROSS SECTIONAL SIZE: 2.62	J'
	MM, APPLICATION: GASOLINE	
	POLYMERIZATION INHIBITOR	
	INJECTION PUMP;	
	MANUFACTURER PART NO:	
	OR3400, DRAWING NO:	
	R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 22	
	(Y17), EQUIPMENT	
	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	DOXA.L-3/17MM-10MMX25-	
	7MMX12, DOXA.L-4/7MM-	
	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
	5/15MM-10MM-7MM10MM-	
	7MMX25, DOXA.L/10MMX25,	
	EQUIPMENT SERIAL NO:	
	319476/78/80,	
	319477/79/81,	
	319454/5/6/7,	
7	319458/59/60/61, 319474,	
	319475, 319462/4/5/6/7,	
•	319463/68/69/79/71,	
	319472, 319473	
M400000000	O DING INGIDE DIAMETER	75046
M100009698	O RING; INSIDE DIAMETER:	-75016
	20.35 MM, OUTSIDE	
	DIAMETER: 23.91 MM, CROSS	



	SECTIONAL SIZE: 1.78 MM,	
	APPLICATION: GASOLINE	
	POLYMERIZATION INHIBITOR	
	INJECTION PUMP;	
	MANUFACTURER PART NO:	
	OR2081, DRAWING NO:	
	R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: G (Y17),	
	EQUIPMENT	4
	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	DOXA.L-3/17MM-10MMX25-	
	·	
	7MMX12, DOXA.L-4/7MM-	
	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
	5/15MM-10MM-7MM10MM-	
	7MMX25, DOXA.L/10MMX25,	
	EQUIPMENT SERIAL NO:	
	319476/78/80,	
	319477/79/81,	
	319454/5/6/7,	
	319458/59/60/61, 319474,	
	319475, 319462/4/5/6/7,	
	319463/68/69/79/71,	
	319472, 319473	
M100009687	DIAPHRAGM, PUMP; TYPE:	-75016
	OIL SIDE, APPLICATION:	
	GASOLINE POLYMERIZATION	
	INHIBITOR INJECTION PUMP;	
	MANUFACTURER PART NO:	
	A01132, DRAWING NO:	
	R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 10	
	(Y17), EQUIPMENT	



	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	DOXA.L-3/17MM-10MMX25-	
	7MMX12, DOXA.L-4/7MM-	
	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
	5/15MM-10MM-7MM10MM-	
	7MMX25, DOXA.L/10MMX25,	l v
	EQUIPMENT SERIAL NO:	
	319476/78/80,	4
	319477/79/81,	40
	319454/5/6/7,	
	319458/59/60/61,319474,	
	319475, 319462/4/5/6/7,	
	319463/68/69/79/71,	
	319472, 319473	
M100009688	O RING; INSIDE DIAMETER:	-75016
	6.07 MM, OUTSIDE	
	DIAMETER: 9.63 MM, CROSS	
	SECTIONAL SIZE: 1.78 MM,	
	APPLICATION: GASOLINE	
	POLYMERIZATION INHIBITOR	
	INJECTION PUMP;	
	MANUFACTURER PART NO:	
	OR2025, DRAWING NO:	
	R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 20	
	(Y18), 23 (DJ), EQUIPMENT	
7	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	DOXA.L-3/17MM-10MMX25-	
	7MMX12, DOXA.L-4/7MM-	
	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
	5/15MM-10MM-7MM10MM-	



	7MMX25, DOXA.L/10MMX25, EQUIPMENT SERIAL NO: 319476/78/80, 319477/79/81, 319454/5/6/7, 319458/59/60/61, 319474, 319475, 319462/4/5/6/7, 319463/68/69/79/71, 319472, 319473	Choile
M100009664	SEAL, RING; APPLICATION: GASOLINE POLYMERIZATION INHIBITOR INJECTION PUMP; MANUFACTURER PART NO: GUAR_S_DE-7, DRAWING NO: R20571-2100-MP-DWG- 75051/2/3, R20571-2200-MP- DWG-75016, POS: 35 (Y17), EQUIPMENT MANUFACTURER: OFFICINE MECCANICHE GALLARATESI SPA, EQUIPMENT MODEL NO: DOXA.L-3/17MM-10MMX25- 7MMX12, DOXA.L-4/7MM- 10MM-10MM-10MMX25, DOXA.L-5/15MM-10MM- 7MM10MM-7MMX25, DOXA.L/7MMX25, EQUIPMENT SERIAL NO: 319454/5/6/7, 319458/59/60/61, 319462/4/5/6/7, 319463/68/69/79/71, 319474, 319475, 319476/78/80	-75016
M100009702	SEAT, VALVE; APPLICATION: GASOLINE POLYMERIZATION INHIBITOR INJECTION PUMP; MANUFACTURER PART NO:	-75016



	12143, DRAWING NO:	
	R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 2 (VA),	
	EQUIPMENT	
	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	DOXA.L-3/17MM-10MMX25-	
	7MMX12, DOXA.L-4/7MM-	4
	10MM-10MM-10MMX25,	
	DOXA.L/7MMX25, DOXA.L-	
	5/15MM-10MM-7MM10MM-	
	7MMX25, DOXA.L/10MMX25,	
	EQUIPMENT SERIAL NO:	
	319476/78/80,	
	319477/79/81,	
	319454/5/6/7,	
	319458/59/60/61, 319474,	
	319475, 319462/4/5/6/7,	
	319463/68/69/79/71,	
	319472, 319473	
M100009650	SEAL, OIL; TYPE: LIP,	-75016
	APPLICATION: GASOLINE	
	POLYMERIZATION INHIBITOR	
	INJECTION PUMP;	
	ADDITIONAL INFORMATION:	
	HALLITE605-045;	
	MANUFACTURER PART NO:	
	HALLITE605-045, DRAWING	
7	NO: R20571-2100-MP-DWG-	
	75051/2/3, R20571-2200-MP-	
	DWG-75016 & R20571-2400-	
	MP-DWG-75003, POS: 27	
	(Y17), EQUIPMENT	
	MANUFACTURER: OFFICINE	
	MECCANICHE GALLARATESI	
	SPA, EQUIPMENT MODEL NO:	
	311, 2001 112111 1102 22 1101	





4.2 Detailed Data Analysis on Data Completeness

4.2.1 Analysis on Description Length

Below is the Analysis on description lengths of short descriptions

Criteria	Count
Materials having Short text length less than 10	31
Materials having Short text length between 10 and 30	620
Materials having short text length between 10 and 30	630
Materials having Short text length between 30 and 40	1490


Analysis on Min, Max, Medium Lengths

Criteria	Length

Document number: PDQH-ORG-DHA-001



Minimum short text length	31
Medium short text length	630
Maximum Short text length	1490

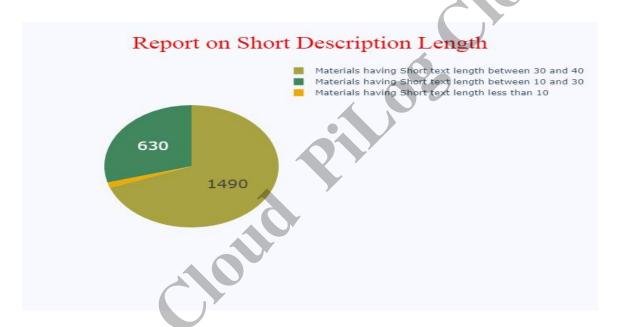


Below is the Analysis on description lengths of long descriptions

Criteria	Count
Long Descriptions with character length ranges between 0 and 470	9484
Long Descriptions with character length ranges between 470 and 940	487
Long Descriptions with character length ranges between 940 and 1410	26



Long Descriptions with character length	3
ranges above 1410	

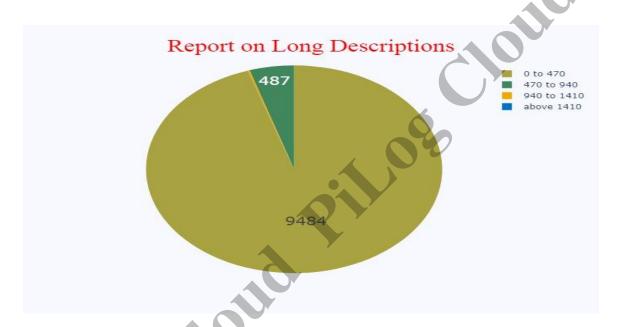


4.2.2 Report on Reference Data Completeness

Criteria	Total Number of Records	Percentage
Total part numbers	11703	117.03
Total model numbers	4731	47.31
Toatal reference numbers	1064	10.64
Total drawing numbers	3492	34.92
Total vendor names	45	0.45
Total supplier	222	2.22

Document number: PDQH-ORG-DHA-001



Total OEM Part numbers	86	0.86

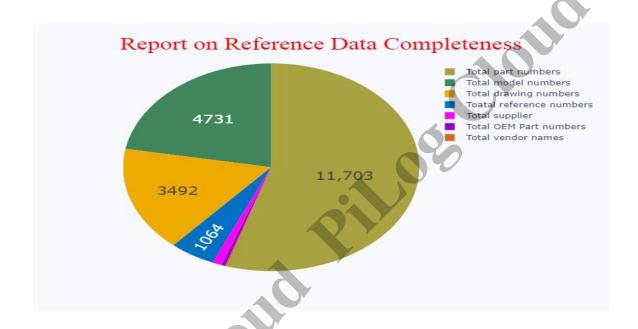



4.3 Detailed Data Analysis on Data Consistency

Standard Format	Variant Format	Number of Materials Linked
BRAND NAME	BRAND	152
BRAND NAME	BRAND NAME	8
MANUFACTURER PART NO	DESIGNATION	13
DRAWING	DOC	1
DRAWING	DRAWING NO	1460
DRAWING	DRG	31
DRAWING	DWG	1600
DRAWING	DWG NO	7
POS	ITEM NO	9
MANUFACTURER PART NO	MANUF	1
MANUFACTURER PART NO	MANUFACTURER PART NO	2224
MODEL/MACHINE NO	MODEL	3927
MODEL/MACHINE NO	MODEL NO	1620
MODEL/MACHINE NO	MODEL NO.	1
OEM PART NO	OEM	814
OEM PART NO	OEM PART NO	51
ORDER NO	ORDER NO	46



ORDER NO	ORDER NO.	1
MANUFACTURER PART NO	P/N	98
MANUFACTURER PART NO	PART LIST	1
MANUFACTURER PART NO	PART NO	2248
MANUFACTURER PART NO	PN	\$ 955
POS	POS	1579
POS	POSITION NO	1
REFERENCE NO	REF	1149
REFERENCE NO	REFERENCE	42
REFERENCE NO	REFERENCE NUMBER	11
SERIAL NO	S/N	950
SERIAL NO	SERIAL	1
SERIAL NO	SERIAL NO	1197
SERIAL NO	SERIAL NUMBER	5
SUPPLIER PART NO	SUPPL	264
SUPPLIER PART NO	SUPPLY	222

To download complete Inconsistencies Prefixes Data click here

4.3.1 Detailed Data Analysis on Data Consistency

Standard UOM	Variant UOM	Number of Materials Linked
Current	A	2183



Current	AMP	6
Current	AMPERE	1
Current	AMPS	2
Meter	M	410
Meter	METER	1367
Meter	METER	4
Meter	METERS	4
Meter	METERS	410
Meter	MTR	4
Meter	MTR	1
Voltage	v	1367
Voltage	VOLT	1

To download complete UOM Prefixes Data click here

4.3.2 Inconsistencies in the Description:

MATERIAL	LONG_DESCRIPTION	Remarks
M100000024	FLANGE; TYPE: FORGED HUB; REFERENCE NO: 3 10113.0.03.121.110, DRAWING NO: 10113.0.03.121.110	The format of DRAWING is not standardized.
M100000041	BEARING, BALL; TYPE: ANGULAR CONTACT, ROW	The format of DRAWING is not standardized.



	QUANTITY: SINGLE, INSIDE DIAMETER: 60 MM, OUTSIDE DIAMETER: 130 MM, WIDTH: 31 MM, CAGE MATERIAL: MACHINED BRS, SPEED: REFERENCE: 6300, LIMITING: 6700 RPM, LOAD CAPACITY: STATIC: 76.5, DYNAMIC: 104 KN, APPLICATION: SPONGE ABSORBER LEAN OIL PUMP, HP FLARE KNOCK OUT DRUM PUMP; ADDITIONAL INFORMATION: SLPG INFO: VENDOR DOC: PCS1002979490160-01, PROJ	
M10000034	NUT, CAP; APPLICATION: PROCESS AIR COMPRESSOR TURBINE, DIAMETER: M36, THREAD: 3 MM, MATERIAL: SNB5M; OEM PN: 4411-13 OEM: MHI; MODEL: 8CL-9, REF: J0503729-274, S/N: ST-1777; MFR DRG: 760- 09938 REV 0	The format of DRAWING is not standardized.
M100000033	KEY, SHAFT; TYPE: COUPLING; PN:V2379A2 064, MFR: PEERLESS PUMP; EQ MODEL:30WJ-P02, 6AEF10, DWG NO: REFER PAGE 26	The format of DRAWING is not standardized.
M10000011	PANEL; TYPE: SINGLE LAYER EXPLOSION VENT, WIDTH: 1.524 M, LENGTH: 1.524 M; PN:140-	The format of DRAWING is not standardized.



	0000000397, MFR: REMBE;	
	MODEL:SK-EX-GO-VENT,	
	MER_ID:21864, DWG: 12-	
	02-05 REV:0	
M10000038	PIN; APPLICATION: BELT	The format of
	FILTER; PN:43842640100,	MANUFACTURER PART NO
	MFR: BREVINI;	is not standardized.
	MODEL:GEAR UNIT: PLB16-	, , ,
	R17-H1, REF:(SPIROL	
	12x40), SL2 PLB	
	08516/FS/250.8/K550-13-	
	73-B3A, DWG: 671-6630-	
	G50, SPIR: 1501228,	
	INTERMEDIATE FLANGE	
	BUSINESS CODE:	
	S850/S850//S300;	
	COMPONENT PART LIST:	
	DB1001451/B; EXPLODED	
	VIEW: SE1001451; GEAR	
	REDUCERS; PLANT: PAP	
M100000031	BEARING, ROLLER; TYPE:	The format of
	SPHERICAL, ROW: SINGLE,	MANUFACTURER PART NO
	INSIDE DIAMETER: 150	is not standardized.
	MM, OUTSIDE DIAMETER:	
	270 MM, WIDTH: 73 MM;	
	PN:GB288-87, MFR:	
	SHIJAZHUANG KINGDA	
	PUMP INDUSTRY GROUP	
	CO. LTD., PN:53530; DWG:	
	SBB007-743-00 REV:0,	
	FRAME ASSEMBLY 743;	
	F/HEBEI-PRC, DESLIMING	
	PUMP, MODEL: 12X10X-AH,	
	MANUF : SHIJAZHUANG	
	KINGDA PUMP INDUSTRY	
	GROUP CO. LTD	
M10000027	WASHER, LOCK; TYPE: TAB,	The format of



	MATERIAL: STEEL, INSIDE DIAMETER: 110 MM, OUTSIDE DIAMETER: 154 MM, THICKNESS: 1.75 MM, APPLICATION: FLUID BED COOLER; PN:MB-22, MFR: SKFMFR: COMSPAIN; DRAWING: MD-502-8000- MM-ME-MPO-0202, TRACK NO: DAP-ME-056	MANUFACTURER PART NO is not standardized.
M100000023	FILTER, ELEMENT; P/N: 3401544; LUBRICANT, OIL	The format of MANUFACTURER PART NO is not standardized.
M10000007	PICK UP; TYPE: MAGNETIC; MANUFACTURER PART NO: 3875360, MANUFACTURER: CUMMINS	The format of MANUFACTURER PART NO is not standardized.
M10000004	PICK UP; TYPE: MAGNETIC; MANUFACTURER PART NO: 3875360, MANUFACTURER: CUMMINS	The format of MANUFACTURER PART NO is not standardized.
M10000025	BELT, V; DESIGNATION : B- 116	The format of MANUFACTURER PART NO is not standardized.
M10000009	CONNECTOR; ADDITIONAL INFORMATION: IT BP; ARTICLE NO: HE56823, REFERENCE NO: 9007356, MODEL NO: H144 VP40	The format of MODEL/MACHINE NO is not standardized.
M10000021	BELT, V; REFERENCE: A-32, EQUIP/TAG MODEL: LVDH 50	The format of MODEL/MACHINE NO is not standardized.



M10000036	GASKET, PRE CUT; DIMENSIONS: ID 66 X OD 79 X THK 1.5 MM, STYLE: ST-706; PN:1AP54CGW0317, MFR: PARCOL; S/N:48546/47/48/49, DWG: MD-502-6000-IN- DSE-0136-0001, POS:24309301/40, DWG: MD-502-6000-IN-LST- 0136-0001, F/VALVE MODEL NO. :3-5432;DN 3IN X 4IN;ANSI;CL150;FLANGE RF	The format of MODEL/MACHINE NO is not standardized.
M10000008	SPRING; OEM PART NO: 54749114, VENDOR: INGERSOLL RAND; TYPE: GAS	The format of OEM PART NO is not standardized.
M100000026	GASKET; TYPE: PAN; OEM PART NO: 3099083,	The format of OEM PART NO is not standardized.
M10000040	BLOCK, CONTACT; TYPE: AUXILIARY, APPLICATION: CTV1 CONTACTOR, MV SWITCHGEAR PANEL; ADDITIONAL INFORMATION: PROJECT ORDER NO.: JE 1044/BBS, W/O LATCHED KIT; MANUFACTURER PART NO: 5126108700, MANUFACTURER: SCHNEIDER ELECTRIC, MANUFACTURER PART NO: AAF00967, EQUIPMENT MODEL NO: MOTORPACT	The format of ORDER NO is not standardized.



M10000030	VALVE, CONTROL; TYPE: ON/OFF, DIAPHRAGM, CONNECTION TYPE: FLANGE, OPERATION METHOD: SPRING CLOSE ACTUATOR, HAND WHEEL; MODEL:ES64, MFR:CRANE, S/N:100223821, ORDER NO: 410102-016; WITH FILTER REGULATOR; ENCLOSURE, MODEL: KLIPPON STB1, CABLE SIZE: 2.5MM, 690V,21A, MFR: WEIDMUELLER; WITH SOLENOID VALVE, CAT: WSET8327B002MS, PIPE: 1/4IN, ORI: 5.7, 10W, AIR-WATER-L.OIL: 10 BAR	The format of ORDER NO is not standardized.
M10000017	SPROCKET; TEETH QUANTITY: 23, PITCH: 300 MM; MODEL:B112, MFR:REXNORD, REF:7984, DWG: MD-502-8A35-ME- MPO-0504-0720 (200472- 05-10) REV:0, DWG: MD- 502-8A35-ME-GEA-0504- 0202 REV:0 POS:12-6, QTY: 2; F/INCRO DOUBLE STRAND HI-LOAD GRANULATOR ELEVATOR, MODEL: 4412-02M	The format of POS is not standardized.
M10000029	COUPLING, SHAFT; PN:GB/T5015.12.00, MFR: CITIC HEAVY INDUSTRIES COMPANY LTD; MODEL:ZL12, EQ MODEL:6A30-	The format of POS is not standardized.



	RM01A/B/C/D, DWG:	
	M427A(W) REV:0,	
	SUPERSEDES ITEM NO:	
	11066486	
M10000039	DIAPHRAGM; MATERIAL:	The format of POS is not
	GANG STEEL GR SM400B,	standardized.
	STEEL GR SUS410J1,	
	APPLICATION: 5TH STAGE;	
	MODEL:5EH-7BD, DWG:	
	760-08304-	
	77~83,105,205,605, DWG:	
	781-27361-001~003 781-	
	14924-001~005, POSITION	
	NO: 2515-11, 12, 15, 19, 21,	
	22, 33, 34; 2551-21, 28;	
	2715-11, 15; WITH KEY,	
	SUPPORT AND NOZZLE	
144000000		
M10000032	BELT, V; REFERENCE	The format of REFERENCE
	NUMBER: SPA 1120, PITCH	NO is not standardized.
	CIRCUMFERENCE: 1120	
	MM, TOP WIDTH: 13 MM,	
	THICKNESS: 10 MM,	
	MATERIAL: RUBBER,	
	POLYESTER, CROSS	
	SECTION SHAPE: NARROW,	
	WEDGE, STANDARD: ISO	
	4184; MODEL:SPA 1120,	
	MFR:DELTA NARROW	
M10000020	BELT, V; REFERENCE : A-	The format of REFERENCE
	32, EQUIP/TAG MODEL:	NO is not standardized.
	LVDH 50	
-		
M10000013	MODULE; TYPE: 8 DIGITAL	The format of REFERENCE
	OUTPUT, OPTICALLY	NO is not standardized.
	· · · · · · · · · · · · · · · · · · ·	
	·	
	OUTPUT, OPTICALLY ISOLATED, OUTPUT: 24 VDC 2 A; PN:6ES7322- 1BF01-0AA0;	NO is not standardized.



	MODEL:SIMATIC S7-300,	
	MFR:SIEMENS, REF:SM	
	322, 1 X 20 PIN; GASKET,	
	SIZE: ID 90 X OD 105 X THK	
	3 MM; FOR OBSERVATION	
	PEEPHOLE	
	1 221 110 22	
M10000037	BLOCK, TERMINAL;	The format of SERIAL NO is
11100000037	APPLICATION: SQUIRREL	not standardized.
	CAGE INDUCTION MOTOR;	not standar dized.
	MFR: ABB;	
	REF:3GZV284001-3,	
	F/MOTOR, PHASE: 3, DUTY:	9
	S1, ENCLOSURE: IP65,	
	INSULATION CLASS: F,	
	VOLTAGE: 460 V,	
	FREQUENCY: 60 HZ,	
	CURRENT: 19.7/16.8 A,	
	POWER: 12.7/11 KW,	
	SPEED: 3527/3520 RPM,	
	FRAME SIZE: M3BP160MA-	
	2B3 SERIAL NUMBER:	
	951812710001	
M10000035	GASKET; TYPE: TV/TL	The format of SERIAL NO is
	DUAL ENTRY,	not standardized.
	DIMENSIONS: WD 67.8 X LG	
	112.8 MM, MATERIAL:	
	COMPOSITE, APPLICATION:	
	TURBOCHARGER;	
	PN:1S4295, MFR:	
	CATERPILLAR; F/LHD	
*	SCOOPTRAM, MODEL:	
	R1300G, PRODUCT ID: CAT	
	R1300AL JB01374, ROPS	
	NO: 24530892389 OF	
	ENGINE, BRAND: CAT,	
	MODEL: 3306 DI, SERIAL:	
	10Z53862	



	-	
M10000018	BUSH, PUMP; TYPE:	The format of SERIAL NO is
	THROTTLE, MATERIAL:	not standardized.
	CARBON; PN:81198159,	
	MFR: JOHN CRANEMFR:	
	HYOSUNG-EBARA;	
	S/N :2827595-4, SIZE: 2.75	
	IN; F/POTABLE WATER	
	PUMP(MAX), MODEL:	
	150X100 IFW-2515XA, POS:	J'
	83	, —
M10000003	CLAMP; TYPE: CARGO;	The format of SERIAL NO is
	ADDITIONAL	not standardized.
	INFORMATION: QUADRO;	
	REFERENCE NO: 9160975,	
	SERIAL NO: IQ 200	
M10000014	CHASSIS, ELECTRICAL-	The format of SUPPLIER
	ELECTRONIC EQUIPMENT;	PART NO is not
	TYPE: PLC, MATERIAL:	standardized.
	PLASTIC, MOUNTING	
	FACILITY: SUB-PANEL,	
	HORIZONTAL ONLY,	
	DIMENSIONS: WD 76.2 X	
	HT 50.8 X DP 20.3 CM,	
	STANDARD: CE, CSA, UL	
	LISTED; PN:S97753403;	
	PN:148121, OEM: KEMPE	
	ENGINEERING;	
	MODEL:1756-A10 B,	
	MFR:ALLEN BRADLEY,	
	POWER SUPPLY: 5.1 VDC	
7 7	15 A/6 A, 24 VDC 2.8 A,	
	AMBIENT TEMPERATURE:	
,	60 DEG C, BRAND:	
	CONTROLOGIX; SLOT	
	QUANTITY: 10; SEC_ASSEM:	
	E, I & C	
M10000019	REFRACTORY; CONTAINER	The format of SUPPLIER



CAPACITY: 400 G, MATERIAL: MASTIC (SILICON), GRADE: 85N; PN:609942, SUPPL: PYROTEK; CHAULKLINE;

TYPE: CAULKING TUBE

PART NO is not standardized.

To download complete Inconsistencies Data click here



4.3.3 Non-standardized UOMs in Description

MATERIAL	LONG_DESCRIPTION	Remarks
M100000121	POWER SUPPLY; TYPE: SWITCH MODE, INPUT CURRENT:	UOM's
	5 AMP; MANUFACTURER PART NO: S8VK-C12024	Captured in
		Different Format
		rommat
M100000370	BATTERY; CURRENT CAPACITY: 123 AMPERE;	UOM's
	MANUFACTURER PART NO: CR123A, MANUFACTURER:	Captured in
	SANYO	Different
		Format
M100001378	CAP; TYPE: RETAINING; PN:220854, MFR: HYPERTHERM;	UOM's
11100001070	MODEL:DURAMAX HRT, F/HAND CUTTING TORCH	Captured in
	ASSEMBLY,100AMPS RATING,F/PLASMA ARC CUTTING	Different
	AND GOUGING MACHINE, MODEL: POWERMAX 1650	Format
M100000142	BELT, V; P/N: 5V1500, MANUFACTURER: D&D POWER	UOM's
M100000142	DRIVE; TYPE: WEDGE WRAPPED, TOP WIDTH: 5/8 IN,	Captured in
	THICKNESS: 35/64 IN, RIB QUANTITY: 1, MATERIAL:	Different
	RUBBER	Format
M100000622	METER FLOW TYPE DOTAMETER CONNECTION TYPE	HOM!
M100000632	METER, FLOW; TYPE: ROTAMETER, CONNECTION TYPE: FLANGE; PN:FLO-730285-2, MFR: TOKYOKEISO; REF:AM-	UOM's Captured in
	1401, DRAWING: MD-502-7110-DAS-1120-0026, TEFLON	Different
	COATING: 1 INCH	Format
M100003379	CONTROL; TYPE: REMOTE SWITCH; WITH 10 METER	UOM's
	CABLE, APPLICATION: REDUCTION GTC BLOWER ROOMS	Captured in Different
	DEMAG BRIDGE CRANES, DIMENSIONS: BRIDGE CRANE 6300 KG RATED LOAD; 10800 MM SPAN WIDTH; 42000	Format
"	MM CRANE WAY, STANDARD: CE; PN:DSE 10-R 2V2, MFR:	Tormat
	PHOENIX; TAG:MSICRAN-4311-MJKH-0001, CRANE	
	OPERATING VOLTAGE: 460 V, CRANE FREQUENCY: 60 HZ,	
	PENDANT VOLTAGE: 48 V	
M100004380	ROPE, WIRE; CONSTRUCTION: 8XK19S-PWRC(K),	UOM's



STRENGTH: TENSILE: 2160 N/MM2, DIAMETER: 11 MM,	Captured in
LAY: LEFT HAND ORDINARY, LENGTH: 42 M,	Different
SPECIFICATION: MIN BREAKING FORCE: 127.20 KN;	Format
PN:11.0-8XK19S-PWRC(K)-B-LHO. MFR: KONECRANES:	
· ·	
THOTORY ETD) EDITORING PRESENT	
RELT CONVEYOR: MATERIAL: ENDLIRA STEEL WIDTH:	UOM's
	Captured in
	Different
, · · · · · · · · · · · · · · · · · · ·	Format
	Format
omplete Non-Standardized UOMs Data click here	



4.4 Analysis on Top 10 UOMs

UOMs are listed below:

UOM	Top10 Count
LUM	3000
CAN	2000
SQM	1500
ASL	1500
KG	1000
SET	1000





5. Key Recommendations

- Establish a Master Data vision that recognizes Master Data as an asset that reduces cost, risk and exposure through efficient use of unique and reliable master data within the organization, related to external partners and customers
- The organization should convene a working group (e.g., data stewards) representing all relevant stakeholders to determine targets, set thresholds, and define the quality dimensions that are most important
- Periodic assessments should be conducted to determine if acceptable thresholds and targets are being met, and metrics should be updated accordingly
- Implement data standards to drive standard data in accordance with data requirements
- Implement data workflows to manage data approval criteria where the engineers review the data quality
- Implement advanced Master Data governance tools to control the implementation of data standards, work flows, enrichment of data, data lifecycle and uniqueness of data
- Set up analytics for contracting and spend analysis
- Establish Business Rules to align the organization on Cataloguing Standards such as language, measurements, units of measure, presentation of data, etc. using ISO 8000 standards
- Create standardized Short and Long Descriptions for all items to ensure purchasing accuracy
- Harmonize data with a final potential duplicate resolution process across and languages to ensure excess stock is used and not reordered or duplicated between the sites