



Assembly and registration drawings

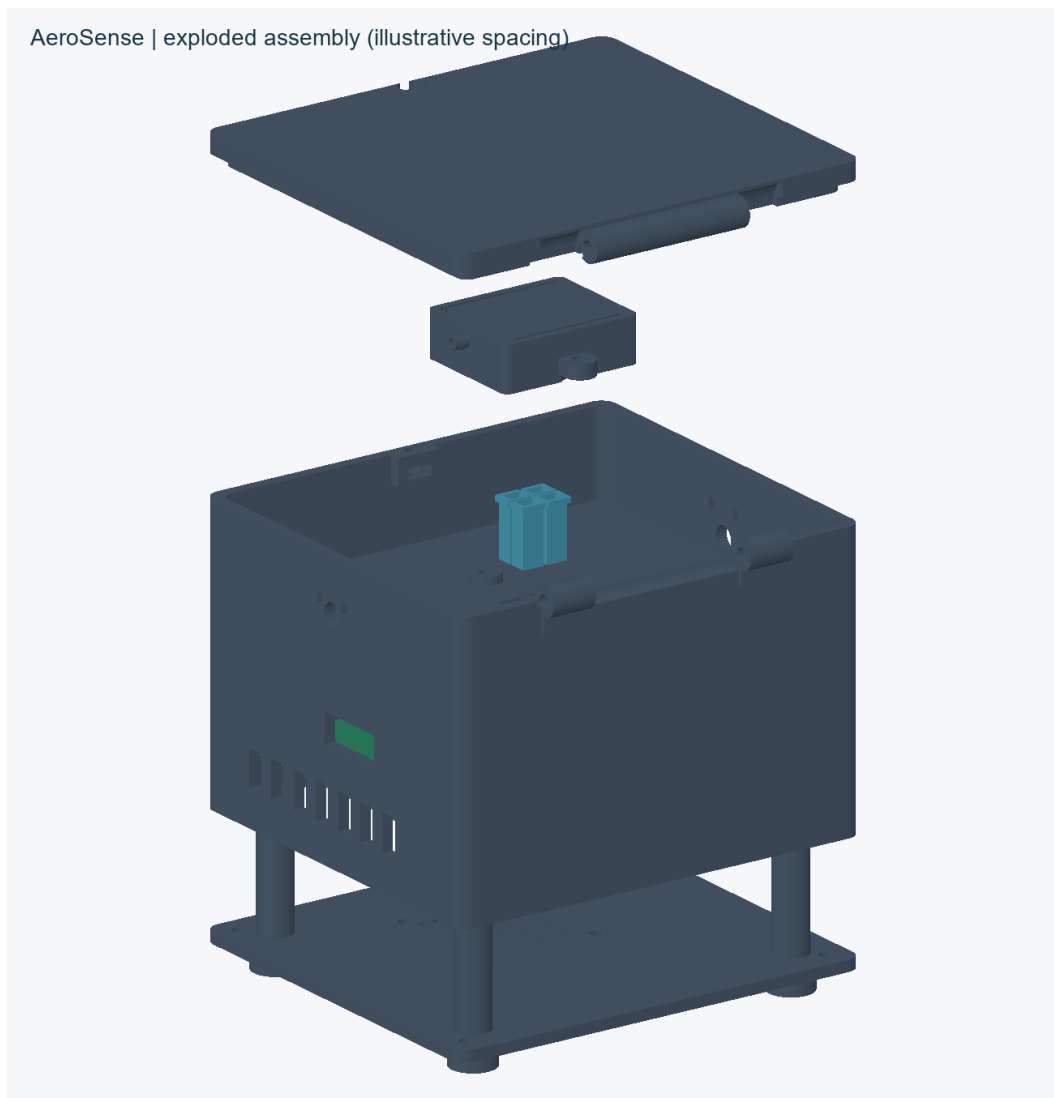

Exploded spacing is illustrative; actual placement is in CAD/assembly_coordinates and parts.json. Nominal overall bounds 114 x 109 x 91 mm exclude hoses/fasteners. Units:mm. Part sheets show views/envelopes, not a complete GD&T manufacturing drawing.

LED and PD optical registration

LED registration and PD optical center | mm

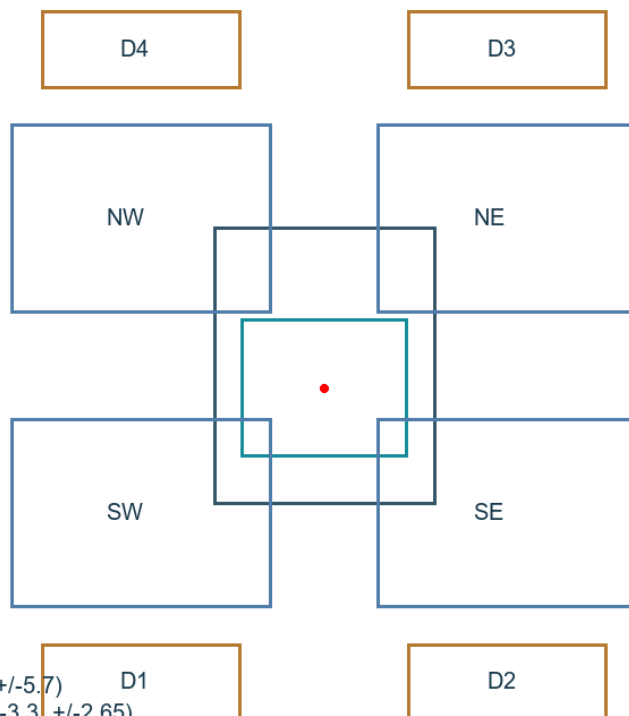


LED centers: (+/-3.3, +/-5.7)
Well liquid centers: (+/-3.3, +/-2.65)
PD package datum: (0,0)
PD optical center: (0,-0.4) provisional rotation
Sensitive rectangle 3 x 2.5 is an area proxy
Confirm bottom-view mirroring and pad polarity

PD offset 0.4 mm and LED-based well registration are independent. Package orientation, mounting holes and heights still require vendor STEP. Decimal display does not establish +/-0.01 mm accuracy.

01_integrated_body

01_integrated_body

TOP

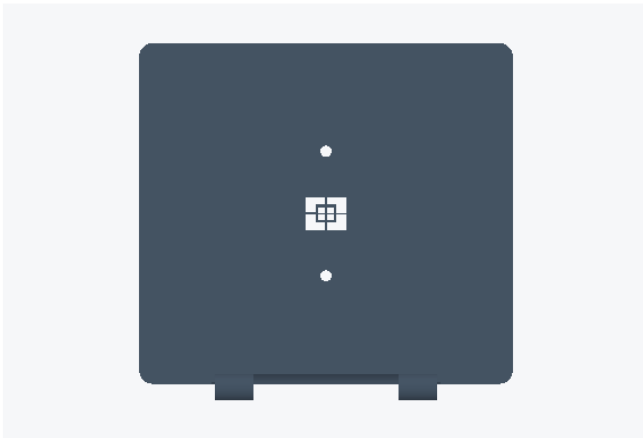


X 114.00 | Y 109.00 mm

FRONT




X 114.00 | Z 81.00 mm

RIGHT

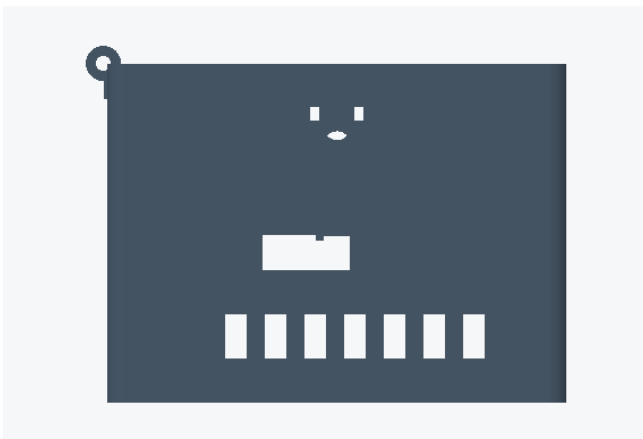

Y 109.00 | Z 81.00 mm

ISOMETRIC

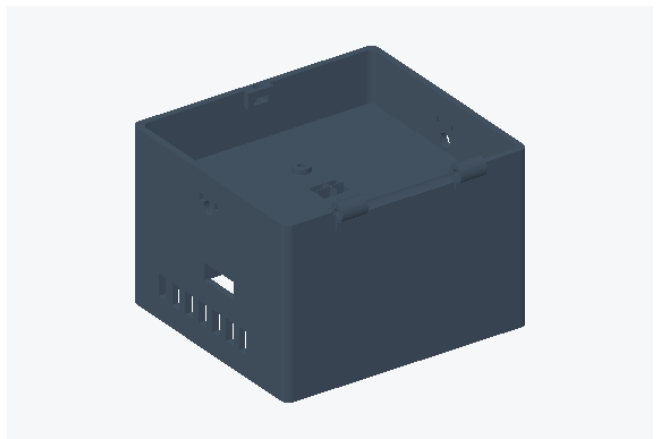


X 114.00 | Y 109.00 mm

Material:PC_GF_BLACK. Assembly minimum(mm):[-57.0, -52.0, 3.0]. Printable STLs are translated to positive coordinates; do not assemble them by overlapping print origins.

02_service_tray


02_service_tray

TOP

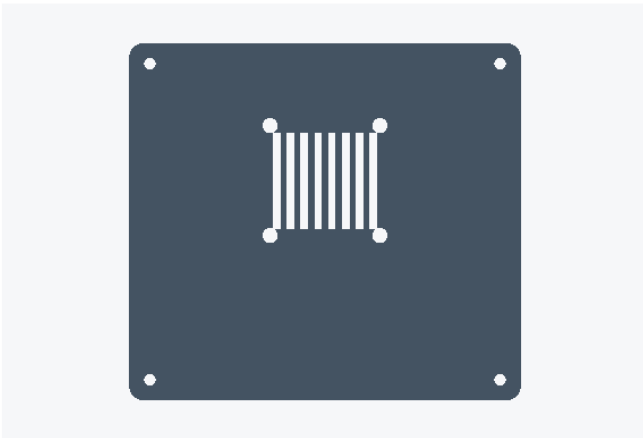


X 114.00 | Y 104.00 mm

FRONT

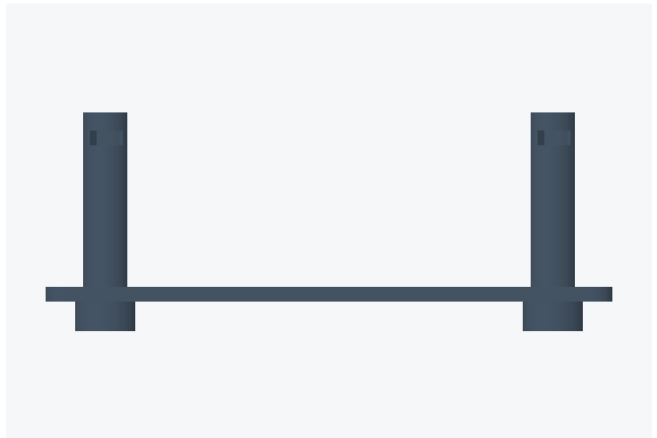


X 114.00 | Z 44.00 mm

RIGHT

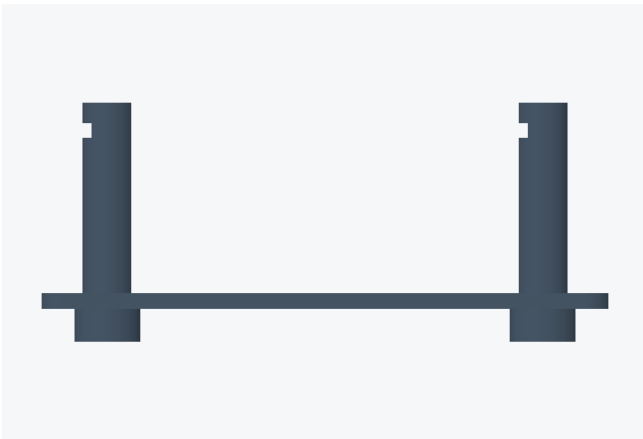

Y 104.00 | Z 44.00 mm

ISOMETRIC

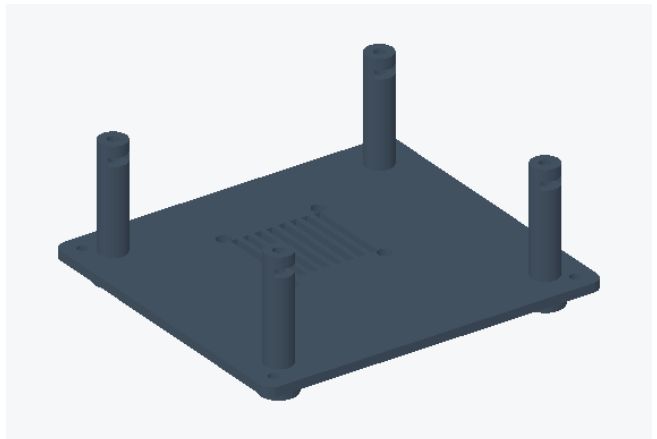


X 114.00 | Y 104.00 mm

Material:AQUA_8K_GRAY. Assembly minimum(mm):[-57.0, -52.0, -6.0]. Printable STLs are translated to positive coordinates; do not assemble them by overlapping print origins.

03_hinged_lid


03_hinged_lid

TOP

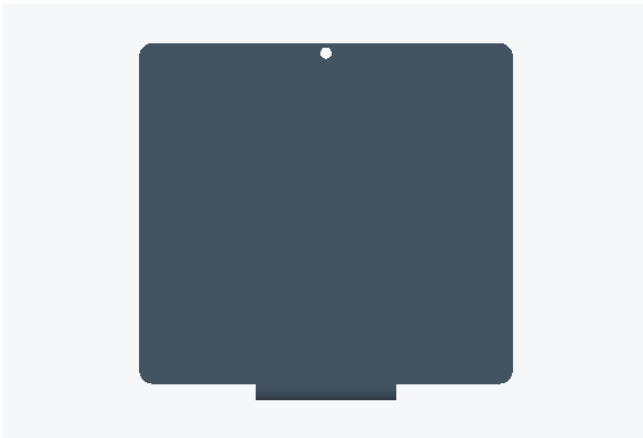


X 114.00 | Y 109.00 mm

FRONT

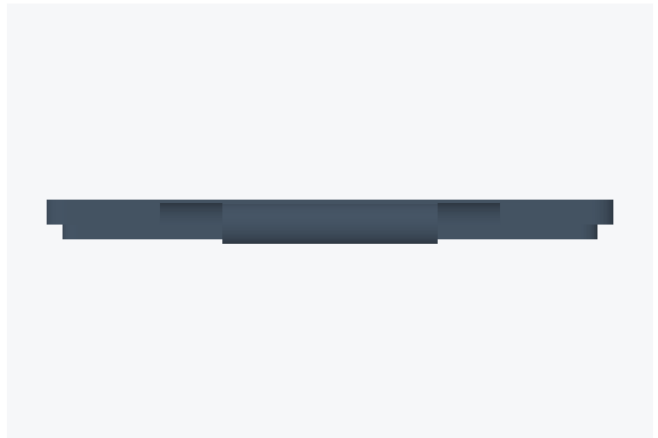


X 114.00 | Z 9.00 mm

RIGHT

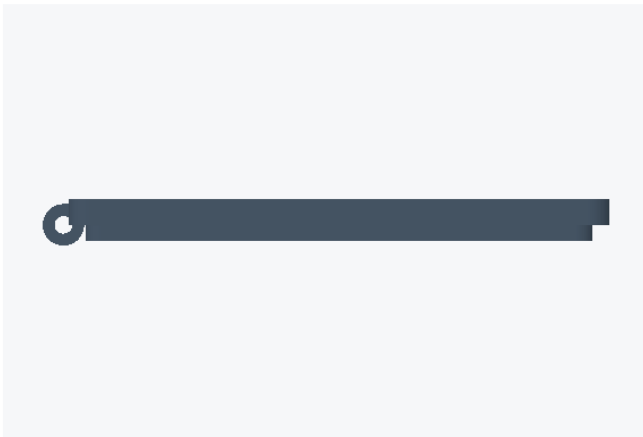

Y 109.00 | Z 9.00 mm

ISOMETRIC

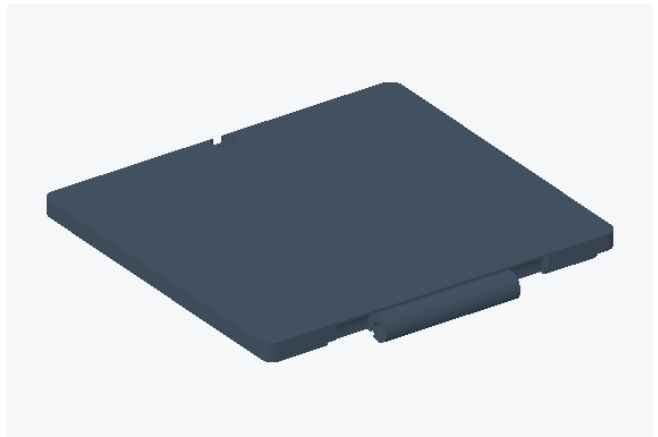


X 114.00 | Y 109.00 mm

Material:PC_GF_BLACK. Assembly minimum(mm):[-57.0, -52.0, 76.0]. Printable STLs are translated to positive coordinates; do not assemble them by overlapping print origins.

05_well_NE_CLEAR

05_well_NE_CLEAR

TOP

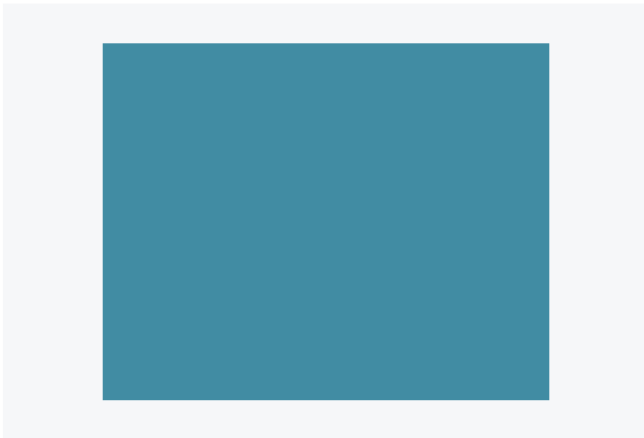

X 6.50 | Y 5.20 mm

FRONT




X 6.50 | Z 15.80 mm

RIGHT



Y 5.20 | Z 15.80 mm

ISOMETRIC

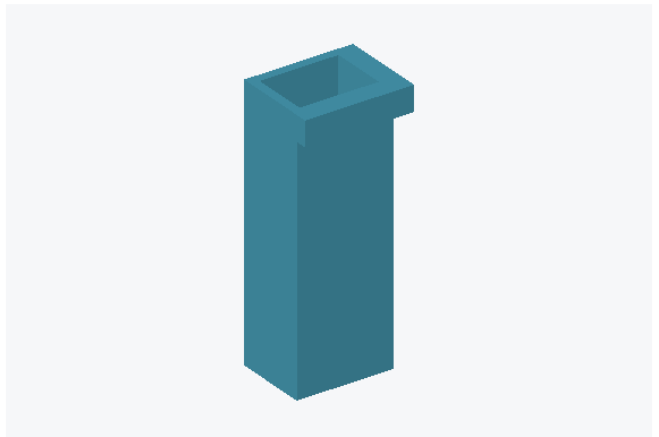


X 6.50 | Y 5.20 mm

Material:AQUA_CLEAR_PLUS_TEST_ONLY. Assembly minimum(mm):[0.4, 0.4, 42.5]. Printable STLs are translated to positive coordinates; do not assemble them by overlapping print origins.

05_well_NW_CLEAR

05_well_NW_CLEAR

TOP

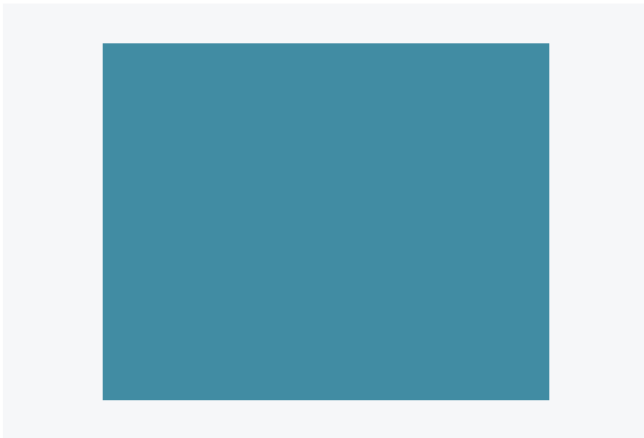

X 6.50 | Y 5.20 mm

FRONT




X 6.50 | Z 15.80 mm

RIGHT



Y 5.20 | Z 15.80 mm

ISOMETRIC

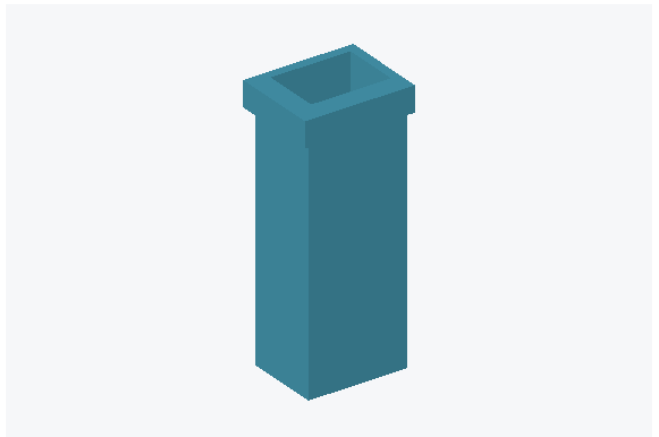


X 6.50 | Y 5.20 mm

Material:AQUA_CLEAR_PLUS_TEST_ONLY. Assembly minimum(mm):[-6.9, 0.4, 42.5]. Printable STLs are translated to positive coordinates; do not assemble them by overlapping print origins.

05_well_SW_CLEAR

05_well_SW_CLEAR

TOP

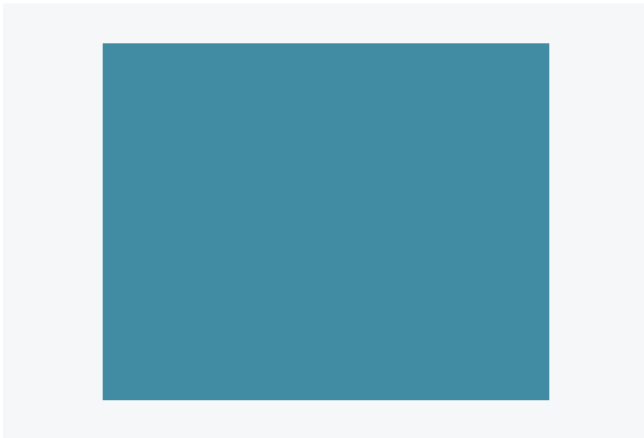

X 6.50 | Y 5.20 mm

FRONT




X 6.50 | Z 15.80 mm

RIGHT



Y 5.20 | Z 15.80 mm

ISOMETRIC

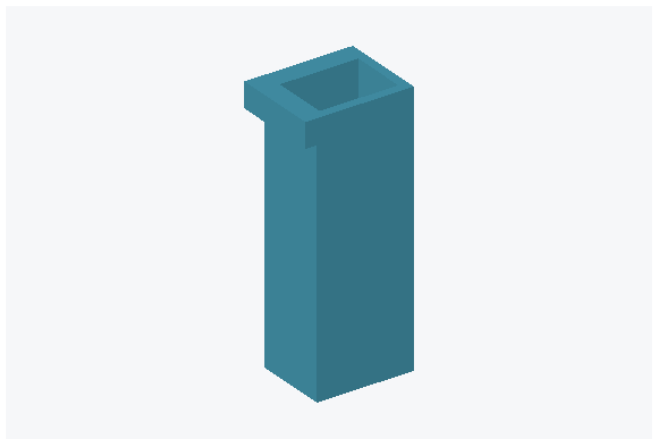


X 6.50 | Y 5.20 mm

Material:AQUA_CLEAR_PLUS_TEST_ONLY. Assembly minimum(mm):[-6.9, -5.6, 42.5]. Printable STLs are translated to positive coordinates; do not assemble them by overlapping print origins.

05_well_SE_CLEAR

05_well_SE_CLEAR

TOP

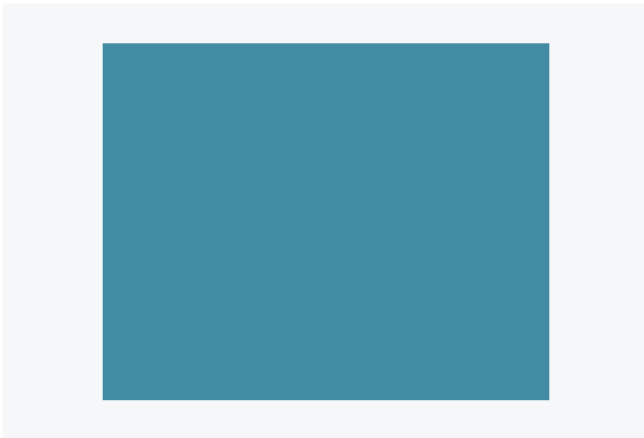

X 6.50 | Y 5.20 mm

FRONT




X 6.50 | Z 15.80 mm

RIGHT



Y 5.20 | Z 15.80 mm

ISOMETRIC

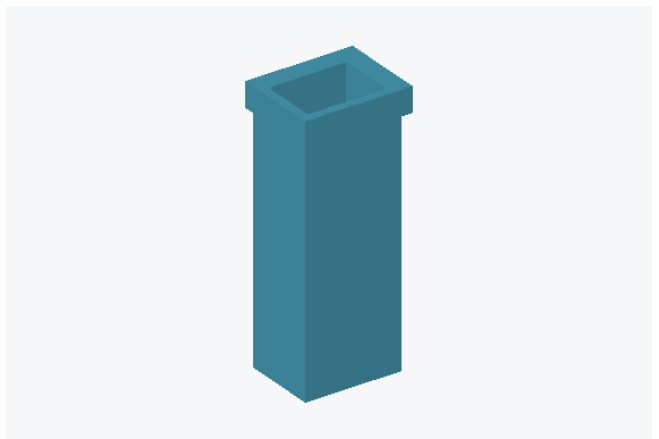


X 6.50 | Y 5.20 mm

Material:AQUA_CLEAR_PLUS_TEST_ONLY. Assembly minimum(mm):[0.4, -5.6, 42.5]. Printable STLs are translated to positive coordinates; do not assemble them by overlapping print origins.

04_common_gas_optical_cap

04_common_gas_optical_cap

TOP

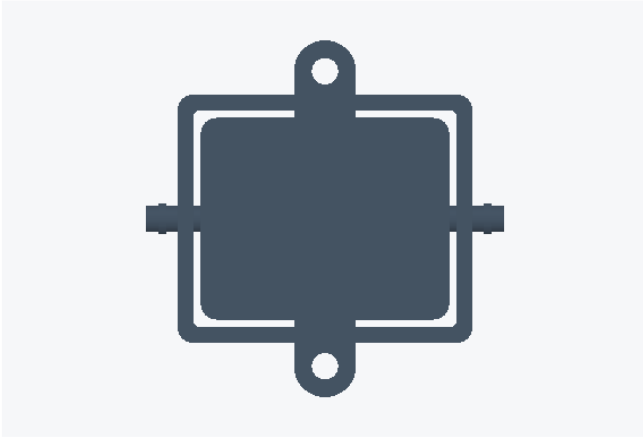

X 46.00 | Y 46.00 mm

FRONT




X 46.00 | Z 12.20 mm

RIGHT



Y 46.00 | Z 12.20 mm

ISOMETRIC

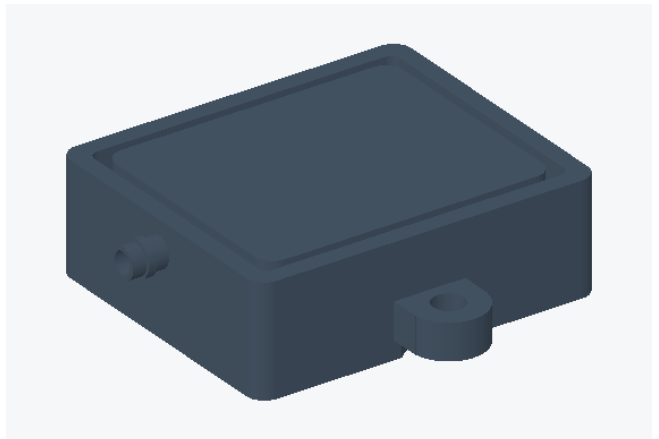

X 46.00 | Y 46.00 mm

Material:PC_GF_BLACK. Assembly minimum(mm):[-23.0, -23.0, 56.8]. Printable STLs are translated to positive coordinates; do not assemble them by overlapping print origins.