



1_Instalar wireshark máquina 199

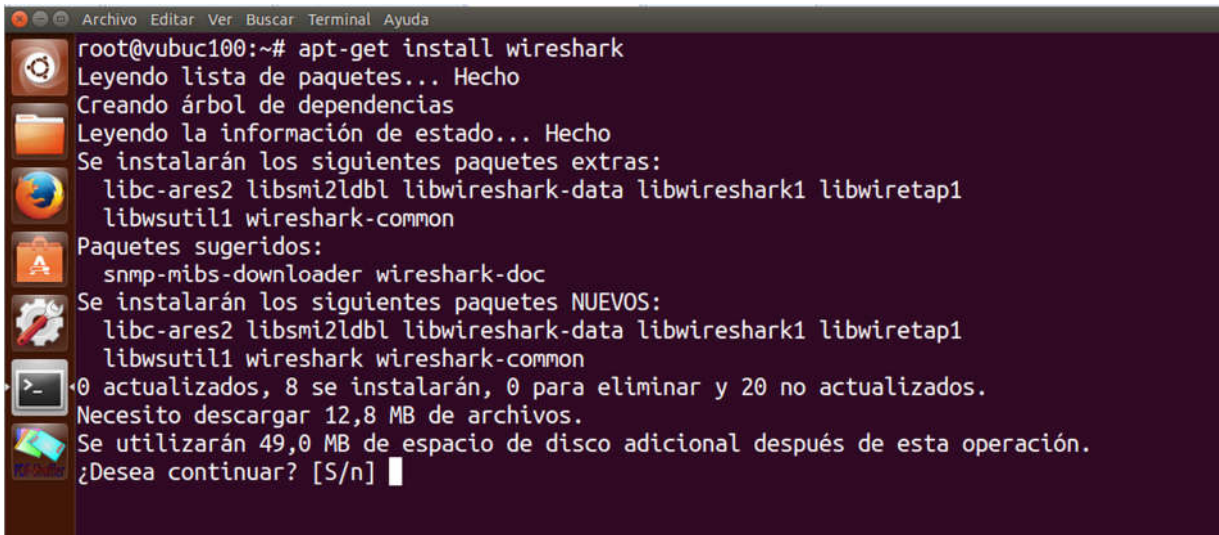


```
root@vubuc100:~# apt-get install wireshark
Leyendo lista de paquetes... Hecho
Creando árbol de dependencias
Leyendo la información de estado... Hecho
Se instalarán los siguientes paquetes extras:
  libc-ares2 libsmi2ldbl libwireshark-data libwireshark1 libwiretap1
  libwsutil1 wireshark-common
Paquetes sugeridos:
  snmp-mibs-downloader wireshark-doc
Se instalarán los siguientes paquetes NUEVOS:
  libc-ares2 libsmi2ldbl libwireshark-data libwireshark1 libwiretap1
  libwsutil1 wireshark wireshark-common
0 actualizados, 8 se instalarán, 0 para eliminar y 20 no actualizados.
Necesito descargar 12,8 MB de archivos.
Se utilizarán 49,0 MB de espacio de disco adicional después de esta operación.
¿Desea continuar? [S/n]
```

2_Instalar telnet máquina 199

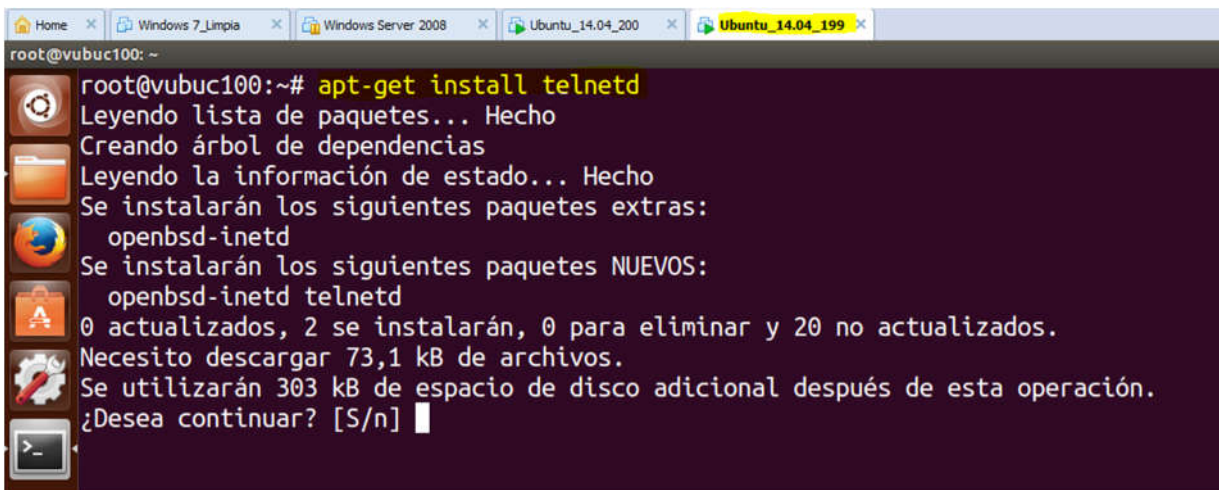


```
root@vubuc100:~# apt-get install telnetd
Leyendo lista de paquetes... Hecho
Creando árbol de dependencias
Leyendo la información de estado... Hecho
Se instalarán los siguientes paquetes extras:
  openbsd-inetd
Se instalarán los siguientes paquetes NUEVOS:
  openbsd-inetd telnetd
0 actualizados, 2 se instalarán, 0 para eliminar y 20 no actualizados.
Necesito descargar 73,1 kB de archivos.
Se utilizarán 303 kB de espacio de disco adicional después de esta operación.
¿Desea continuar? [S/n]
```


3_Lanzar wireshark de forma gráfica como root

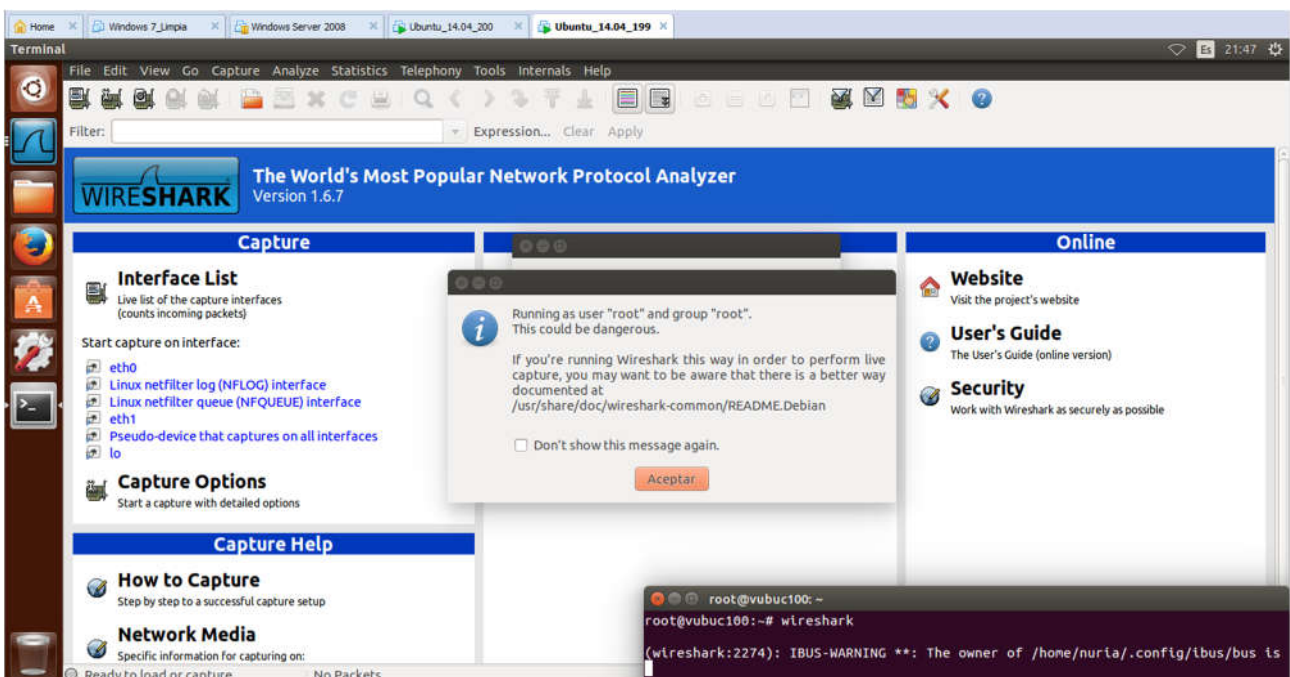

4_Elegir la interface

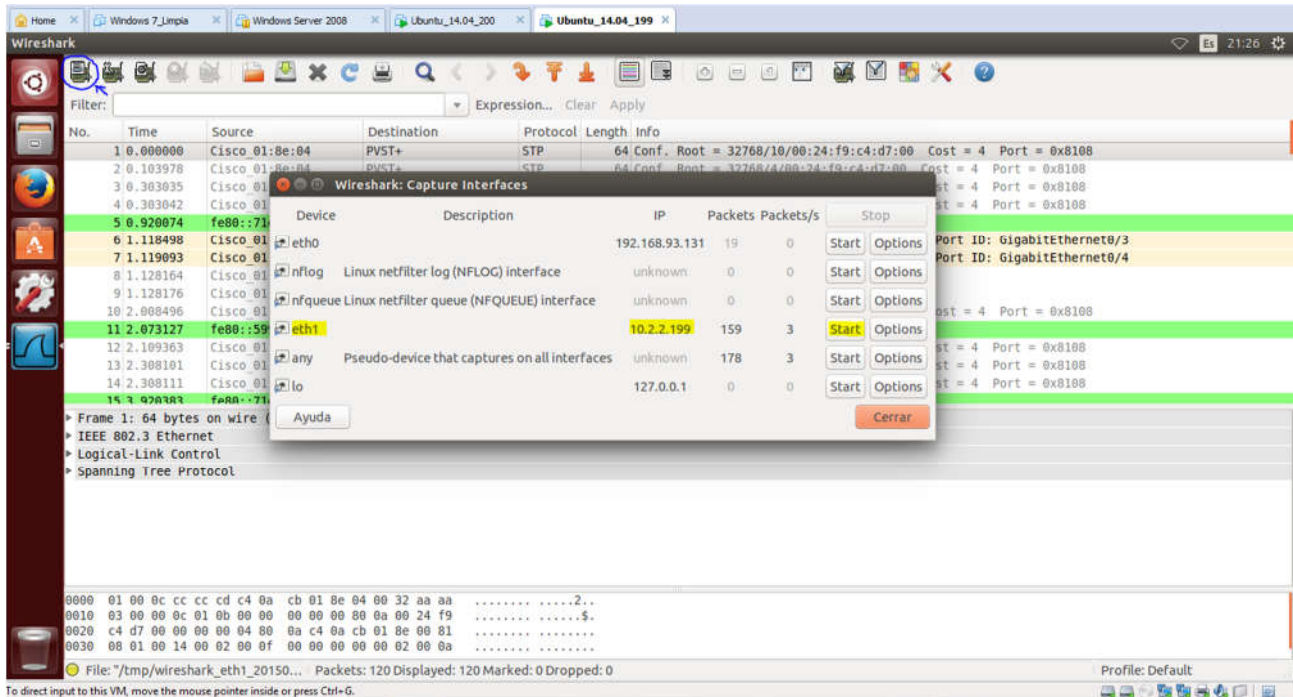

5_telnet capturando con wireshark

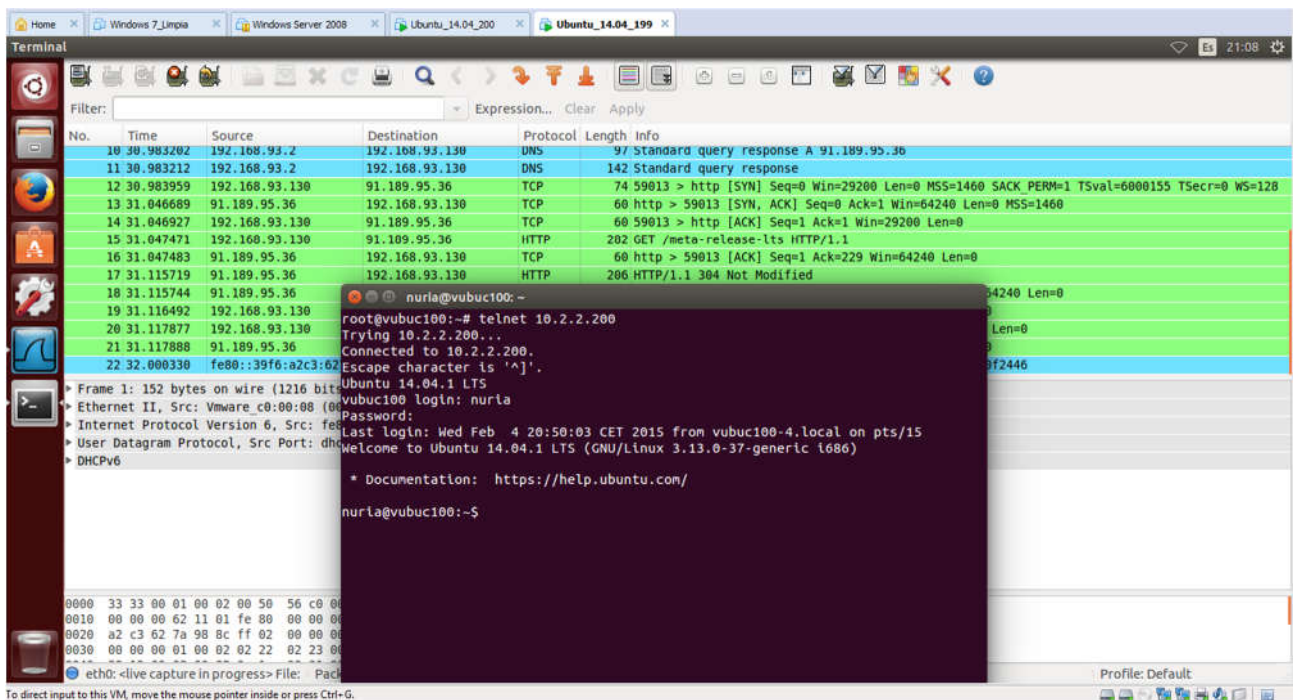

6_Filtro telnet

Wireshark interface showing a packet list filtered for Telnet. The packet list shows several Telnet packets from 10.2.2.200 to 10.2.2.199. The packet details pane shows the structure of a Telnet packet: Ethernet II, Internet Protocol Version 4, Transmission Control Protocol, and Telnet.

Filter: Expression... Clear Apply

Wireshark: Find Packet

Find

By: ☒ Display filter ☐ Hex value ☐ String

Filter:

Search in

☒ Packet list ☐ Packet details ☐ Packet bytes

String Options

☐ Case sensitive

Character set:

Direction

☒ Up ☐ Down

Ayuda Cancelar Buscar

Frame 205: 137 bytes on wire (1096 bits), 137 byte captured (1096 bits) on interface eth1

Ethernet II, Src: Vmware 42:d2:92 (00:0c:29:42:d2:92), Dst: Vmware a7:e8:f8 (00:0c:29:a7:e8:f8)

Internet Protocol Version 4, Src: 10.2.2.200 (10.2.2.200), Dst: 10.2.2.199 (10.2.2.199)

Transmission Control Protocol, Src Port: telnet (23), Dst Port: 38630 (38630), Seq: 113, Ack: 128, Len: 71

Telnet

Data: Last login: Wed Feb 4 21:07:58 CET 2015 from vubuc100-3.local on pts/1

0000 00 0c 29 a7 e8 f8 00 0c 29 42 d2 92 08 00 45 10 ..).... }B....E.

0010 00 7b bf e6 40 00 00 06 60 f4 0a 02 02 c8 0a 02 ..@.@.

0020 02 c7 00 17 96 e6 0c 4f d1 40 d8 04 b1 22 80 180 .@...+..

0030 00 e3 fc 4f 00 00 01 01 08 0a 00 5d 75 e7 00 5c]qZ.\

File: /tmp/wireshark_eth1_20150... Packets: 292 Displayed: 292 Marked: 0 Dropped: 0

Profile: Default

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

7_Empezamos a capturar la contraseña

Wireshark interface showing a packet list filtered for Telnet. The packet list shows several Telnet packets from 10.2.2.200 to 10.2.2.199. The packet details pane shows the structure of a Telnet packet: Ethernet II, Internet Protocol Version 4, Transmission Control Protocol, and Telnet.

Filter: Expression... Clear Apply

Wireshark: Find Packet

Find

By: ☒ Display filter ☐ Hex value ☐ String

Filter:

Search in

☒ Packet list ☐ Packet details ☐ Packet bytes

String Options

☐ Case sensitive

Character set:

Direction

☒ Up ☐ Down

Ayuda Cancelar Buscar

Frame 163: 78 bytes on wire (624 bits), 78 bytes captured (624 bits) on interface eth1

Ethernet II, Src: Vmware 42:d2:92 (00:0c:29:42:d2:92), Dst: Vmware a7:e8:f8 (00:0c:29:a7:e8:f8)

Internet Protocol Version 4, Src: 10.2.2.200 (10.2.2.200), Dst: 10.2.2.199 (10.2.2.199)

Transmission Control Protocol, Src Port: telnet (23), Dst Port: 38630 (38630), Seq: 99, Ack: 119, Len: 12

Telnet

Data: \r\n

Data: Password:

0000 00 0c 29 a7 e8 f8 00 0c 29 42 d2 92 08 00 45 10 ..).... }B....E.

0010 00 40 bf dc 40 00 00 06 61 39 0a 02 02 c8 0a 02 ..@.@. a9.....

0020 02 c7 00 17 96 e6 0c 4f d1 32 d8 04 b1 22 80 180 .2...+..

0030 00 e3 b2 fc 00 00 01 01 08 0a 00 5d 71 5a 00 5c]qZ.\

File: /tmp/wireshark_eth1_20150... Packets: 292 Displayed: 292 Marked: 0 Dropped: 0

Profile: Default

To direct input to this VM, move the mouse pointer inside or press Ctrl+G.

8_Primer carácter

The screenshot shows a Wireshark 1.6.7 interface with a capture on the eth1 interface. The packet list shows a series of Telnet data packets. Packet 175 is selected, showing details for Ethernet II, Internet Protocol Version 4, and Transmission Control Protocol. The Telnet data field is expanded, showing the character 'M'.

No.	Time	Source	Destination	Protocol	Length	Info
240	27.414493	10.2.2.200	10.2.2.199	TELNET	67	Telnet Data ...
247	27.414019	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
211	20.627430	10.2.2.200	10.2.2.199	TELNET	106	Telnet Data ...
207	20.221874	10.2.2.200	10.2.2.199	TELNET	183	Telnet Data ...
205	20.221047	10.2.2.200	10.2.2.199	TELNET	137	Telnet Data ...
203	20.172124	10.2.2.200	10.2.2.199	TELNET	68	Telnet Data ...
201	20.168766	10.2.2.199	10.2.2.200	TELNET	68	Telnet Data ...
196	19.790126	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
193	19.531507	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
191	19.343028	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
189	19.117518	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
186	18.711595	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
183	18.379341	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
175	17.421412	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
163	15.563301	10.2.2.200	10.2.2.199	TELNET	78	Telnet Data ...

Frame 175: 67 bytes on wire (536 bits), 67 bytes captured (536 bits)
Ethernet II, Src: Vmware_a7:e8:f8 (00:0c:29:a7:e8:f8), Dst: Vmware_42:d2:92 (00:0c:29:42:d2:92)
Internet Protocol Version 4, Src: 10.2.2.199 (10.2.2.199), Dst: 10.2.2.200 (10.2.2.200)
Transmission Control Protocol, Src Port: 38630 (38630), Dst Port: telnet (23), Seq: 119, Ack: 111, Len: 1
Telnet
Data: M

0000 00 0c 29 42 d2 92 00 0c 29 a7 e8 f8 00 00 45 10 ..)B....}.....E.
0010 00 35 f2 da 40 00 40 06 2e 46 0a 02 02 c7 0a 02 .S..@.@.F.....
0020 02 c8 96 e6 00 17 d8 04 b1 22 0c 4f d1 3e 80 18#.0.>..
0030 00 e5 58 fb 00 00 01 01 08 0a 00 5c 46 7b 00 5d ..X.....\F{.]

File: /tmp/wireshark_eth1_20150... Packets: 292 Displayed: 292 Marked: 0 Dropped: 0

9_Siguiente carácter

The screenshot shows the same Wireshark 1.6.7 interface, but now packet 183 is selected. The details pane shows the Telnet data field expanded, displaying the character '@'.

No.	Time	Source	Destination	Protocol	Length	Info
240	27.414493	10.2.2.200	10.2.2.199	TELNET	67	Telnet Data ...
247	27.414019	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
211	20.627430	10.2.2.200	10.2.2.199	TELNET	106	Telnet Data ...
207	20.221874	10.2.2.200	10.2.2.199	TELNET	183	Telnet Data ...
205	20.221047	10.2.2.200	10.2.2.199	TELNET	137	Telnet Data ...
203	20.172124	10.2.2.200	10.2.2.199	TELNET	68	Telnet Data ...
201	20.168766	10.2.2.199	10.2.2.200	TELNET	68	Telnet Data ...
196	19.790126	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
193	19.531507	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
191	19.343028	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
189	19.117518	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
186	18.711595	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
183	18.379341	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
175	17.421412	10.2.2.199	10.2.2.200	TELNET	67	Telnet Data ...
163	15.563301	10.2.2.200	10.2.2.199	TELNET	78	Telnet Data ...

Frame 183: 67 bytes on wire (536 bits), 67 bytes captured (536 bits)
Ethernet II, Src: Vmware_a7:e8:f8 (00:0c:29:a7:e8:f8), Dst: Vmware_42:d2:92 (00:0c:29:42:d2:92)
Internet Protocol Version 4, Src: 10.2.2.199 (10.2.2.199), Dst: 10.2.2.200 (10.2.2.200)
Transmission Control Protocol, Src Port: 38630 (38630), Dst Port: telnet (23), Seq: 120, Ack: 111, Len: 1
Telnet
Data: @

0000 00 0c 29 42 d2 92 00 0c 29 a7 e8 f8 00 00 45 10 ..)B....}.....E.
0010 00 35 f2 db 40 00 40 06 2e 45 0a 02 02 c7 0a 02 .S..@.@.E.....
0020 02 c8 96 e6 00 17 d8 04 b1 23 0c 4f d1 3e 80 18#.0.>..
0030 00 e5 63 30 00 00 01 01 08 0a 00 5c 47 6a 00 5d ..c0.....\G.]

File: /tmp/wireshark_eth1_20150... Packets: 292 Displayed: 292 Marked: 0 Dropped: 0

10_Siguiente carácter

Wireshark 1.6.7 capture on eth1. The selected packet (No. 186) is a Telnet packet from 10.2.2.199 to 10.2.2.200. The packet details pane shows the following structure:

- Frame 186: 67 bytes on wire (536 bits), 67 bytes captured (536 bits)
- Ethernet II, Src: Vmware a7:e8:f8 (00:0c:29:a7:e8:f8), Dst: Vmware 42:d2:92 (00:0c:29:42:d2:92)
- Internet Protocol Version 4, Src: 10.2.2.199 (10.2.2.199), Dst: 10.2.2.200 (10.2.2.200)
- Transmission Control Protocol, Src Port: 38630 (38630), Dst Port: telnet (23), Seq: 121, Ack: 111, Len: 1
- Telnet

The packet bytes pane shows the raw data in hexadecimal and ASCII:

```
0000 00 0c 29 42 d2 92 00 0c 29 a7 e8 f8 00 00 45 10 ..)B....E.
0010 00 35 f2 dc 40 00 40 06 2e 44 0a 02 02 c7 0a 02 .5..@.@.D.....
0020 02 c8 96 e6 00 17 d8 04 b1 24 0c 4f d1 3e 80 18 .....$.0.>..
0030 00 e5 2f f6 00 00 01 01 08 0a 00 5c 47 bd 00 5d ../>.....\G..]
```

11_Siguiente carácter

Wireshark 1.6.7 capture on eth1. The selected packet (No. 189) is a Telnet packet from 10.2.2.199 to 10.2.2.200. The packet details pane shows the following structure:

- Frame 189: 67 bytes on wire (536 bits), 67 bytes captured (536 bits)
- Ethernet II, Src: Vmware a7:e8:f8 (00:0c:29:a7:e8:f8), Dst: Vmware 42:d2:92 (00:0c:29:42:d2:92)
- Internet Protocol Version 4, Src: 10.2.2.199 (10.2.2.199), Dst: 10.2.2.200 (10.2.2.200)
- Transmission Control Protocol, Src Port: 38630 (38630), Dst Port: telnet (23), Seq: 122, Ack: 111, Len: 1
- Telnet

The packet bytes pane shows the raw data in hexadecimal and ASCII:

```
0000 00 0c 29 42 d2 92 00 0c 29 a7 e8 f8 00 00 45 10 ..)B....E.
0010 00 35 f2 dd 40 00 40 06 2e 43 0a 02 02 c7 0a 02 .5..@.@.C.....
0020 02 c8 96 e6 00 17 d8 04 b1 25 0c 4f d1 3e 80 18 .....$.0.>..
0030 00 e5 3e 3c 00 00 01 01 08 0a 00 5c 48 23 00 5d ..>.....\H#.]
```

12_Siguiente carácter

The screenshot shows a Wireshark 1.6.7 interface with a packet capture on the eth1 interface. The packet list shows a series of Telnet data packets. Packet 191 is selected, showing details for Ethernet II, Internet Protocol Version 4, and Transmission Control Protocol. The Telnet data field is expanded, showing the sequence of bytes: 0000 00 0c 29 42 d2 92 00 0c 29 a7 e8 f8 08 00 45 10 ..)B....).....E. 0010 00 35 f2 de 40 00 40 06 2e 42 0a 02 02 c7 0a 02 .5..@.@. .B..... 0020 02 c8 96 e6 00 17 d8 04 b1 26 0c 4f d1 3e 80 186..0.>.. 0030 00 e5 3b 9e 00 00 01 01 08 0a 00 5c 48 5b 00 5d ...:.....\H[.]


File: /tmp/wireshark_eth1_20150... Packets: 292 Displayed: 292 Marked: 0 Dropped: 0

13_Siguiente carácter

The screenshot shows a Wireshark 1.6.7 interface with a packet capture on the eth1 interface. The packet list shows a series of Telnet data packets. Packet 193 is selected, showing details for Ethernet II, Internet Protocol Version 4, and Transmission Control Protocol. The Telnet data field is expanded, showing the sequence of bytes: 0000 00 0c 29 42 d2 92 00 0c 29 a7 e8 f8 08 00 45 10 ..)B....).....E. 0010 00 35 f2 df 40 00 40 06 2e 41 0a 02 02 c7 0a 02 .5..@.@. .A..... 0020 02 c8 96 e6 00 17 d8 04 b1 27 0c 4f d1 3e 80 186..0.>.. 0030 00 e5 34 36 00 00 01 01 08 0a 00 5c 48 8a 00 5d ..46.....\H[.]


File: /tmp/wireshark_eth1_20150... Packets: 292 Displayed: 292 Marked: 0 Dropped: 0

14_Siguiente carácter

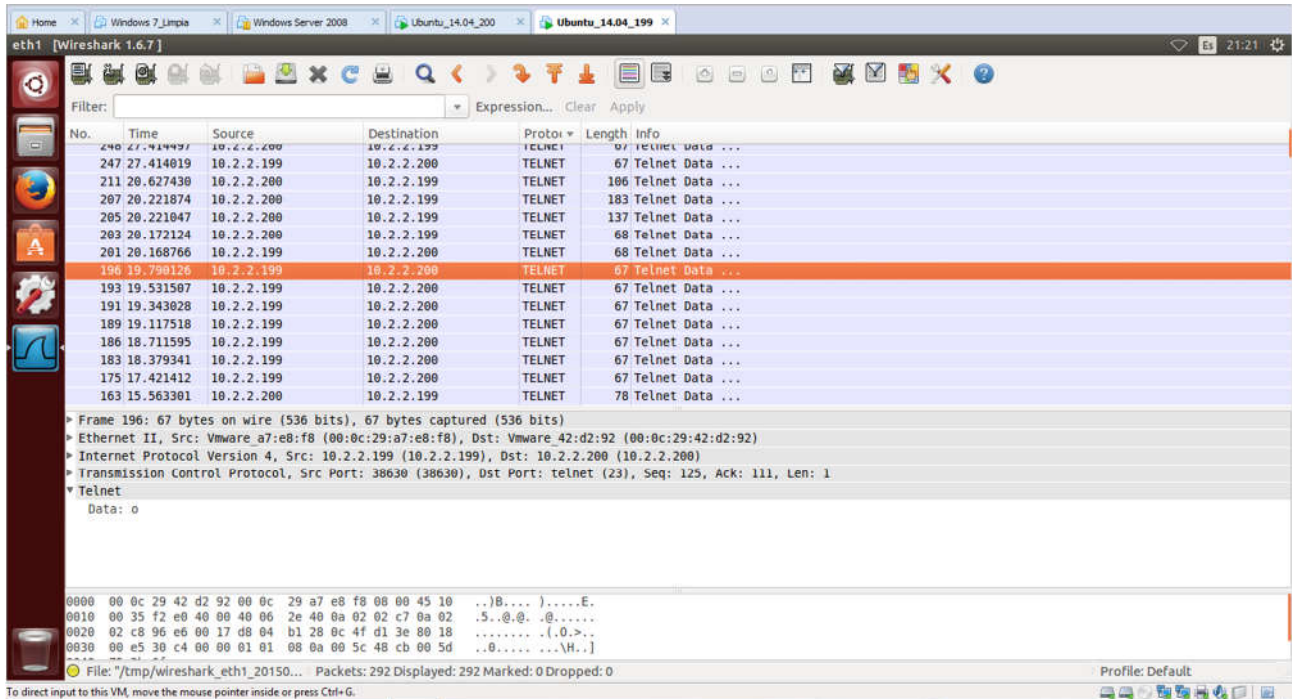


Contraseña: **M@rcelo**

15_ssh capturando con wireshark

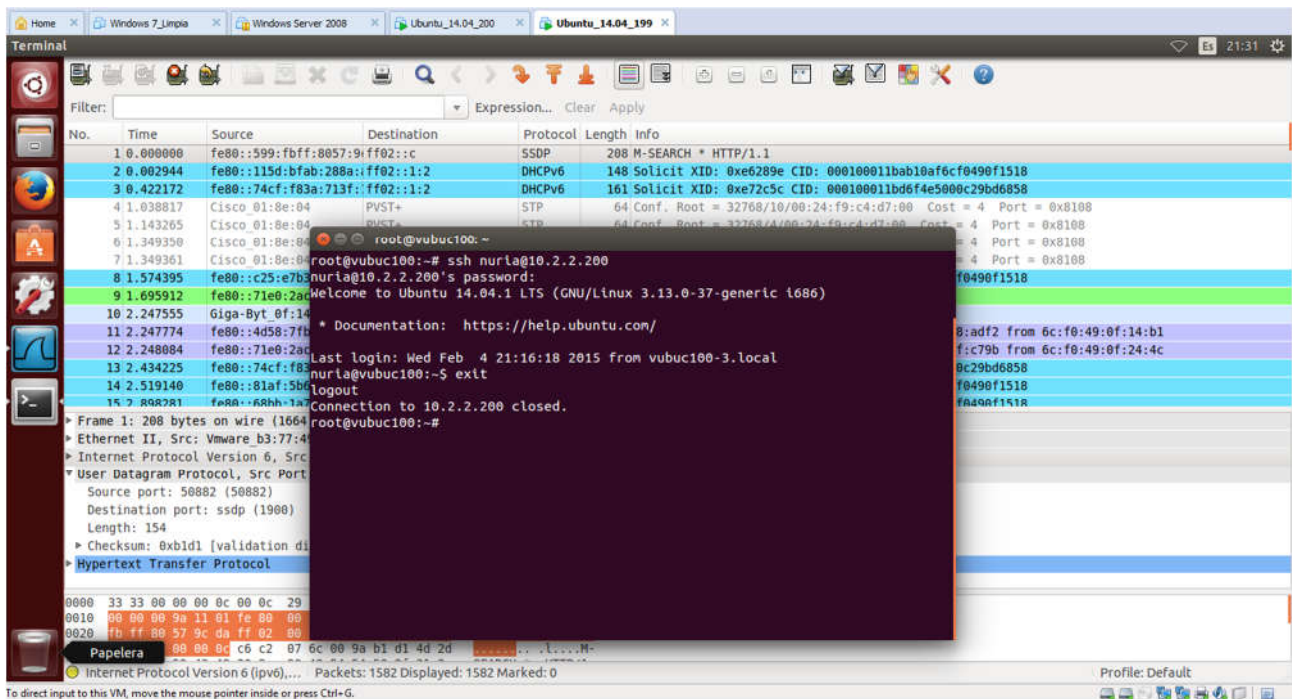

16_Filtro ssh

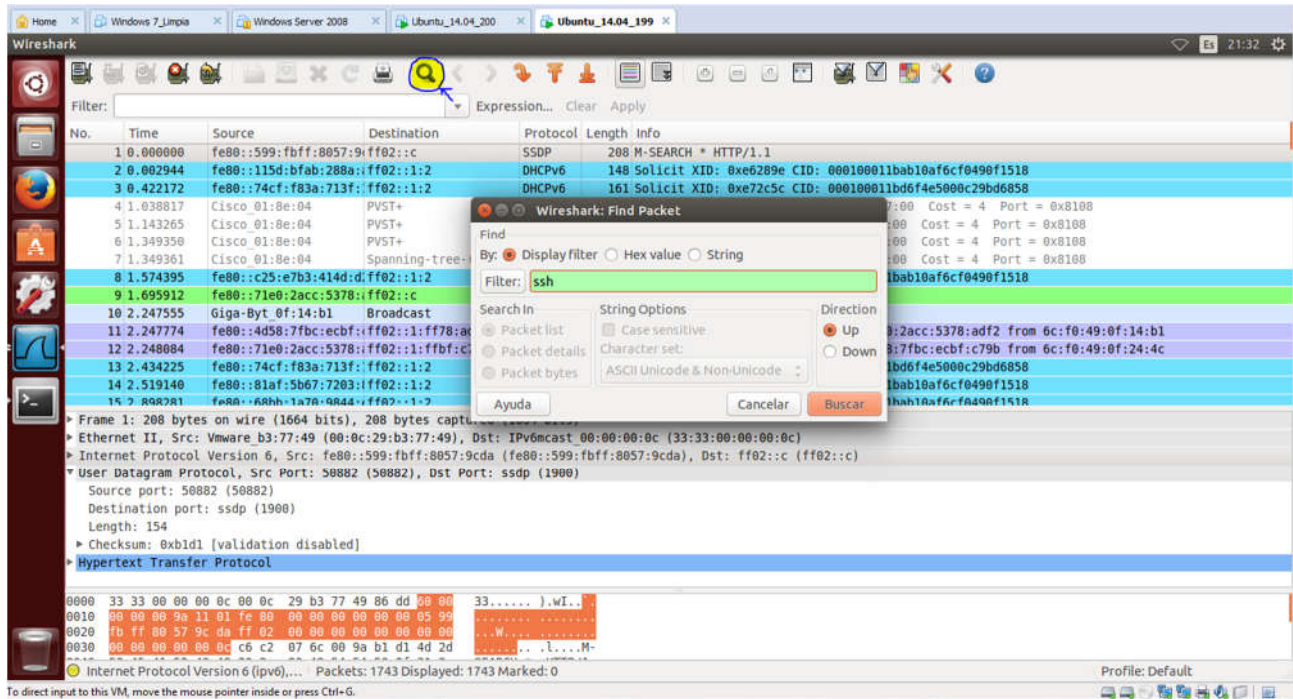

17_Captura ssh

