



## ENGINEERING EXCELLENCE

### Motegi Series #4MT210T

### SPECIFICATION SHEET

#### DESCRIPTION

- Single Handle Tub Trim Set
- Metal Lever Handle
- Ceramic Disc Cartridge with Temperature Limit Stop
- 1/2" IPS Tub Spout
- 7-1/2" Spout Reach, Tub Spout Escutcheon
- Color Match Sleeve and Retaining Ring

#### FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel
- PB PVD Polished Brass
- PN PVD Polished Nickel
- SS PVD Stainless Steel



#4MT200T SHOWN \* ADA

#### STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- CUPC / IAPMO LISTED / ADA COMPLIANT

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_

Model	Description	Finishes	
#4MT210T	Single Handle Tub Trim Set	<input type="checkbox"/> PC	<input type="checkbox"/> Other____
Required Valve			
#4020B	Single Handle Tub And Shower Valve Set	<input type="checkbox"/> N/A	



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468

Commerce, CA 90040

www.pioneerind.com


Pioneer Industries, Inc. © 2014

DMSP4MT210T/REV. 06 2014

Page 1 of 2

### Installation Note:

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

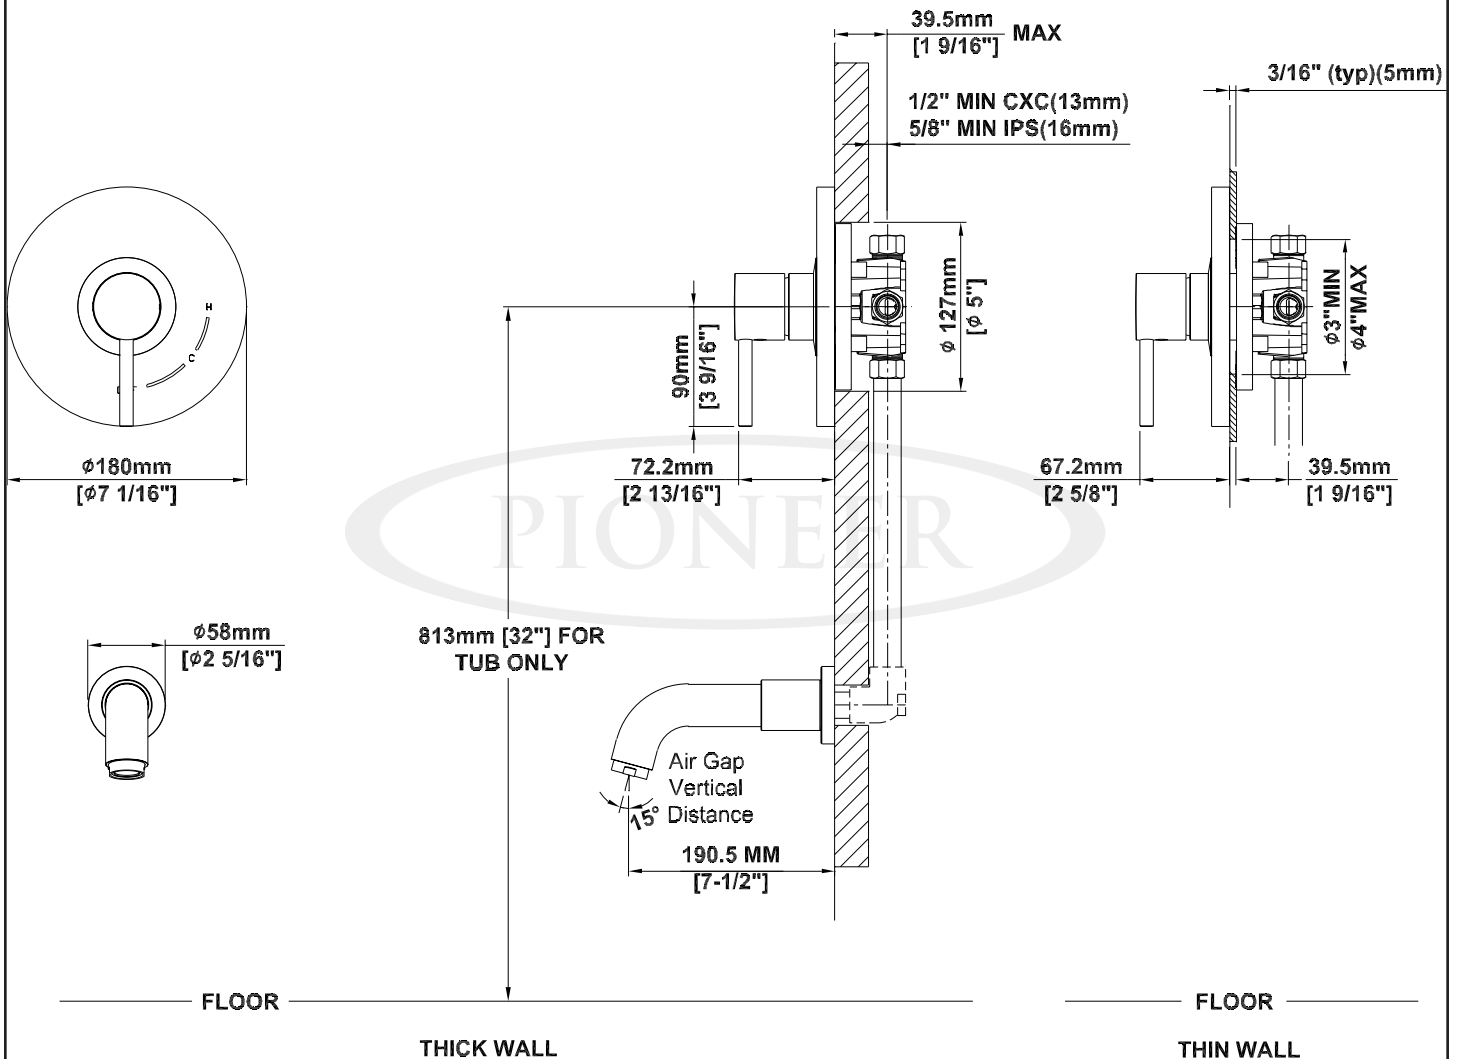

Product Diagram



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468

Commerce, CA 90040

www.pioneerind.com

Pioneer Industries, Inc. © 2014

DMSP4MT210T/REV. 06 2014

Page 2 of 2