



## ENGINEERING EXCELLENCE

### Motegi Series #4MT113T


### SPECIFICATION SHEET

#### DESCRIPTION

- Single Handle Tub and Shower Trim Set
- Metal Lever Handle
- Ceramic Disc Cartridge with Temperature Limit Stop
- Single Function Rain Showerhead
- Shower Arm and Flange
- 1/2" IPS Diverter Tub Spout
- 7-1/4" Spout Reach
- Color Match Sleeve and Retaining Ring

#### FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel
- PB PVD Polished Brass
- PN PVD Polished Nickel
- SS PVD Stainless Steel



#4MT113T SHOWN \* ADA

#### STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- ADA COMPLIANT

#### FLOW

- Showerhead Limited to 1.75 GPM Flow Rate

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_

Model	Description	Finishes	
#4MT113T	Single Handle Tub and Shower Trim Set	<input type="checkbox"/> PC	<input type="checkbox"/> Other____
Required Valve			
#4020B	Single Handle Tub And Shower Valve Set	<input type="checkbox"/> N/A	



ENGINEERING EXCELLENCE


Pioneer: 1-800-338-9468  
Commerce, CA 90040  
www.pioneerind.com  
Pioneer Industries, Inc. © 2012

DMSP4MT113T/REV. 06 2012

Page 1 of 2

## Installation Note:

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

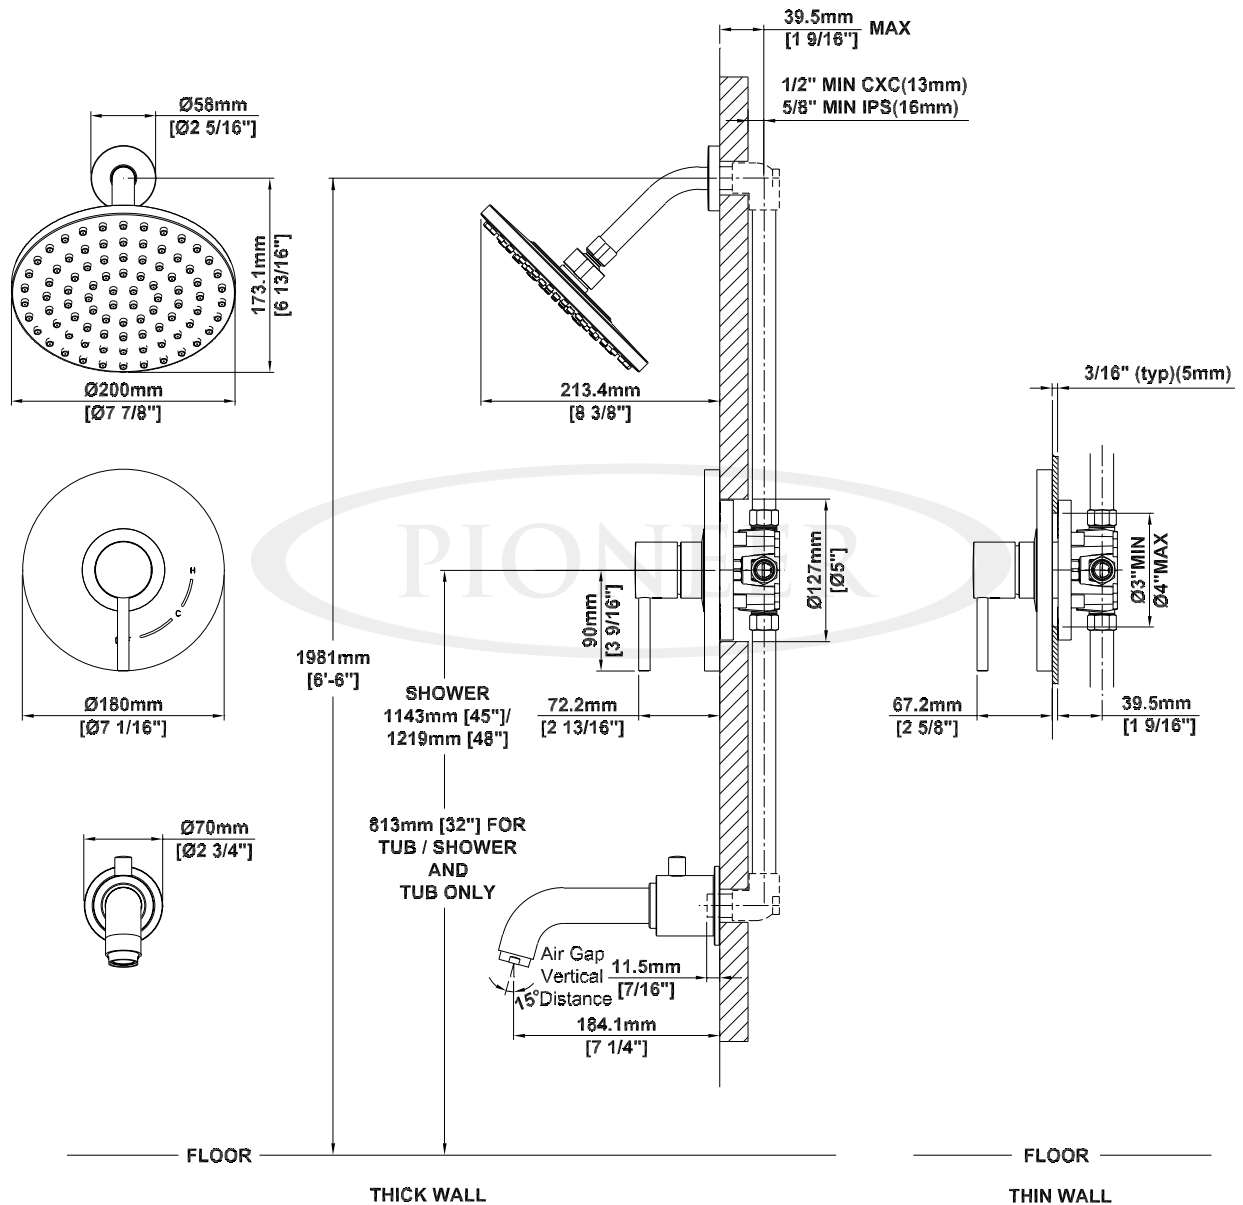

Product Diagram



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468

Commerce, CA 90040

www.pioneerind.com

Pioneer Industries, Inc. © 2012

DMSP4MT113T/REV. 06 2012

Page 2 of 2