

# PIONEER

## ENGINEERING EXCELLENCE


#4022B

SPECIFICATION SHEET

### DESCRIPTION

- Single Handle Pressure Balance Tub and Shower Valve Set
- 1/2" PEX Inlet & Shower Outlet W/Combo CXC & IPS Tub Outlet
- Cartridge, Sleeve, Lock nut, Retaining Ring Ships With Trim Kit
- Brass Inlet Stops
- Back to Back Installation

**Note:-** Valve can be tested with air (200 PSI) or water (300 PSI) without Cartridge using supplied test cap.

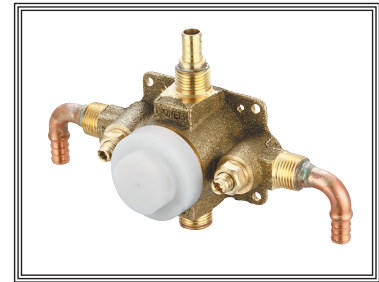


#4022B SHOWN

### STANDARDS APPLICABLE

- ASME A112.18.1
- ASSE 1016
- CUPC / IAPMO LISTED

**4022B Flow Rate (GPM) Vs Pressure (PSI)\***

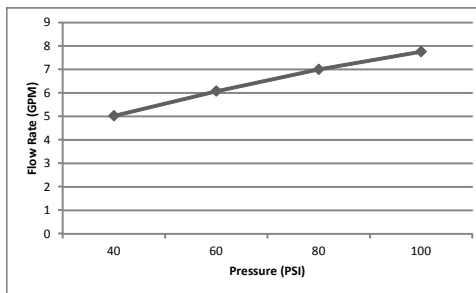

\*Note:- This information is provided for reference only. Actual Flow Rate may vary depending on installation and inlet pressures.

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_

Model	Description	Finishes
#4022B	Single Handle Tub and Shower Valve Set	<input type="checkbox"/> NA
#4022B-B	Single Handle Tub and Shower Valve Set-Builder Tract Pack	<input type="checkbox"/> NA




ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468  
Commerce, CA 90040  
www.pioneerind.com  
Pioneer Industries, Inc. © 2013

DMSP4022B/REV. 12 2012  
Page 1 of 2

**Installation Note:**

For thicker wall installation stem extension (X-4400088) is available. This will extend stem length by 1".

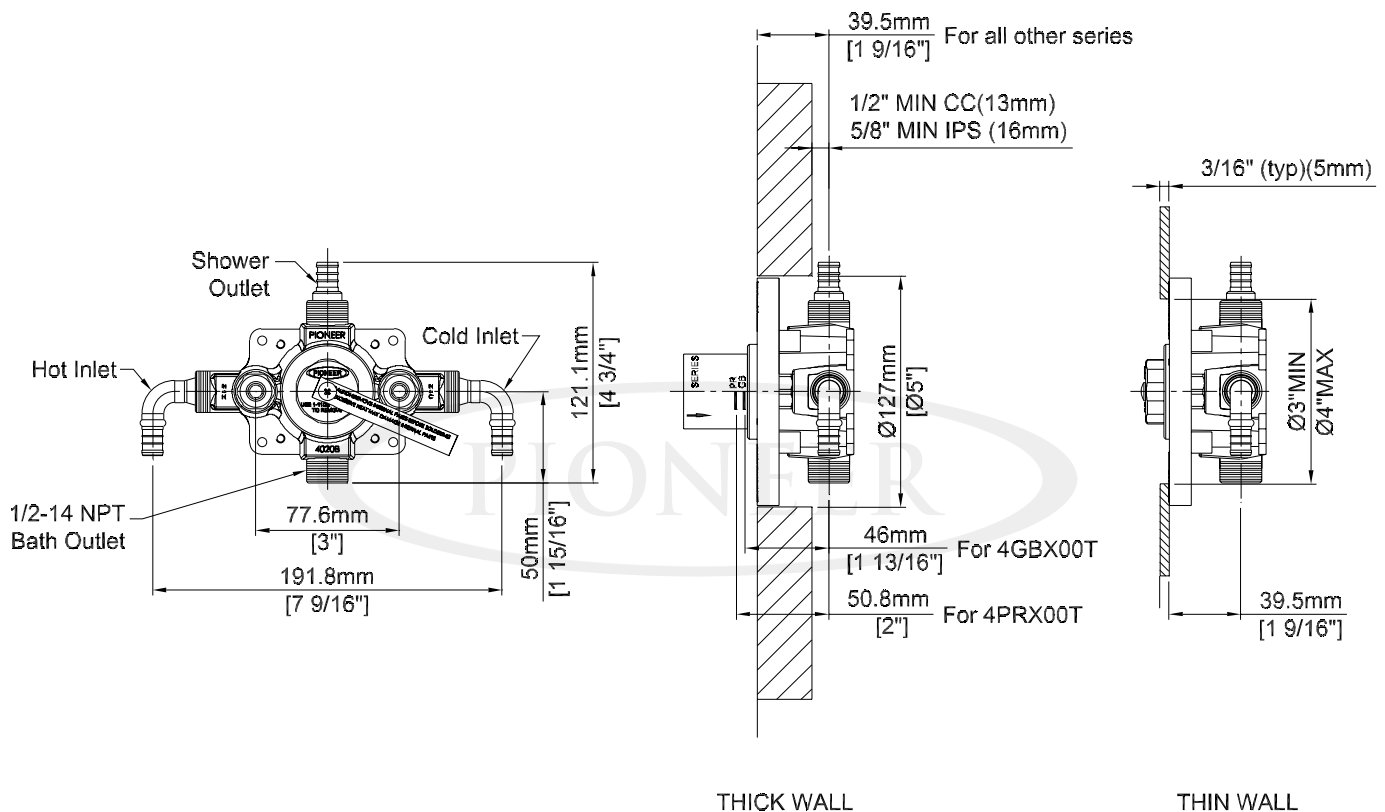**Product Diagram**

ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468

Commerce, CA 90040

www.pioneerind.com

Pioneer Industries, Inc. © 2013

DMSP4022B/REV. 12 2012

Page 2 of 2