



ENGINEERING EXCELLENCE

Motegi Series #4MT131T


SPECIFICATION SHEET

DESCRIPTION

- Single Handle Tub and Shower Trim Set
- Metal Lever Handle
- Ceramic Disc Cartridge with Temperature Limit Stop
- Single Function 6" Diameter Rain Showerhead
- Shower Arm and Flange
- Combo 1/2" IPS/Slip-On Diverter Tub Spout
- 7" Spout Reach
- Color Match Sleeve and Retaining Ring

FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel



#4MT131T SHOWN * ADA 

STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- ADA COMPLIANT

FLOW

- Showerhead Limited to 1.75 GPM Flow Rate

Model #: _____

Specific Features: _____

Project Name: _____

Submitted For: _____

| Model | Description | Finishes |
|----------------|--|--|
| #4MT131T | Single Handle Tub and Shower Trim Set | <input type="checkbox"/> PC <input type="checkbox"/> Other _____ |
| Required Valve | | |
| #4020B | Single Handle Tub And Shower Valve Set | |
| | | <input type="checkbox"/> N/A |




ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468
Commerce, CA 90040
www.pioneerind.com
Pioneer Industries, Inc. © 2012

DMSP4MT131T/REV. 02 2014
Page 1 of 2

Installation Note:

Please refer to Installation Guide For this Product And For the Rough-in-Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets.

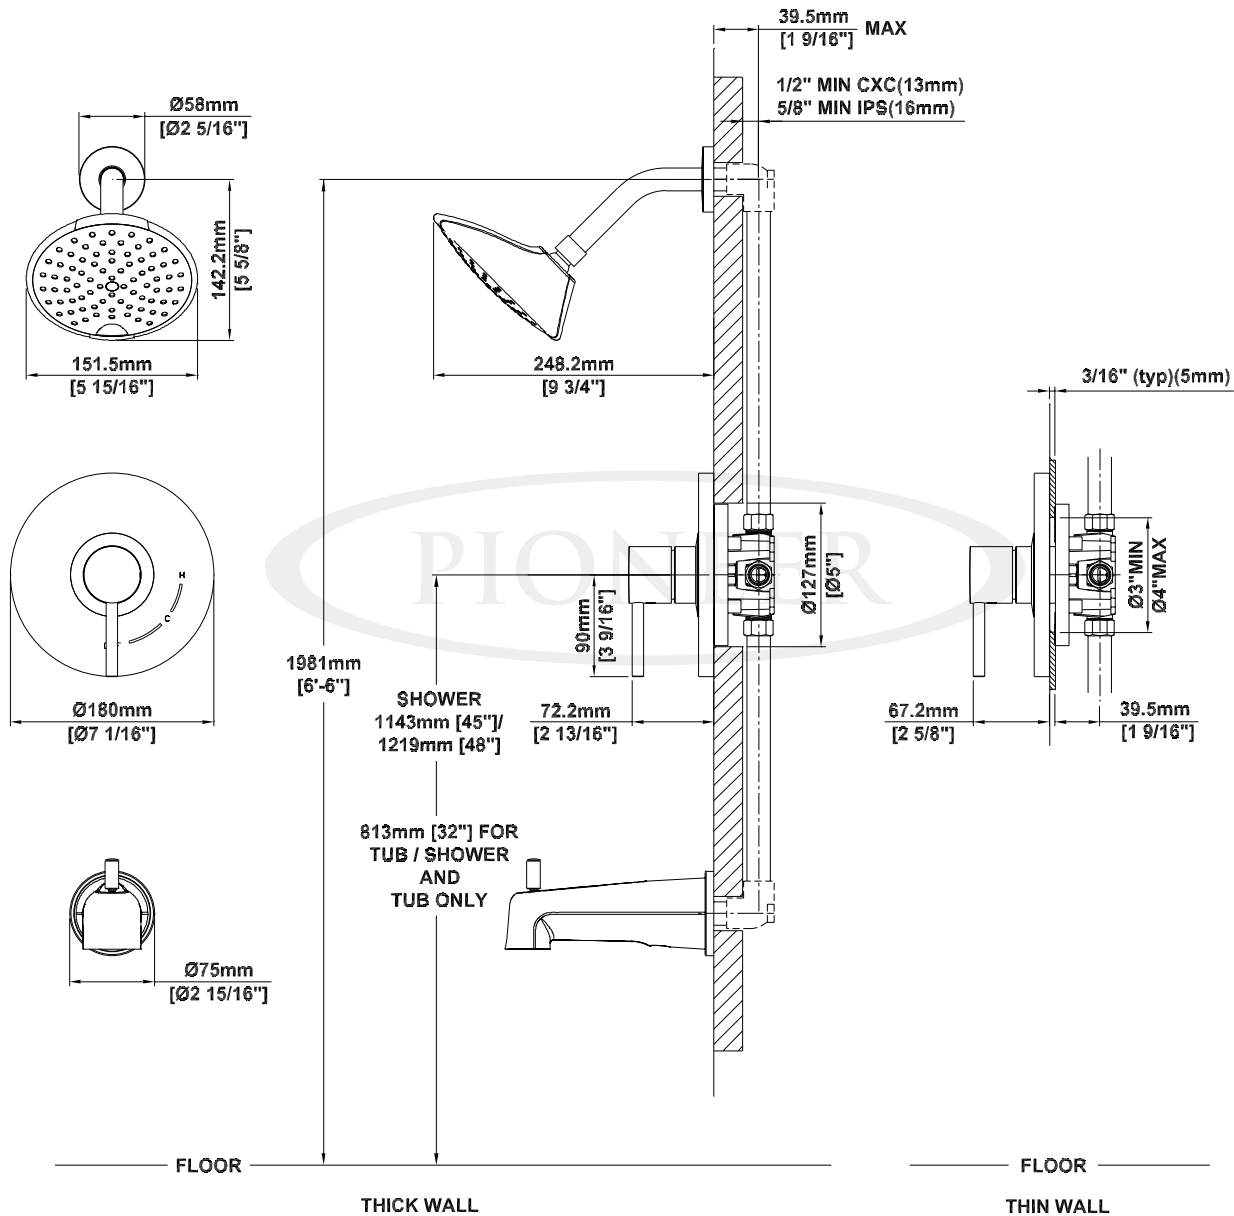

Product Diagram



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468

Commerce, CA 90040

www.pioneerind.com

Pioneer Industries, Inc. © 2012

DMSP4MT131T/REV. 02 2014

Page 2 of 2