

ENGINEERING EXCELLENCE

Motegi Series #3MT166-E0.5

SPECIFICATION SHEET

DESCRIPTION

- Single Handle Lavatory Faucet
- Metal Lever Handle
- Bent Nose Spout
- 5-5/8" Reach, 7-3/4" from Deck to Aerator
- Ceramic Disc Cartridge with Temperature Limit Stop
- 1-Hole Installation

STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- ANSI / NSF 61, SECTION 9
- CUPC / IAPMO LISTED / ADA **COMPLIANT**
- CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

FINISHES

- PC PVD Polished Chrome
- **PVD Brushed Nickel** BN
- SS PVD Stainless Steel
- PN **PVD Polished Nickel**
- PB **PVD Polished Brass**
- ORB Oil Rubbed Bronze

FLOW

Aerator Limited to 0.5 GPM



#3MT166-E0.5 SHOWN * ADA



Model #:	

Specific Features:

Project Name:

Submitted For:

Model	Description	Finishes	
#3MT166-E0.5	Single Handle Lavatory Faucet	□ PC	□ Other




ENGINEERING EXCELLENCE

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013 DMSP3MT166-E0.5/REV. 08 2013 Page 1 of 2

Installation Note:

Faucet Hole Size:- 1-1/4"

Maximum Deck Thickness:- 1-1/4"

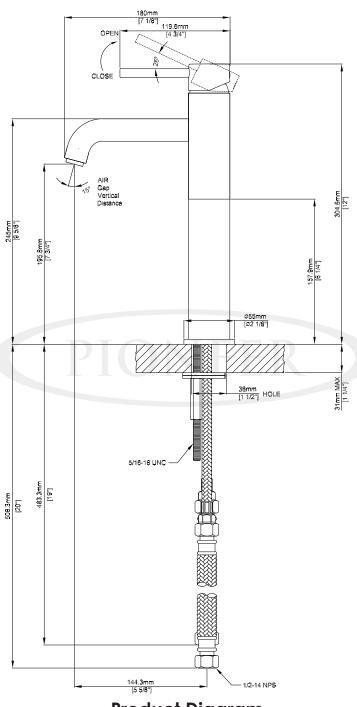

Product Diagram



DMSP3MT166-E0.5/REV. 08 2013 Page 2 of 2