



## ENGINEERING EXCELLENCE

### Motegi Series #4MT300T

### SPECIFICATION SHEET

#### DESCRIPTION

- Single Handle Shower Trim Set
- Metal Lever Handles
- Ceramic Disc Cartridge with Temperature Limit Stop
- Five Function 3" Diameter Showerhead
- Shower Arm and Flange
- Color Match Sleeve and Retaining Ring

#### FINISHES

- PC PVD Polished Chrome
- BN PVD Brushed Nickel
- PB PVD Polished Brass
- PN PVD Polished Nickel
- SS PVD Stainless Steel



#### STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- CUPC / IAPMO LISTED / ADA COMPLIANT

#### FLOW

- Showerhead Limited to 1.75 GPM Flow Rate

#4MT300T SHOWN \* ADA

Model #: \_\_\_\_\_

Specific Features: \_\_\_\_\_

Project Name: \_\_\_\_\_

Submitted For: \_\_\_\_\_



Model	Description	Finishes
#4MT300T	Single Handle Shower Trim Set	<input type="checkbox"/> PC <input type="checkbox"/> Other _____
Required Valve		
#4020B	Single Handle Tub And Shower Valve Set	
		<input type="checkbox"/> N/A




ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468  
Commerce, CA 90040  
www.pioneerind.com  
Pioneer Industries, Inc. © 2013

DMSP4MT300T/REV. 12 2012  
Page 1 of 2

## Installation Note:

Please refer to Installation Guide For this Product. Also Please refer to Installation Guide For the Rough-in Valve. Avoid Cross Flow Connections. Do not install a Shut off valve to any of the outlets. Install a 305 MM [12"] Straight Pipe with single elbow for bath between the rough-in valve and the tub spout.

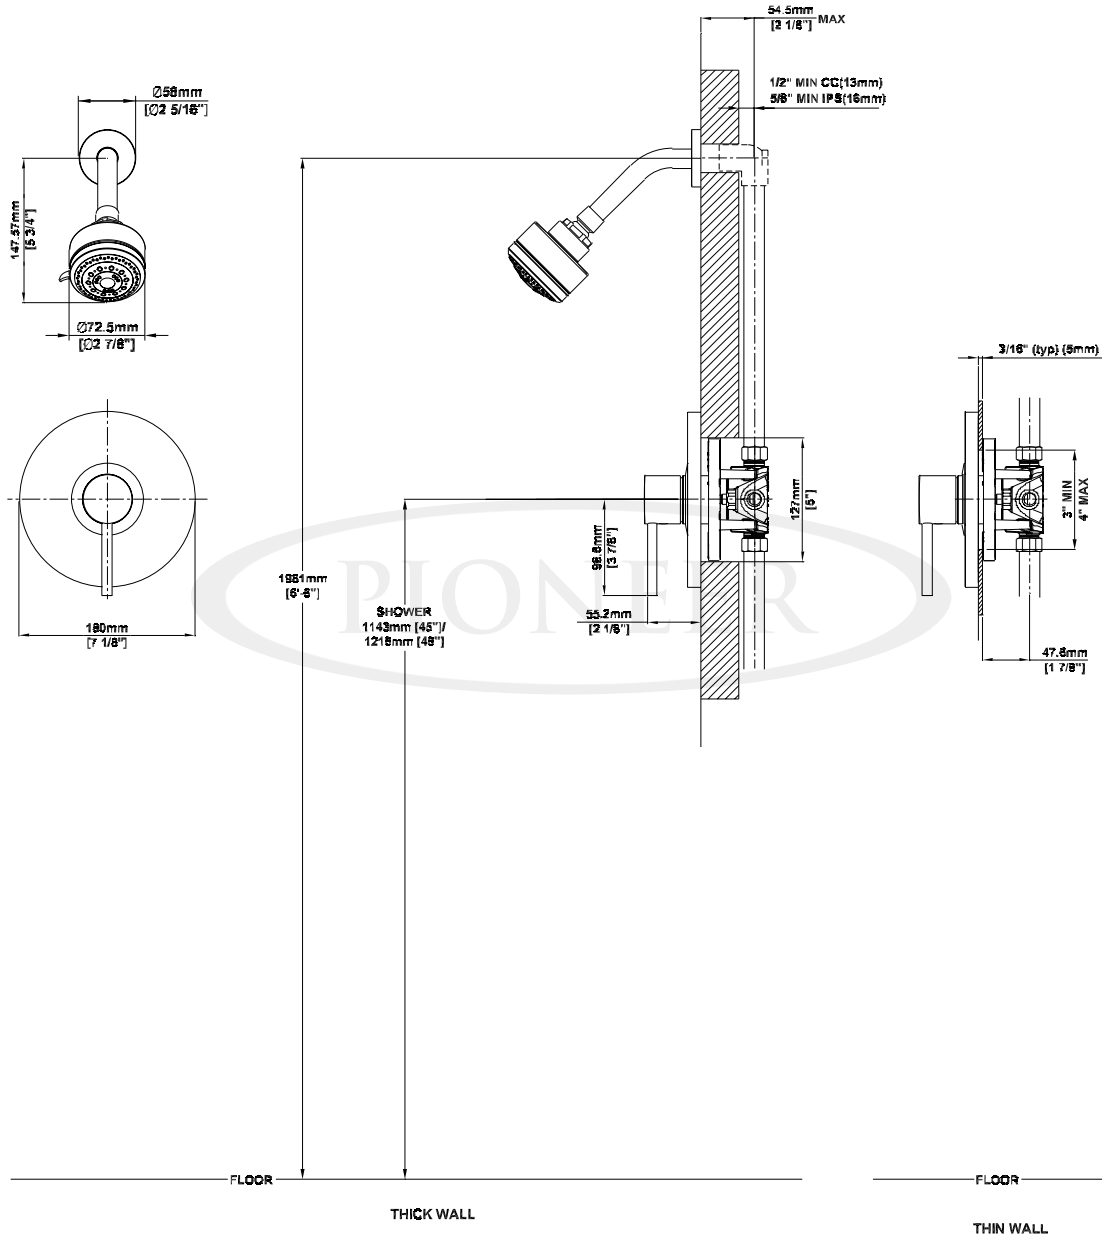

**Product Diagram**



ENGINEERING EXCELLENCE

Pioneer: 1-800-338-9468  
 Commerce, CA 90040  
 www.pioneerind.com  
 Pioneer Industries, Inc. © 2013

DMSP4MT300T/REV. 12 2012  
 Page 2 of 2