

ENGINEERING EXCELLENCE

Motegi Series #3MT180

SPECIFICATION SHEET

DESCRIPTION

- Single Handle Lavatory Faucet
- Metal Lever Handle
- Gooseneck Spout Swivel 90°
- 5-1/2" Reach, 8-1/2" from Deck to Aerator
- Ceramic Disc Cartridge with Temperature Limit Stop
- 1-Hole Installation
- Brass Pop-Up Drain Assembly
- 3/8" Compression SS Flex Connector Lines

FINISHES

- PC PVD Polished Chrome
- **PVD Brushed Nickel** BN
- SS **PVD Stainless Steel**
- PΝ **PVD Polished Nickel**
- РΒ **PVD Polished Brass**







STANDARDS APPLICABLE

- ASME A112.18.1
- ANSI A117.1
- ANSI / NSF 61, SECTION 9
- CUPC / IAPMO LISTED / ADA **COMPLIANT**
- CONTAINS NO MORE THAN 0.25% WEIGHTED AVERAGE LEAD CONTENT

FLOW

Aerator Limited to 1.5 GPM



Model #:	

Specific Features:

Project Name:

Submitted For:

Model	Description		Finishes	
#3MT180	Single Handle Lavatory Faucet	□ PC	□ Other	
#3MT181	Single Handle Lavatory Faucet-Less Pop-up	□ PC	☐ Other	
#3MT181G	Single Handle Lavatory Faucet-With Grid Drain Assembly	□ PC	□ Other	



DMSP3MT180/REV. 12 2012 Page 1 of 2


ENGINEERING EXCELLENCE

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com Pioneer Industries, Inc. © 2013

Installation Note:

Faucet Hole Size:- 1-1/4"

Maximum Deck Thickness:- 1-1/4"

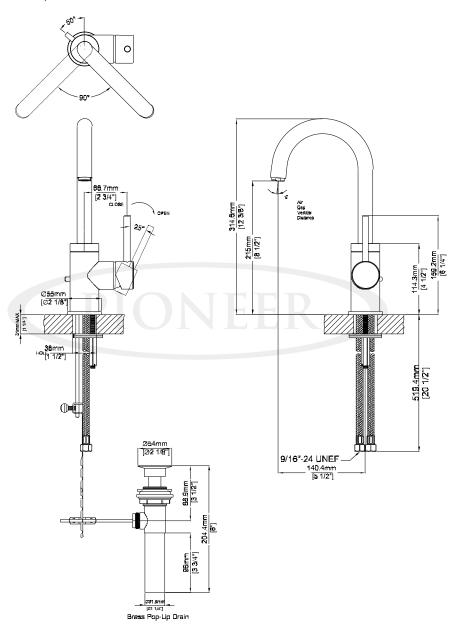

Product Diagram



Page 2 of 2

DMSP3MT180/REV. 12 2012

ENGINEERING EXCELLENCE

Pioneer:1-800-338-9468 Commerce, CA 90040 www.pioneerind.com

Pioneer Industries, Inc. © 2013