


Flanged 5 Valves Manifold - “H” Type

Mod. 522

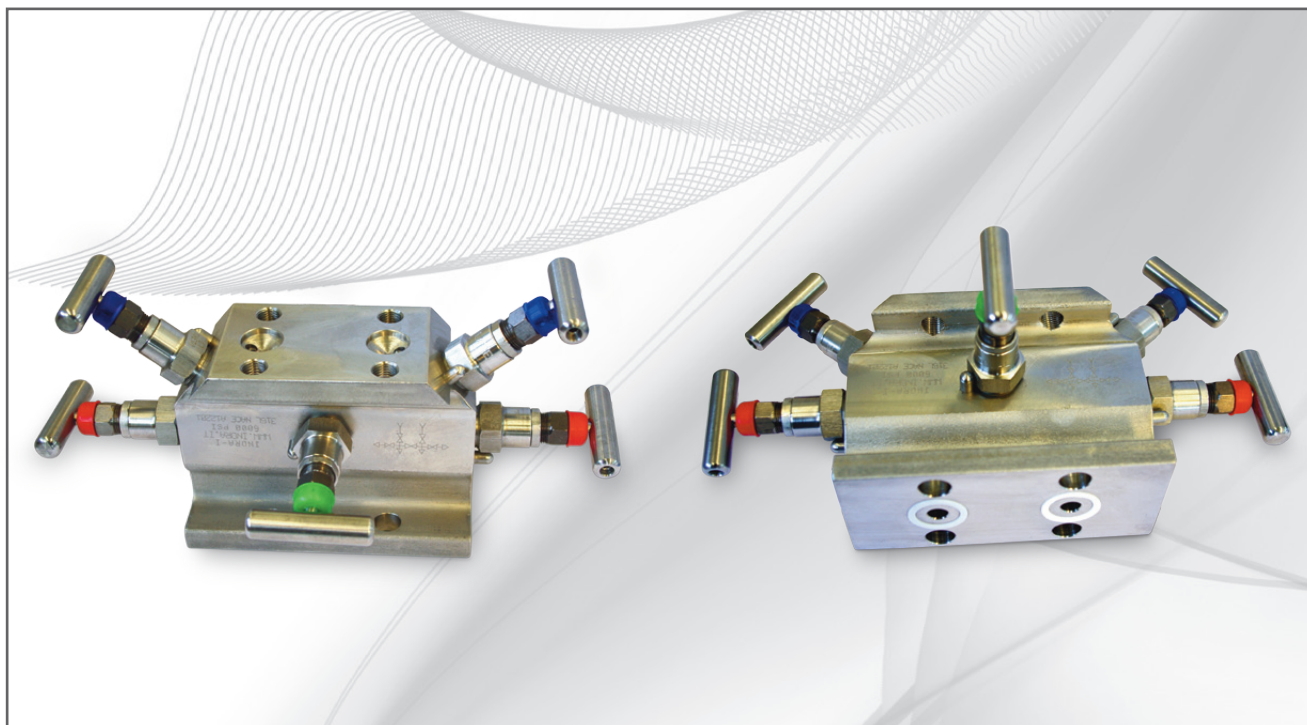

Applications:

- Isolation of differential pressure, level, flow transmitters
- Instrument direct mounting

Connections:

- Flanged instrument/process “H” type Vent 1/4” NPT-F

Rating:

- Standard: 6,000 PSI (420 bar)
- Optional: 10,000 PSI (700 bar)

Seals:

- Standard: PTFE ($T \leq 200^{\circ} \text{C}$)
- Optional: Graphite ($T > 200^{\circ} \text{C}$)

Features:


- Non rotating trim
- Bonnet locking pin
- Dust cup
- Easy operation

Ordering Information

Direct Model		Connections OUT		Seal Material	
522	IN Centers: CL = 54 mm	F	Flanged CL = 54 mm	T	PTFE
				G	Graphite

522	-	F	F	B	-	L	-	T	-	*	*	*
-----	---	---	---	---	---	---	---	---	---	---	---	---

Connections IN		Vent		Materials		Options See Table	
F	Flanged CL = 54 mm	B	1/4" NPT-F	L	S.S. 316L		
				DL	S.S. 316 / 316L (Dual grade)		
				N	S.S. 316 Nace		
				C	C.S. A 105		
				LF2	C.S. A 350 LF2		
				D	Duplex F51		
				SD	Super-duplex		
				M	Monel 400		
				X	On demand		

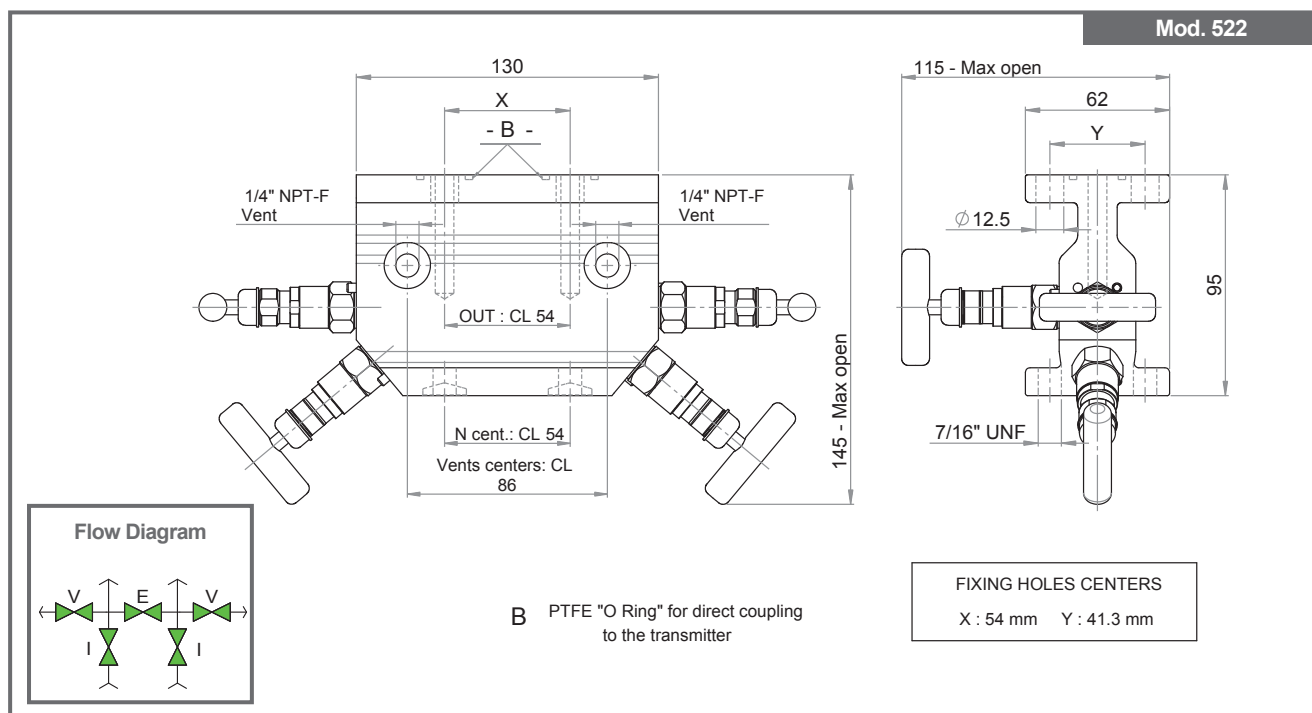

Options

-H	-L	-P						Availability			
								Needle Valves	Manifolds	Monoflanges	Ball Valves
A	Antitamper Actuator							✓	✓	✓	✓
B	Bolted Bonnet							✓		✓	✓
F	Oval Flange								✓		
G	Graphite seals							✓	✓	✓	✓
H	Rating 10.000 PSI (²)							✓	✓		
K1	Mechanical Electrical Contact										✓
K2	Magnetic Electrical Contact										✓
KG	Graphite bonnet seals replacement kit							✓	✓	✓	✓
KT	PTFE bonnet seals replacement kit							✓	✓	✓	✓
L	Locking Device							✓		✓	✓
O	Oxygen Service							✓	✓	✓	✓
P	Padlock							✓		✓	✓
Q	Quick Locking Device							✓	✓	✓	✓
R	Swivelling Fitting							✓		✓	✓
Y	Bonnet O.S.&Y.							✓		✓	✓
TV	Painting Treatment							✓	✓	✓	✓
TF	Phosphatization Treatment (¹)							✓	✓	✓	✓
TZ	Zinc Plating Treatment (¹)							✓	✓	✓	✓
U45-V	7/16" UNF L=45 mm screws and nuts kit (2 screws - 2 nuts) for 2 valves manifold								✓		
U75-2V	7/16" UNF L=75 mm screws and nuts kit (2 screws - 2 nuts) for 2 valves manifold								✓		
U45-3/5V	7/16" UNF L=45 mm screws and nuts kit (4 screws - 4 nuts) for 3 and 5 valves manifold								✓		
U75-3/5V	7/16" UNF L=75 mm screws and nuts kit (4 screws - 4 nuts) for 3 and 5 valves manifold								✓		
W	2" Pipe bracket								✓		
AT	Atex Version							✓	✓	✓	✓
GR	Gost R Version							✓	✓	✓	✓
FS	Fire Safe Version							✓	✓	✓	✓
TA	Fugitive Emission TA-LUFT Version							✓	✓	✓	✓
CRN	CURRENT CRN COMPLIANCE FOR 10 CANADIAN PROVINCES							✓	✓	✓	✓

(1) For carbon steel versions only.

(2) For flanged, BW, SW versions operating limits as for reference rules.

X = NOT CODED OPTION

For DB, SBB, DBB valves, repeat option code as many times as requested.
If you don't find options you need, please feel free to contact our sales Department
Ex: mod. 739R-DD-S-T-A-A-A = 2 Block + 1 Bleed bonnet Anti-tamper

Options

-H	-L	-P						Availability			
								Needle Valves	Manifolds	Monoflanges	Ball Valves
IDX	Vent Bottom Right								✓		
ISX	Vent Bottom Left								✓	✓	✓
M	Monel Trim							✓	✓	✓	✓
SPC 1	Special Marking - See descriptor							✓	✓	✓	✓
DIN 7756	Inlet Special Insert 1/8" NPT-M x DIN 7756 VG 8							✓	✓	✓	✓
2.0515 /DN15	Special DN15 marking requirement							✓	✓	✓	✓
3-G-GR -CUTR	GOST & CU-TR Certificate							✓	✓	✓	✓
X	Not Coded Option							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓
?	?							✓	✓	✓	✓

(1) For carbon steel versions only.

(2) For flanged, BW, SW versions operating limits as for reference rules.

For DB, SBB, DBB valves, repeat option code as many times as requested.
 If you don't find options you need, please feel free to contact our sales Department
 Ex: mod. 739R-DD-S-T-A-A-A = 2 Block + 1 Bleed bonnet Anti-tamper

Available Bonnet Styles


S.S. Dust Cap Bonnet



Original Bonnet



Bolted Bonnet



Anti-Tamper Bonnet



O.S.&Y. Bonnet
with locking device



O.S.&Y. Bonnet



O.S.&Y. Bonnet



Standard Bonnet with
locking device

