

1. Строим сеть

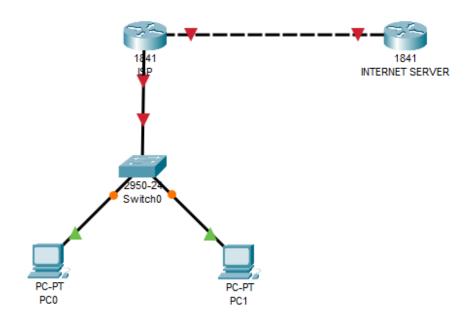

2. Настраиваем сеть

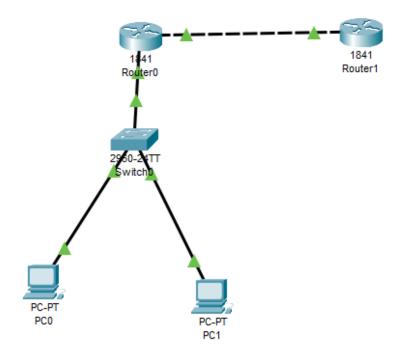

3. Настройка роутера

```
Router(config-if) #exit
Router(config) #ip route 0.0.0.0 0.0.0.0 100.10.10.2
Router(config) #int fa0/0
Router(config-if) #ip nat inside
Router(config-if) #int fa0/1
Router(config-if) #ip nat outside
Router(config-if) #exit
Router(config) #ip nat inside source static 192.168.0.1 100.10.11.1
Router(config) #ip nat inside source static 192.168.0.1 100.10.11.2
Router(config) #
```

4. Пинг

```
Pinging 100.10.10.2 with 32 bytes of data:

Request timed out.

Request timed out.

Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Reply from 100.10.10.2: bytes=32 time<1ms TTL=254

Ping statistics for 100.10.10.2:

Packets: Sent = 4, Received = 2, Lost = 2 (50% loss),

Approximate round trip times in milli-seconds:

Minimum = 0ms, Maximum = 0ms, Average = 0ms
```