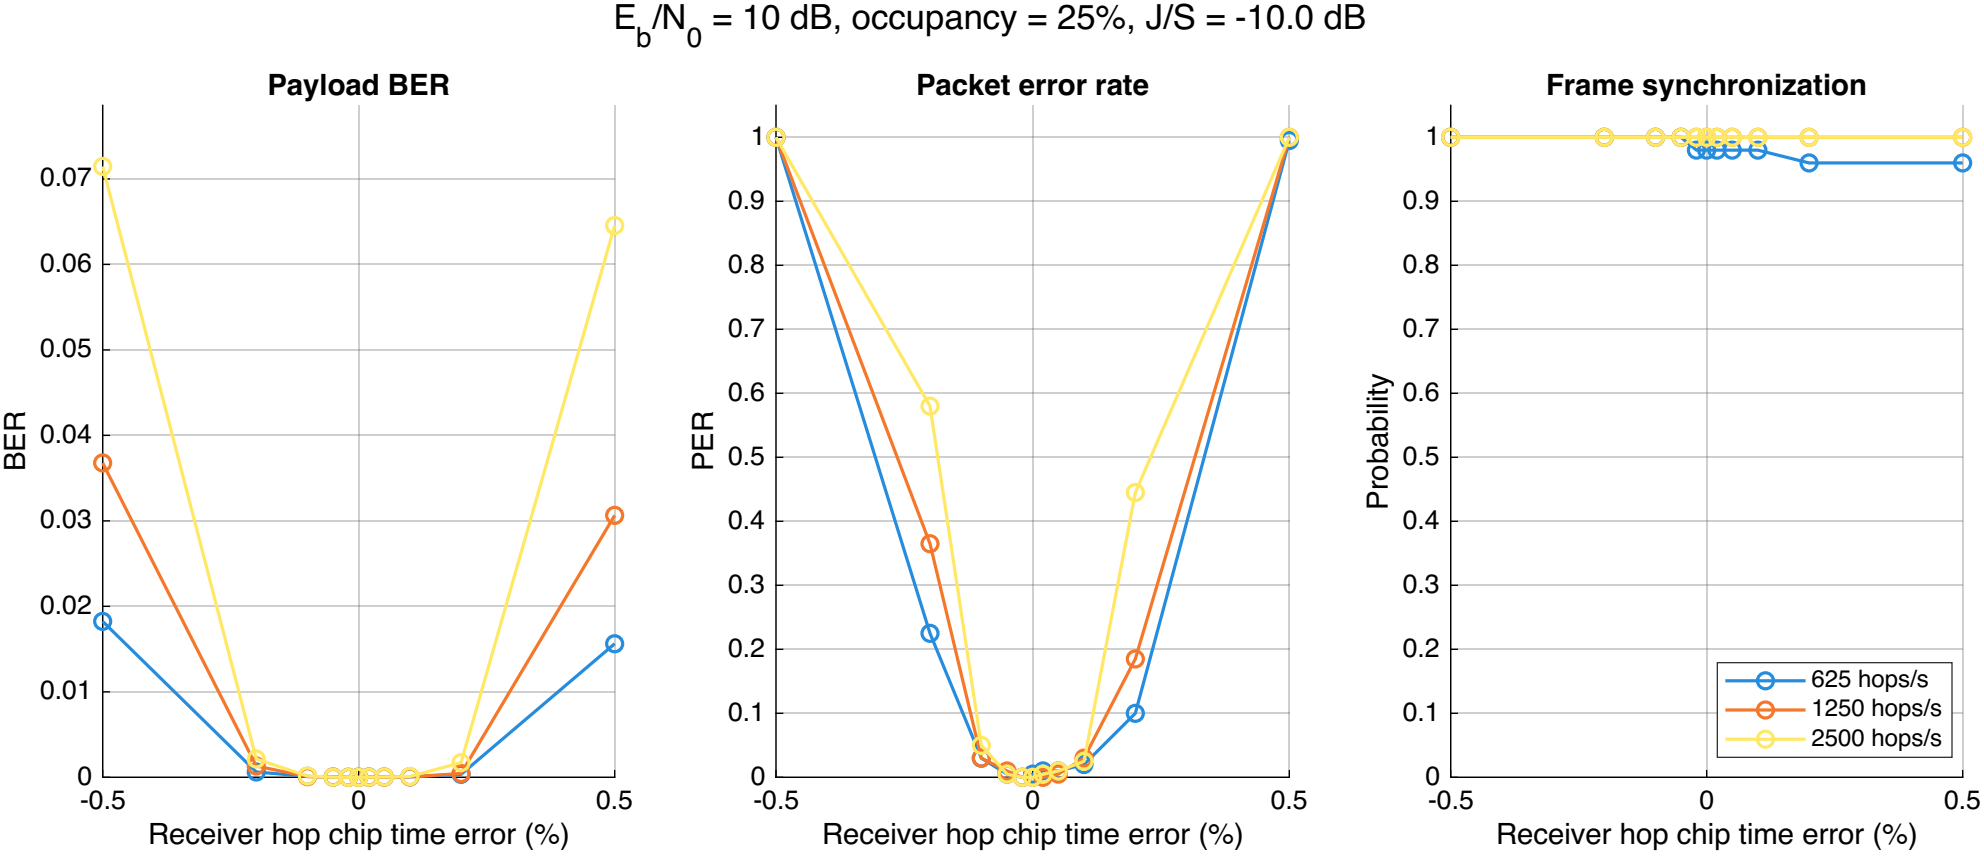
E_b/N_0 = 10 dB, occupancy = 25%, J/S = -10.0 dB
Payload BER
BER
Receiver hop chip time error (%)
Packet error rate
PER
Receiver hop chip time error (%)
Frame synchronization
Probability
Receiver hop chip time error (%)
625 hops/s
1250 hops/s
2500 hops/s