




ACD Digital Monitoring

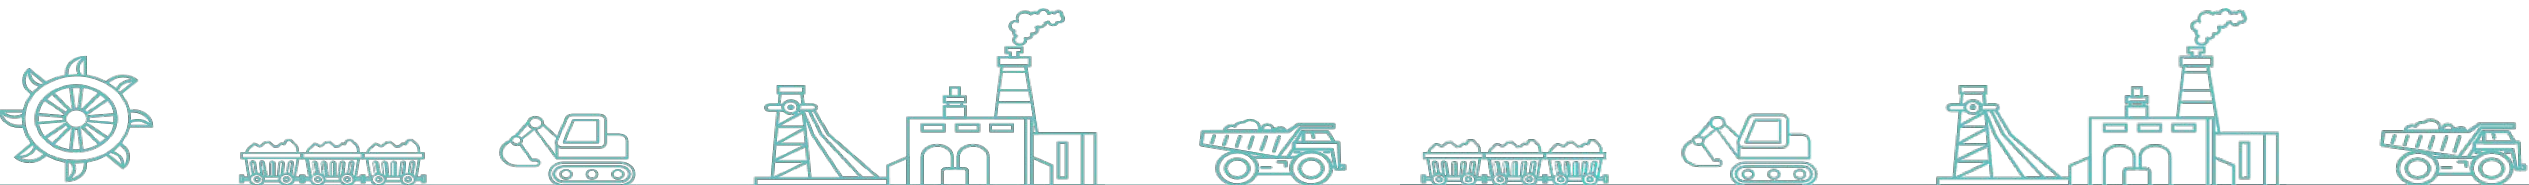

OIL & GAS | ZINC, SILVER & LEAD | ALUMINUM | IRON ORE & STEEL | COPPER | NICKEL | GLASS
| CONNECTIVITY & NETWORK SOLUTION | SOFTWARE | POWER

Manual Measurement



“This image shows the manual measurement of each anode in a single pot. As illustrated, we have installed a specialized device on the anode to capture continuous, real-time ACD (Anode-Cathode Distance) data, enabling precise monitoring and improved process control.”

Pot Structure



This image shows one side of a pot, which contains 20 anodes, with another 20 anodes on the opposite side, making a total of 40 anodes per pot. Anode changes occur in a 28-day cycle. Therefore, any installed structure or device must be designed to withstand this operational process and remain unaffected during anode replacement activities.

Anode Change



“This image shows the PTM (Pot Tending Machine), which performs anode changes once the anodes have completed their full life cycle. The replacement process occurs vertically, as the PTM lifts all 40 anodes simultaneously and replaces them in one operation. Therefore, any installed device or structure must be designed to withstand this vertical lifting process and remain unaffected during anode change.”