Line balance summary — Gearbox subassembly

Method: Optimal (CP-SAT) (proven optimal)

STATIONS	THEORETICAL MIN	CYCLE TIME	TAKT TIME
8	**7**	**70 s**	**70 s**

LINE EFFICIENCY	BALANCE DELAY	SMOOTHNESS INDEX	TOTAL IDLE / CYCLE
87.3%	**12.7%**	**29.44**	**71 s**

Yamazumi — stacked task times per station

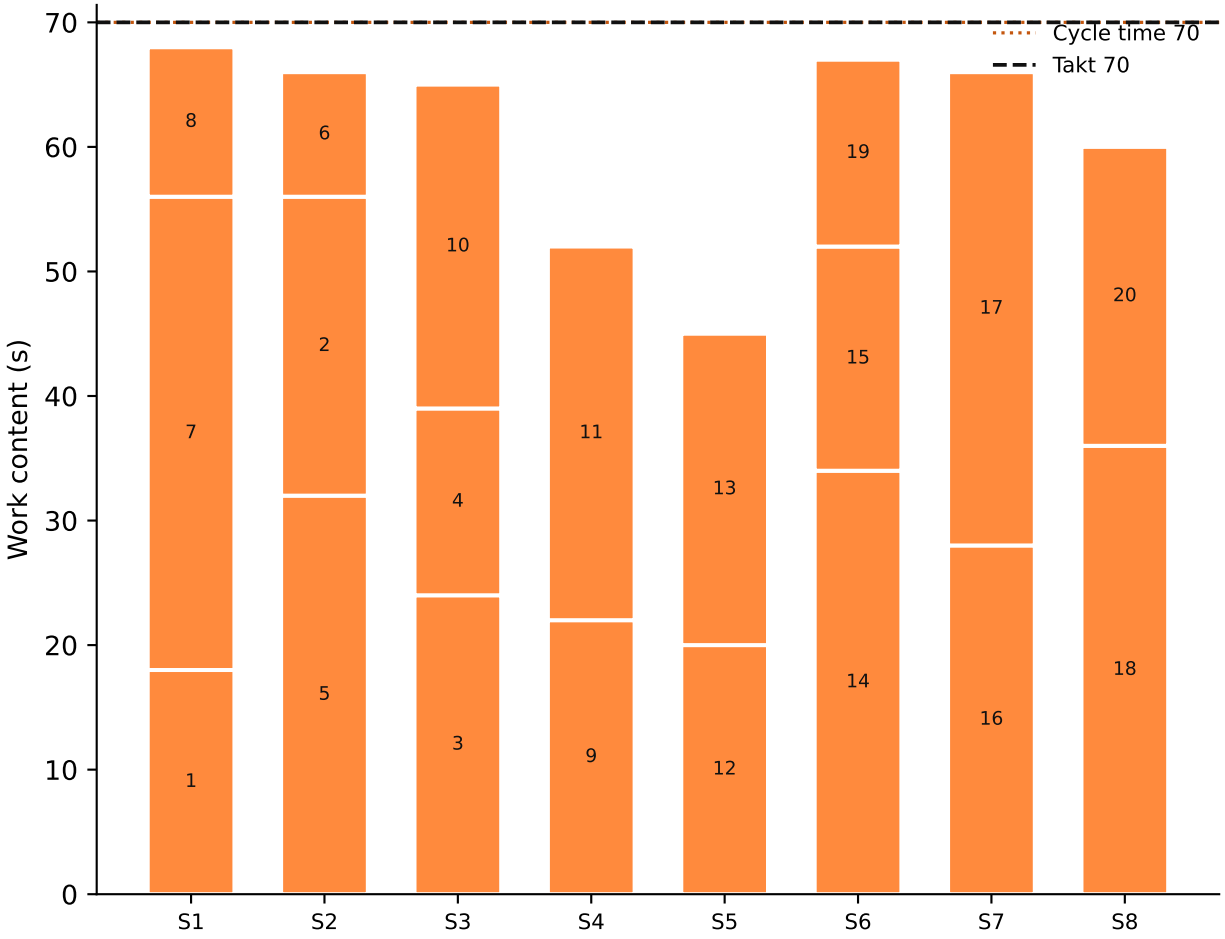

Stn	Tasks	Load	Idle
S1	1, 7, 8	68	2
S2	5, 2, 6	66	4
S3	3, 4, 10	65	5
S4	9, 11	52	18
S5	12, 13	45	25
S6	14, 15, 19	67	3
S7	16, 17	66	4
S8	18, 20	60	10