


Process Automation

Angle Seat Valve

Angle Seat Valve is a 2-Way Pneumatic piston valves used to control the flowing of liquids, it creates a smooth flow path ensures maximum volume with minimal pressure loss.

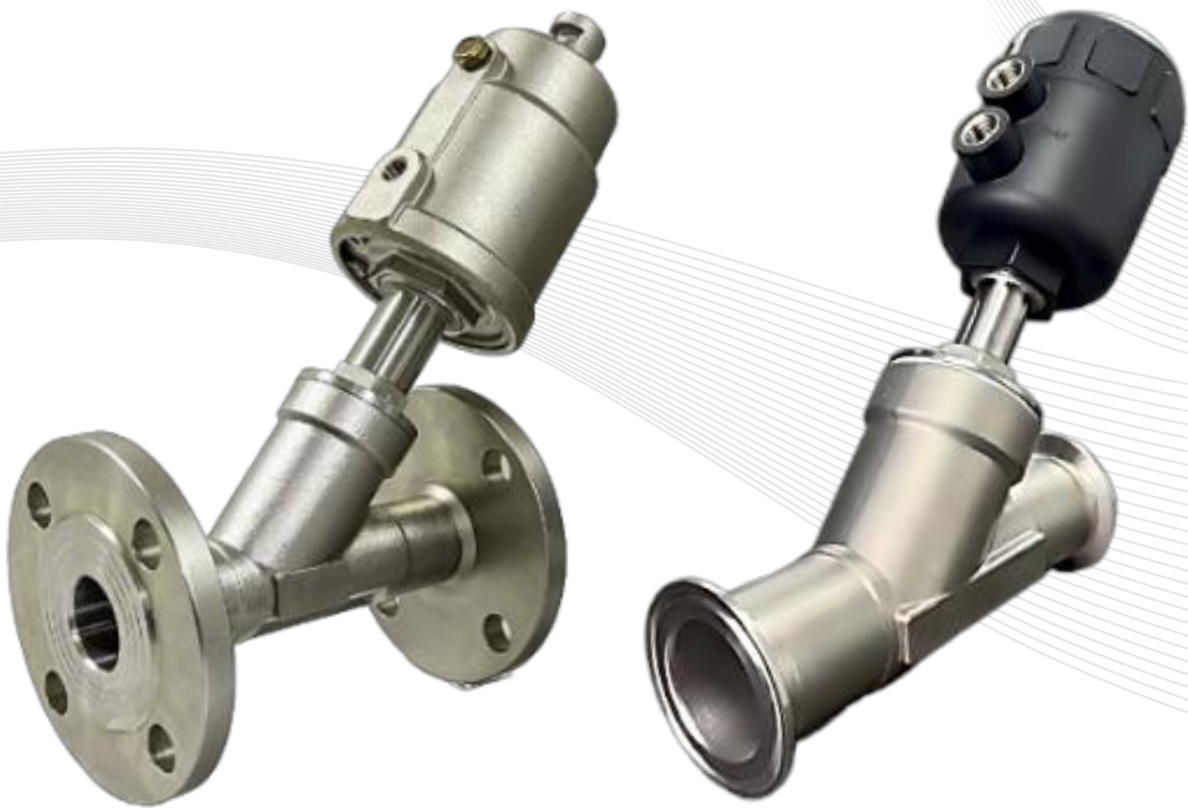

Features

- **Durable and Low Maintenance**
Durable CF8/CF8M construction ensures high strength and required relatively low maintenance.
- **Variable Fitting Connections**
Different fitting types options enable to adapt multiple industrial applications.
- **Visual Position Indicator**
Top Transparent indicator provides instant visual status of valve position.
- **High Flow Efficiency and Low Pressure Loss**
Direct pilot attachment simplifies automation while reducing costs and maintenance.
- **Seals and Gaskets**
Resilient seals, gaskets and seats handle extreme temperatures and harsh media.
- **Fast Actuation**
Pneumatically actuated offer rapid opening & closing times, makes them ideal for high-speed automation systems.



Technical Specification

Product Range	:	Threaded Type, Flange Type & Tri-Clamp End Type
Type	:	2/2 Normally Closed
Port Sizes	:	G1/2", G3/4", G1", G1-1/4", G1-1/2", G2", G2-1/2", G3" & G4"
External Pilot Port Sizes	:	G1/8", G1/4"
Actuator Size (mm)	:	50 – 100
Operating Pressure (bar)	:	0 – 16
External Pilot Pressure (bar)	:	3 – 7
Flow Factor (m ³ /hr)	:	4 – 218
Ambient Temperature	:	-10°C to +70°C (NBR) & -10°C to +150°C (FKM)
Medium Temperature	:	-10°C to +180°C
Operating Medium	:	Air, Water, Hot Water, Steam & Inert Gases
Seal Material	:	PTFE, NBR & FKM (VITON)
Material of Construction	:	Housing : CF8, CF8M Actuator : CF8, CF8M & Plastic

Product Ordering No

ASV	1	1			1	1	63		1				
Type		Body Material	Actuator Material	Seal	Actuator	DN		Port Size		Connection			
1	2/2 NO	1	CF8	CF8	PTFE + NBR	1	50	1	15	63	G1/2"	1	Threaded
2	2/2 NC	2	CF8	Plastic	PTFE + NBR	2	63	2	20	64	G3/4"	2	Flanged
		3	CF8M	CF8M	PTFE + NBR	3	80	3	25	65	G1"	3	TC-End
		4	CF8	CF8	PTFE + FKM	4	100	4	32	66	G1 1/4"		
		5	CF8	Plastic	PTFE + FKM			5	40	67	G1 1/2"		
		6	CF8M	CF8M	PTFE + FKM			6	50	68	G2"		
		7	CF8M	Plastic	PTFE + NBR			7	65	69	G2 1/2"		
		8	CF8M	Plastic	PTFE + FKM			8	80	70	G3"		
								9	100	71	G4"		

