

Part G

Waste management and minimisation

Blacktown
City Council

Table of contents

Table of contents **2**
1. Introduction **5**
1.1 Aims of this Part 5
1.2 Objectives of this Part 5
1.3 Relationship to other documents 5
1.4 When does this Part apply? 5
1.5 How to read this Part 6
1.6 Definitions 6
2. Waste management plan **9**
2.1 Generation rates 9
2.1.1 Residential 9
2.1.2 Commercial and retail 9
2.1.3 Industrial 10
2.2 Waste systems and technologies 10
2.3 Constrained sites 10
3. Subdivision and engineering works **11**
3.1 Objectives 11
3.2 Development controls 11
3.2.1 Preparing a waste management plan 11
3.2.2 Preparing scaled site and floor plans 12
3.3 Additional considerations 16
3.3.1 Laneway developments 16
3.3.2 Developments with internal loop roads and private roads 16
3.3.3 Battle axe blocks 17
4. Demolition and construction **18**
4.1 Objective 18
4.2 Development controls 18
4.2.1 Preparing a waste management plan 18
4.2.2 Preparing scaled site and floor plans 19
5. Other development types **20**
5.1 Objective 20
5.2 Development controls 20
5.2.1 Preparing a waste management plan 20
5.2.2 Internal waste and recycling storage 20
5.3 Development controls – specific requirements 20
5.3.1 Daily bin storage 20
(a) Individual residential bins 20

(b) Communal residential bins 21
(c) Non-residential development 22
(d) Additional considerations for mixed use developments 23
5.3.2 Bulky waste 24
(a) Individual residential bins 24
(b) Individual residential bins – developments serviced by private roads 24
(c) Communal residential bins 24
(d) Communal residential bins – multi dwelling housing 26
(e) Non-residential development 26
5.3.3 Chutes 26
5.3.4 Bin travel distances 27
(a) Bin movement aids (other than industrial developments) 27
5.3.5 Bin travel paths 28
(a) Individual residential bins 28
(b) Communal residential bins 28
(c) Non-residential development 28
5.3.6 Bin transfer grades 28
5.3.7 Collection points 29
(a) Individual residential bins 29
(b) Multi-dwelling housing developments 29
(c) Residential communal bins 30
(d) Boarding houses 31
(e) Isolated sites 32
(f) Mixed use 32
(g) Commercial 33
(h) Centre-based child care facility 33
(i) Industrial 34
5.3.8 Onsite truck access 34
5.3.9 Loading bays 35
5.3.10 Loading dock management plan 36
5.3.11 Plan of management 37
(a) Boarding house developments 37
6. Appendix 1 – Matrix 38

Table of photos

Photo 1: Dead end road network that does not support truck movement 14
Photo 2: Cars parked in dead end road networks..... 14
Photo 3: Cars parked in dead end road networks and obstructing waste collection..... 15
Photo 4: Excessive bins presented within the cul-de-sac 15
Photo 5: Waste collection vehicle unable to extend to collect bins within the cul-de-sac 16
Photo 6: Sign posted and caged bulky waste room..... 25
Photo 7: Caged bulky waste room located within the main waste room 25
Photo 8: Excessive bins presented at the kerbside 30
Photo 9: Key lock box outside entry point..... 35
Photo 10: Waste rooms opening onto line marked and treated loading bay 36

Table of figures

Figure 1: Spacing requirements for bins presented at the kerbside..... 13
Figure 2: Waste chute room with wheelchair access and rotation space..... 27

1. Introduction

This part of the *Blacktown Development Control Plan 2015* (DCP 2015) sets out the requirements for waste management and minimisation for new developments and should be read in conjunction with the *Blacktown City guideline for waste management in new developments*.

Both documents will be used to assess any development application.

Note, reference to truck access in this document relates to waste collection vehicles only. General use loading bays, including those proposing to co-locate with waste servicing loading bays, must comply with requirements from Council's Access and Transport Management section.

1.1 Aims of this Part

a. Ensure all new developments consider the design of disposal and management of waste generated onsite throughout all stages of the development.

b. Increase opportunities for reuse and recycling of building, household, industrial and commercial waste.

c. Establish the framework for the delivery of Australian and NSW Government waste reduction targets.

d. Provide waste management objectives and performance standards to assist in designing developments with suitable waste management systems for ongoing use.

e. Help reduce the overall negative environmental effects of waste.

1.2 Objectives of this Part

a. Decrease the amount of waste being sent to landfill and maximise opportunities for reuse and recycling.

b. Improve separation of waste types at the source.

c. Provide design standards that will assist waste collections.

d. Maintain the amenity and character of the neighbourhood.

e. Support the circular economy by considering the whole life impact of the development.

f. Guide the preparation of waste management plans.

1.3 Relationship to other documents

This part has been prepared to meet the objectives of the *Waste Avoidance and Resource Recovery Act 2001*. It supplements the provisions contained within the Blacktown Local Environment Plan 2015 and should be read with all relevant Parts of the Blacktown DCP 2015 and any other relevant Blacktown City Council policy, standard or guideline.

1.4 When does this Part apply?

This part applies to all development and to any activity that requires development consent under the provisions of the *Environmental Planning and Assessment Act 1979*.

1.5 How to read this Part

For developments identified in Part 5 Other development types, refer to the matrix at **Appendix 1**. You will need to identify your development type and address as part of your submission to Council, the requirements identified with a tick.

1.6 Definitions

Attached dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Boarding house	As defined by *Blacktown Local Environmental Plan 2015*
Build to rent housing	As defined by the *State Environmental Planning Policy (Housing) 2021*
Bulky waste	Large bulky items like lounges, fridges, furniture, mattresses, pallets or whitegoods.
Bulky waste storage	An area designed to store any unwanted bulky waste items from residential, retail, commercial or industrial developments.
Centre-based child care facility	As defined by *Blacktown Local Environmental Plan 2015*
Chute	Ventilated, vertical and inclined pipes or ducts passing through a multi-storey building with access on each floor. Chutes discharge into bins at the lowest point in the waste room.
Class 10 structure	As defined by the *National Construction Code*
Clinical waste	Waste generated from medical, nursing, dental, veterinary, pharmaceutical or similar operations that requires collection by authorised waste contractors.
Co-living housing	As defined by *Blacktown Local Environmental Plan 2015*
Collection point	The permitted area on a footpath, roadway or private property (where applicable) that waste, recyclables and bulky waste are loaded into collection vehicles.
Commercial premise	As defined by *Blacktown Local Environmental Plan 2015*
Commercial tenancy	A tenant of a premises used as a business, office or retail outlet.
Commercial waste	Any solid waste generated by commercially rated properties. This excludes liquid, clinical, or demolition and construction waste.
Communal waste room	This is a waste room that is shared by residents in a residential development, or staff in a retail, commercial and/or industrial development.
Compactor	A machine for compressing waste into bins.
Daily bin storage area	Dedicated area where bins are located within the property or tenancy.
Demolition and construction waste	Materials excavated from or on the site, such as: • rock and soil • waste asphalt, bricks, concrete, plasterboard, timber and vegetation

	• asbestos containing material, hazardous materials and contaminated soil.
Detached studio	As defined by the *State Environmental Planning Policy (Exempt and Complying Development Codes) 2008*
Domestic recycling service	The service to collect recyclable material from households.
Domestic waste	Waste generated by households.
Dual occupancy	As defined by *Blacktown Local Environmental Plan 2015*
Dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Dwelling house (single unit)	As defined by *Blacktown Local Environmental Plan 2015*
Educational establishment	As defined by *Blacktown Local Environmental Plan 2015*
Experienced waste consultant	A waste consultant with a minimum 5 years industry experience.
Garbage	Waste material other than trade or special waste, liquid waste or recyclable materials.
Group home	As defined by the *State Environmental Planning Policy (Housing) 2021*
Hotel or motel accommodation	As defined by *Blacktown Local Environmental Plan 2015*
Internal lots	Lots or dwellings that do not front a public road including lots serviced via an access handle in a battle-axe development.
Internal loop road	A road which allows waste collection vehicles to enter and exit the site in a forward direction with a maximum of 3 reverse movements. This may include straight through roads or private roads with a cul-de-sac head.
Internal waste and recycling storage	This is a cupboard, drawer or other suitable area located within each dwelling or lot for the storage of 1 days' waste and recyclables.
Interim waste room	These are waste rooms adjacent to lifts in the basement or other locations where bins are stored until they need to be moved to the main waste room.
Intractable waste	Waste that is hard to control or deal with. This includes waste that is: • flammable • infectious • corrosive.
Isolated sites	Sites which have been physically built out and can't comply with the frontage requirements for redevelopment because the adjoining sites have already been developed.
Kerbside collection point	The designated waste collection point at the edge of a formed road.

Mixed use development	As defined by *Blacktown Local Environmental Plan 2015*
Mobile garbage bin	A bin up to 1,100 litres capacity with wheels that allow it to be moved around.
Multi-dwelling housing	As defined by *Blacktown Local Environmental Plan 2015*
Ongoing waste management	Management of waste generated onsite during occupancy.
Recyclable	Capable of being reprocessed into useable material.
Reuse	Capable of being used again without being processed.
Residential flat building	As defined by *Blacktown Local Environmental Plan 2015*
Residual waste	Material that cannot be recycled.
Retail premise	As defined by *Blacktown Local Environmental Plan 2015*
Secondary dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Semi-detached dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Seniors housing	As defined by *Blacktown Local Environmental Plan 2015*
Serviced apartments	As defined by *Blacktown Local Environmental Plan 2015*
Shop top housing	As defined by *Blacktown Local Environmental Plan 2015*
Site waste bins	Robust containers provided for surplus and unwanted materials onsite during construction activity.
Special waste	Clinical, intractable or hazardous waste, chemicals and other products that require special care and disposal at a specialist facility.
Truck turntable	A circular motorised platform within the ground that rotates a truck whilst parked.
Undercroft	A space under a building on columns without walls.
Waste avoidance	Action to reduce the amount of waste generated by households, commerce, industry and all levels of government.
Waste	As defined under the *Protection of the Environment Operations Act 1997*
Waste chute room	A room located on each floor of a building that houses the access point to a waste chute and a mobile recycling bin.
Waste management plan	A document that provides details on the expected volumes and types of waste to be generated onsite and how it will be stored and managed.
Waste room	A room that is located adjacent to or adjoining a loading bay where garbage and recycling bins for the site are stored awaiting reuse or collection.

2. Waste management plan

A waste management plan that addresses the relevant provisions of this Part and *Blacktown City guideline for waste management in new developments* must be submitted with every development application to which this part applies. A template is provided in the *Blacktown City guideline for waste management in new developments*.

The waste management plan needs to outline how you will avoid creating waste, and increase reuse and recycling of materials onsite during:

- demolition
- construction
- occupancy.

An experienced waste consultant must prepare the waste management plan if the:

- development is 3 storeys or more with a lift, or exceeds 20 units/dwellings
- development includes commercial, retail and/or industrial development with a floor area of 2,500 square metres or more.

The waste management plan will need to provide detail on the:

- expected volumes and types of waste being generated during demolition and construction
- storage and treatment of waste and recyclables onsite
- disposal methods for waste and recyclables during construction
- waste and recycling collection system for ongoing use of the site.

It must be supported by scaled waste management drawings to demonstrate compliance with the relevant provisions of this Part.

For developments generating hazardous, intractable or clinical waste, the waste management plan must confirm compliance with NSW Government regulations and licences for activities generating these types of waste.

2.1 Generation rates

2.1.1 Residential

Refer to the *Blacktown City guideline for waste management in new developments* for residential waste and recycling generation rates.

2.1.2 Commercial and retail

Refer to the EPA *Better Practice Guide for Resource Recovery in Residential Developments 2019*. This document contains updated waste and recycling generation rates for these uses. If the retail or commercial tenancies are not known at the development application stage, the rates for the largest waste and recycling generator permitted in the zoning of the proposed development, must be applied.

2.1.3 Industrial

Refer to the *Blacktown City guideline for waste management in new developments* for waste and recycling generation rates.

2.2 Waste systems and technologies

Where appropriate and suitably demonstrated, Council may consider alternative waste systems, processes and technologies. This may include composting, digesters, bin lifts, dedicated problem waste collection points and more. At a minimum, suitability must demonstrate that the proposal benefits the residents and supports best practice for caretakers and operational staff.

2.3 Constrained sites

Smaller and isolated sites may be problematic for waste collection, particularly for when they are unable to consolidate with surrounding lots. These sites may require an alternative onsite service arrangement with a small rigid waste collection vehicle (as defined by Australian Standard 2890.2).

Council may use the below criteria to determine if an alternative arrangement is permitted. This may include but is not limited to sites that:

- cannot accommodate a safe and/or efficient kerbside collection
- have insufficient and/or unsuitable frontage for kerbside collection
- have access off cul-de-sac heads with limited frontage within in the lot boundary
- are located within a 1 kilometre radius of Transport for New South Wales designated train stations. Here commuter car parking prevents kerbside collection and ‘no parking’ signage is permitted only with approval from Transport for New South Wales. Train stations include Blacktown, Mount Druitt, Seven Hills, Quakers Hill and Schofields.

3. Subdivision and engineering works

This section applies to waste collection requirements for the design of new subdivisions and roads and constrained sites.

3.1 Objectives

a. Ensure that waste collection solutions are considered early in the design phase for subdivision and road design so they do not adversely impact on the neighbourhood amenity for future residents.

b. Ensure that the subdivision configuration, road and laneway design and block layout allow for the convenient and efficient collection of waste and recyclables from individual sites.

c. Consider any unique characteristics of the site and ensure that waste collection does not adversely impact on these characteristics.

3.2 Development controls

3.2.1 Preparing a waste management plan

A waste management plan is required to be submitted with every development application for subdivision and engineering works and must:

- demonstrate how the development will reduce waste by reuse and recycling of materials during subdivision and engineering works
- identify waste streams likely to be generated onsite and the approximate amounts by:
    - providing details and volumes of materials that can be reused and recycled from the construction site
    - identifying the condition of materials and any possible contamination by hazardous items such as asbestos containing material
    - nominating whether materials will be reused, recycled or removed from site
- outline options to increase waste avoidance and support the circular economy by:
    - utilising a purchasing policy that includes using pre-fabricated and recycled materials, specifying exact requirements of goods and materials, arrangement for delivery of materials on an ‘as needs’ basis, and the option to return excess stock to the supplier
    - determining storage requirements for goods and materials onsite, including the provision of a temporary storage area for materials generated by the construction activity that can be reused at a later stage
    - ensuring appropriate storage and management of goods and materials onsite for reuse whilst considering slope, drainage and location of waterways and vegetation
- outline how contractors and other relevant parties involved in the subdivision work, will be aware of their legal requirements for waste disposal and their responsibilities under the waste management plan by:
    - nominating how data on the generation of waste and recyclable materials will be collected

  - nominating how records (including dockets) on the lawful disposal and recycling of waste will be retained to ensure they are accessible for inspection by regulatory authorities
  - identifying onsite communication strategies, such as signage, toolbox talks and inductions
- indicate that internal loop roads, private driveways, community title roads and any other private road used for bin collections are designed to accommodate the weight of 24 tonne waste vehicles.

3.2.2 Preparing scaled site and floor plans

The waste management plan accompanying the development application must be supported by scaled site and floor plans that clearly identify the:

- nominated kerbside collection points for all future dwellings
  - Figure 1 shows suitable bin collection points and required clearances from parked cars, driveways, infrastructure and landscaping. It also indicates frontage requirements for bin collection of 3 metres x 1 metre for each dwelling including rear access subdivisions and battle axe blocks.
  - bin collections for laneway developments must be from perimeter roads in the first instance. Collections from within laneways may only be considered where site characteristics (such as topography and retaining walls), prevent safe and efficient waste collection from the perimeter roads.
- temporary turning heads (other than hammerheads) for staged subdivisions where the entire road network will not be completed as part of stage 1, or for any development where only half the road network is required to be constructed under the subject development application. This will ensure waste collection vehicles are able to enter and exit the development without the need to reverse. Photos 1 and 2 show road networks that have not allowed for truck movement. Photo 3 shows truck turning areas that have been obstructed by parked cars
- road design and engineering specifications for cul-de-sac and turning paths can accommodate waste collection vehicles in line with the Blacktown City engineering standards. Bin collection within cul-de-sac heads is not permitted. Manoeuvring waste collection vehicles into position to collect from these locations is problematic (refer to photos 4 and 5)
- loop roads, private driveways and/or community title roads
- subdivision design ensures waste collection vehicles can enter and exit the development in a forward direction, without the need to reverse.

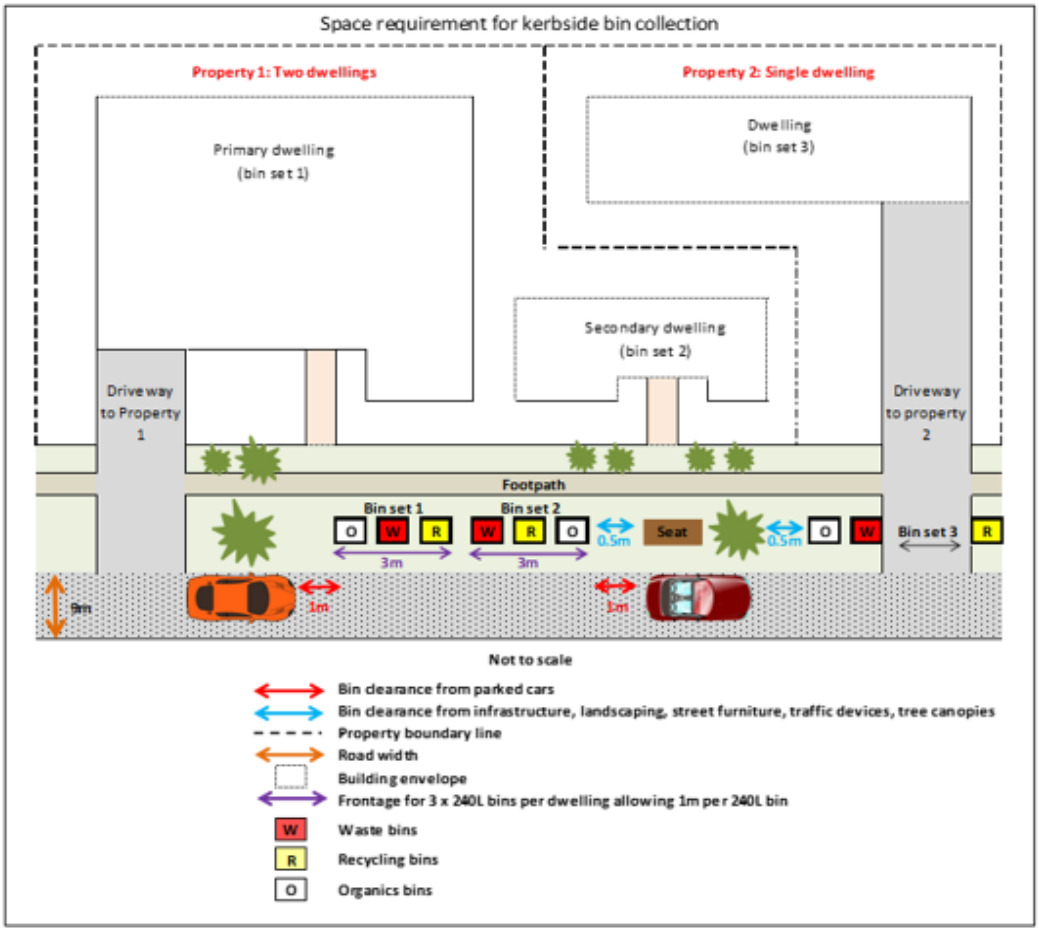


Figure 1: Spacing requirements for bins presented at the kerbside



Photo 1: Dead end road network that does not support truck movement



Photo 2: Cars parked in dead end road networks



Photo 3: Cars parked in dead end road networks and obstructing waste collection



Photo 4: Excessive bins presented within the cul-de-sac



Photo 5: Waste collection vehicle unable to extend to collect bins within the cul-de-sac

3.3 Additional considerations

3.3.1 Laneway developments

Where the development proposes waste collection from a laneway, the development must demonstrate:

- adequate sight lines along the entire length of the laneway. There must be no bends or obstacles that prevent safe manoeuvring of waste collection vehicles
- there are no obstructions that restrict Council's vehicle from servicing the development
- the bin collection point on one side of the laneway only and from the identified and designated bin collection point(s)
- 'no stopping' signage along the entire length of the laneway
- a safe exit strategy from the laneway in a forward direction for waste collection vehicles in case of an obstruction
- the laneway design includes a minimum 6 metre carriageway, a 1 metre verge on either side and garages setback a minimum 0.5 metres on each side
- the maximum bin travel distances for 240 litres bins do not exceed 30 metres
- the maximum bin transfer grades for 240 litres bins do not exceed 1:14.

3.3.2 Developments with internal loop roads and private roads

Where the development includes an internal loop road and/or a private road, and waste collection is proposed, the development must demonstrate:

- there are no obstructions that restrict Council's vehicle from servicing the development

- the bin collection point on one side of the internal loop road and/or private road where it is a through road. Suitable space for all required bins must be demonstrated
- 'no stopping' signage is installed along the entire length of the internal loop road and/or a private road where the designated bin collection points are located
- a safe exit strategy from the internal loop road and/or a private road in a forward direction for waste collection vehicles in case of an obstruction
- the internal loop road and/or a private road designed to include a minimum 6 metre carriageway, a 1 metre verge on either side and garages setback minimum 0.5 metres on each side
- the maximum bin travel distances for 240 litre bins do not exceed 30 metres
- the maximum bin transfer grades for 240 litre bins do not exceed 1:14.

In line with section 3.2, scaled site and floor plans are to be submitted with the waste management plan indicating that the development complies with these requirements.

3.3.3 Battle axe blocks

Where the proposal is for a battle axe block, the development must demonstrate:

- bin collection point(s) are situated on the frontage belonging to the subject development. Bins must not flow over to adjoining or neighbouring lots
- the maximum bin travel distances for 240 litre bins do not exceed 30 metres
- the maximum bin transfer grades for 240 litre bins do not exceed 1:14.

4. Demolition and construction

4.1 Objective

The objective of this section is to reduce waste generation and maximise reuse and recycling during any building demolition and construction stage of the development.

4.2 Development controls

4.2.1 Preparing a waste management plan

A waste management plan is to be submitted with every development application for demolition and construction and must demonstrate how reuse and recycling will be maximised and waste going to landfill reduced.

The waste management plan must indicate how waste reduction at the demolition and construction stages will be achieved allowing for reuse of solid waste either on or offsite through:

- staging of works
- appropriate onsite storage
- source separation.

The waste management plan must:

- identify volumes of waste materials likely to be generated from the demolition and construction activity
- identify the materials and their expected volumes that can be recycled or reused either on or offsite
- detail the methods chosen to ensure the separation of materials for reuse, recycling and disposal. Consideration must be given to environmental factors such as slope, drainage, location of waterways, stormwater outlets, vegetation, and access and handling requirements
- outline the arrangements that will be made with contractors to ensure materials that cannot be reused or recycled are safely separated and disposed of at licensed landfills. Receipts for all disposed materials must be kept and made available for inspection by regulatory authorities
- outline how asbestos containing material, hazardous and/or intractable wastes will be disposed of in line with WorkSafe NSW and Environment Protection Authority requirements. Refer to our policy on *Asbestos Management in Blacktown City* for more specific information on how to deal with asbestos containing materials
- outline measures for onsite litter management, including the methods to reduce airborne litter and litter entering the stormwater system
- detail methods used to reduce site disturbance and eliminate unnecessary excavation
- identify the condition of materials and any possible contamination from hazardous materials such as asbestos containing material

- comply with the required information as outlined in the waste management plan template in the *Blacktown City guideline for waste management in new developments*.

4.2.2 Preparing scaled site and floor plans

The waste management plan must be supported by scaled site and floor plans that clearly identify the:

- nominated area onsite for separate collection bins for residual waste. Bin and storage areas must be clearly signposted to identify their intended contents and purpose
- storage requirements for goods and materials onsite including the provision of a temporary storage area for materials generated by demolition and construction activity that can be used at a later stage.

5. Other development types

The following development controls apply to all other development types, including dwelling houses, residential development, multi dwelling housing development, affordable rental housing typologies, residential flat buildings, mixed use developments, commercial development and industrial development.

Refer to the matrix at **Appendix 1** for the relevant development controls that apply to your development.

The waste management plan accompanying your development application must address all the relevant development controls, as listed in the matrix for your development type.

5.1 Objective

a) Ensure the provision of appropriate and efficient waste storage and collection facilities that are easy to use, safe and well designed for residents, tenants and service providers.

b) Ensure that waste collection solutions are considered early in the design phase so they do not adversely impact on neighbourhood amenity, streetscape or safety for future residents, tenants and service providers.

c) Consider any unique characteristics of the site and ensure that waste collection does not adversely impact on these characteristics.

5.2 Development controls

5.2.1 Preparing a waste management plan

All development applications must be accompanied by a waste management plan that includes scaled site and floor plans that clearly identify compliance with the following specific requirements, (where applicable), as identified in the matrix at **Appendix 1**.

The scaled site and floor plans must clearly identify the proposed collection arrangement for the site including all the required waste features.

5.2.2 Internal waste and recycling storage

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the internal storage area for waste and recyclables that must hold a minimum of 1 days separated waste and recyclables. The storage area must be located within the kitchen, a non-habitable room or other convenient location.

This information needs to be shown on the plans for each dwelling, unit and/or tenancy.

5.3 Development controls – specific requirements

5.3.1 Daily bin storage

(a) Individual residential bins

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- daily bin storage area for 3 x 240 litre bins per dwelling allowing 1 metre per bin that is within the site boundary
- screening to the daily bin storage area so it cannot be viewed from public areas
- location of the daily bin storage area is away from windows on the subject lot or any known windows on the adjoining lot to reduce noise and odour nuisances
- daily bin storage area is designed as a hard stand surface, clear of pillars, support beams, services, air conditioning units and any other obstruction
- maximum walk distance for residents with bagged rubbish from their dwelling/unit to the daily bin storage area does not exceed 30 metres
- paved bin travel path from the daily bin storage area to the collection point
- daily bin storage area which is to exclude the garage or other area internal to a dwelling.

Note: Massing of bins and bulky waste

This note applies particularly to (a) individual residential bins, above, and (b) communal residential bins, below, but may apply to any development with bin massing.

Appropriate notice must be given to purchasers of lots which are likely to be affected by the location of waste facilities and/or bin collection points in a development. A public positive covenant pursuant to Section 88E of the Conveyancing Act 1919, will be imposed on all developments where waste facilities, bin and bulky waste storage areas and/or bin and bulky waste collection points impact streetscape, resident amenity, operational requirements and safety concerns for pedestrians and other road users. This includes, but is not limited to, developments with strata schemes, community tiles, and/or torrens title lots where bins and/or bulky waste have come from other locations (not accessible by waste vehicles), for collection.

(b) Communal residential bins

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify that:

- an appropriate and efficient waste storage system is selected for the site, ensuring all required bins can be appropriately accommodated in the communal waste room(s)
- interim waste room(s) and waste room(s) are located on the same level to avoid reliance on mechanical aids to move bins between the levels
- ground level waste room(s) are located behind the front building setback and integrated into the building footprint. It must be adequately designed and screened to ensure it is not visible from the street
- waste room(s) open straight onto the loading bay(s), allowing bins to be moved straight to the collection vehicle with minimal manual handling
- onsite collection point(s), must be located on the same floor as both the interim waste room(s) and waste room(s)
- access to the waste room(s) for residents is not via the loading bay(s)
- waste room(s) have separate access points for waste collection contractors and residents

- the location of any ground level waste room(s) is away from windows on the subject lot or any known windows on the adjoining lot to reduce noise and odour nuisances
- interim waste room(s) and waste room(s) are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction
- interim waste room(s) and waste room(s) are designed of regular shape (i.e. square or rectangular) that allow for the safe and practical use of these spaces and to assist in the cleaning of these facilities. These spaces must be a minimum 3 metres deep to allow for suitable bin rotation space
- interim waste room(s), if required, are designed and located so that the bins can be safely and efficiently transferred to the waste room(s) and collection point(s)
- interim waste room(s) and waste room(s) are not located within any communal open space, recreational areas or other resident amenity facilities onsite
- maximum walking distance for residents with bagged rubbish from their dwelling/unit to the applicable waste area does not exceed 30 metres
- bin travel path from the interim waste room(s) to the waste room(s)
- bin travel path from the waste room(s) to the collection point(s)
- width of all doorways in bin storage areas are a minimum 1.5 metres wide, excluding waste chute room(s) on residential floors.

(c) Non-residential development

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- selection of an appropriate and efficient waste storage system for the site ensuring all required bins can be appropriately accommodated in the waste room(s)
- waste room(s), where they are located at ground level, are to be situated behind the building line and integrated into the overall design of the building footprint. The waste room(s) must be adequately screened to ensure it is not visible from the street or public areas. Ground level waste room(s) must be designed to not detract from the overall character of the development
- interim waste room(s) and waste room(s) are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction.
- interim waste room(s) and waste room(s) a designed of regular shape (i.e. square or rectangular) that allow for the safe and practical use of these spaces and to assist in the cleaning of these facilities. These spaces must be a minimum 3 metres deep to allow for suitable bin rotation space
- interim waste room(s), if required, are designed and located so that the bins can be safely and efficiently transferred to the waste room(s) and collection point(s)
- interim waste room(s) and waste room(s) are not co-located with any communal open space, recreational areas or other resident amenity facilities onsite

- waste room(s) open straight onto the loading bay(s), allowing bins to be moved straight to the collection vehicle with minimal manual handling
- onsite collection point is located on the same level as the interim waste room(s) and waste room(s)
- maximum walk distance for staff with bagged rubbish from their commercial, retail or industrial premise to the relevant waste area does not exceed 30 metres
- bin travel path from the interim waste room(s) to the waste room(s)
- bin travel path from the waste room(s) to the collection point(s)
- access to the waste room(s) for anyone other than the building manager and waste contractors is not to be via the loading bay
- suitable storage provision (waste and recycling) for non-residential tenancies or businesses
- suitable provision of bins and signage for drive thru and take away outlets
- doorways in bin storage areas are a minimum 1.5 metres wide, excluding waste chute room(s) on residential floors
- location of refrigerated waste room(s) for any commercial tenancy producing more than 50 kilograms of meat, seafood or poultry waste daily in between collection cycles
- interim waste room(s) and waste room(s) are within the site boundaries and are adequate to accommodate all required bins for all operations across the site.

(d) Additional considerations for mixed use developments

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify, for the relevant components, the:

Residential component	• site has a different waste management system for the residential and commercial components in a mixed use development by: ○ providing separate chutes (if required) and chute discharge points ○ providing separate interim waste room(s) (if required) and waste room(s) ○ restricting commercial and retail staff access to the residential interim waste room(s) and waste room(s).
Commercial and retail component	• site has a different waste management system for the residential and commercial components in a mixed use development by: ○ providing separate chutes (if required) and chute discharge points ○ providing separate interim waste room(s) (if required) and waste room(s)

	○ restricting commercial and retail staff access to the residential interim waste room(s) and waste room(s)
Industrial component	• provision of different containers for tenancies to separate waste from their processes.

5.3.2 Bulky waste

(a) Individual residential bins

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- sufficient space on the kerbside of a public road for the placement of unwanted bulky waste clear of driveways, light and power poles, traffic management devices, street furniture, landscaping and trees. This requirement is in addition to the unobstructed frontage required for bin placement.

(b) Individual residential bins – developments serviced by private roads

Developments serviced by private roads may include laneways, loop roads, private driveways and/or community title roads.

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- an area for bulky waste collection that is adjoining the designated bin collection area
- line marking and sign posting for the onsite communal bulky waste collection point(s).

(c) Communal residential bins

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- bulky waste storage areas are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction
- bulky waste storage areas that are of a regular shape (i.e. square or rectangular) and have a minimum doorway width of 1.5 metres that allow for the safe and practical use of these spaces and to assist in the cleaning of these facilities. Rectangular shaped bulky waste storage areas must be a minimum 3 metres deep to allow for suitable use of these spaces
- bulky waste storage area(s) are caged across the front and signposted to identify potential hazards (see photos 6 and 7)
- bulky waste storage area(s) are of suitable size to accommodate the required bulky waste generation rate as outlined in the *Blacktown City guideline for waste management in new developments*
- the bulky waste storage area(s) as being located immediately adjacent to the waste room(s) and opening straight onto the loading bay(s) for collection.



Photo 6: Sign posted and caged bulky waste room



Photo 7: Caged bulky waste room located within the main waste room

(d) Communal residential bins – multi dwelling housing

In addition to c) above, the information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- line marking and sign posting for the onsite communal bulky waste storage and collection point(s).

(e) Non-residential development

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- bulky waste storage areas are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction
- bulky waste storage areas that are of regular shape (i.e. square or rectangular) that allow for the safe and practical use of these spaces and to assist in the cleaning of these facilities. Rectangular shaped bulky waste storage areas must be a minimum 3 metres deep to allow for suitable use of these spaces.
- the bulky waste storage area(s) being located immediately adjacent to the waste room(s) and opening straight onto the loading bay(s) for collection
- bulky waste storage area(s) are caged across the front and signposted to identify potential hazards.
- bulky waste storage provision for the retail, commercial component(s) and industrial development in accordance with the *Blacktown City guideline for waste management in new developments*

5.3.3 Chutes

Waste chutes are required in all developments of 3 storeys or more with a lift and containing residential dwellings/units. This includes mixed use developments with a residential component.

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- chutes proposed for the development are for waste only
- storage of a 240 litre recycling bin in each waste chute room on each residential floor
- chute room on each residential floor is sufficient in size to hold bulk cardboard
- chute room on each residential floor is suitably designed to cater for wheelchair access in line with the relevant Australian Standard (see Figure 2)
- chute discharge point. This must be suitably caged (or enclosed) to prevent injury with sufficient circulation space around the equipment for bin rotation as per the manufacturer's specifications.

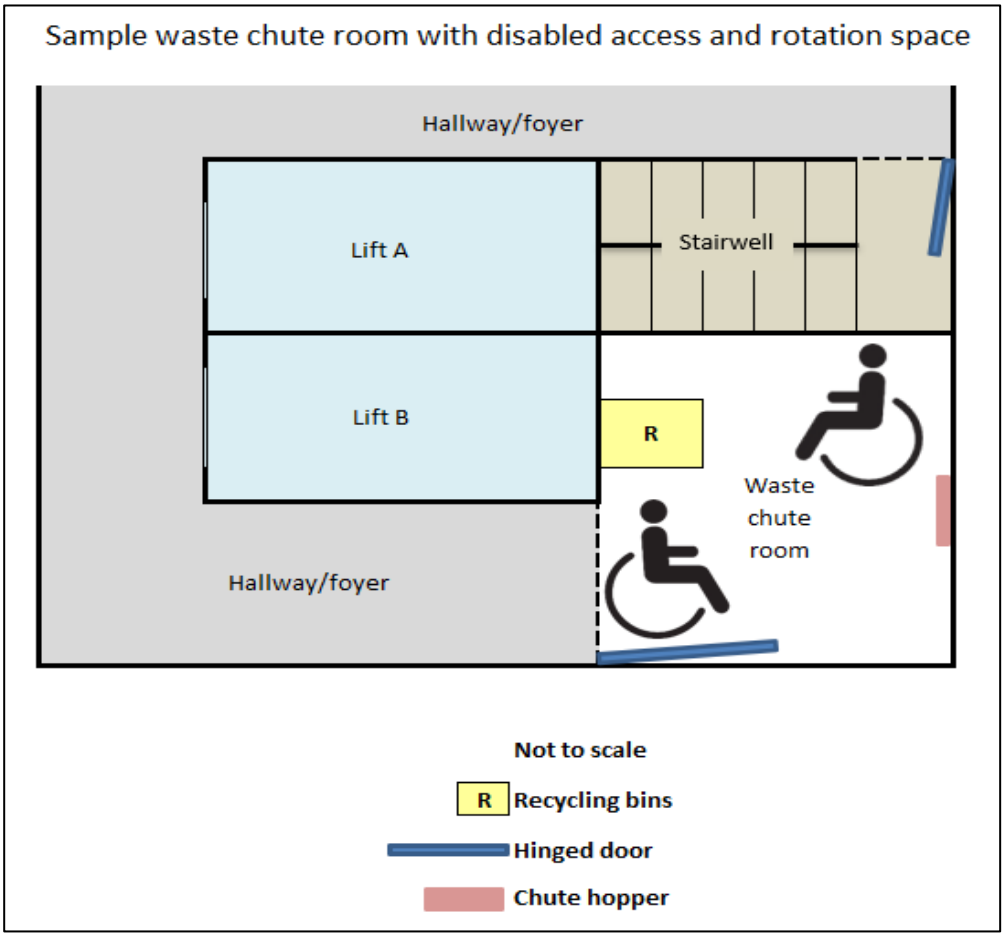


Figure 2: Waste chute room with wheelchair access and rotation space

5.3.4 Bin travel distances

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify a maximum:

- 30 metre bin travel distance for bins up to 360 litres
- 10 metre bin travel distance for bins over 360 litres and up to 1,100 litres
- 3 metre bin travel distance for bins more than 1,100 litres.

If any of the above distances are exceeded, a bin movement aid will be required for the site.

(a) Bin movement aids (other than industrial developments)

The documentation submitted with the development application must:

- provide details of the bin movement aid for the site if bin travel distances are exceeded (e.g. seated bin tug and trolley attachment)
- provide details of a suitable and secure storage area that caters for the proposed equipment, which is also located adjacent to the loading bay(s) and collection point(s). This area must be identified on the plans submitted with the development application. The *Blacktown City guideline for waste management in new developments* provides further information
- provide a power point to charge the bin movement aid

- carefully select bin movement aids considering the distance bins need to be moved across a site to get them from an interim waste room(s) to the waste room(s) and collection point(s). Motorised seated bin movement aids with trolley attachments are preferred for sites 1,500 square metres or more.

5.3.5 Bin travel paths

(a) Individual residential bins

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify a:

- bin travel path from the daily bin storage area to the kerbside collection point that does not contain any steps, lips or obstructions
- paved bin travel path that is a minimum 1 metre wide.

(b) Communal residential bins

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify a:

- bin travel path from the interim waste room(s) to the waste room(s) (if required) that is clear of steps, lips or obstructions
- bin travel path from the waste room(s) to the collection point(s) that is clear of steps, lips or obstructions
- paved bin travel path that is a minimum 1 metre wide.

Refer to the *Blacktown City guideline for waste management in new developments* for further information.

(c) Non-residential development

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify a:

- bin travel path from the interim waste room(s) (if required) to the waste room(s) that is clear of steps, lips or obstructions
- bin travel path from the waste room(s) to the collection point(s) that is clear of steps, lips or obstructions
- paved bin travel path is a minimum 1 metre wide.

Refer to the *Blacktown City guideline for waste management in new developments* for further information.

5.3.6 Bin transfer grades

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify bin transfer grades do not exceed:

- 1:14 for bins up to 360 litres
- 1:24 for 660 litre and 1,100 litre bulk bins.

5.3.7 Collection points

We do not support the following collection methods for developments which require onsite collection as identified by the matrix at **Appendix 1**:

- onsite collection at ground level within the front building setback
- onsite collection where it is proposed that waste vehicles must reverse into or out of the site via footpaths and public areas as this increases unnecessary risk
- drive through collection via an indented bay within the front setback
- kerbside collection

We may consider the use of truck turntables to facilitate onsite collection when demonstrated suitable to the satisfaction of Council.

(a) Individual residential bins

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- nominated collection point
- available unobstructed frontage for bin collection measuring 3 metres x 1 metre for each dwelling clear of garages, driveways, light and power poles, traffic management devices, street furniture, landscaping and trees. See Figure 1 on page 13.
- bins are placed for collection within the boundary of the subject site. Bins must not flow over onto adjoining lots

The documentation submitted with the development application in relation to waste must:

- nominate whether bin collection will be provided by Council or a private waste contractor
- confirm that an agreement will be signed with Council (where onsite collection of residential bins is required), to indemnify Council against claims for loss or damage (see the *Blacktown City guideline for waste management in new developments*). This agreement must be signed by the elected strata management company on behalf of all landowners prior to issue of any Occupation Certificate for the development. Bin collection by Council will not occur until a signed agreement is in place.

(b) Multi-dwelling housing developments

Kerbside collection from a public road may be supported for multi-dwelling housing developments with 7 dwellings or less.

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- available space for bin collection measuring 3 metres x 1 metre along the internal loop road and private road for each dwelling clear of garages, driveways, light and power poles, traffic management devices, street furniture, landscaping and trees. See Figure 1 in section 3.2 for further information.

Onsite collection is required for multi-dwelling housing developments with 8 or more dwellings due to the significant number of bins placed at the kerb, the time needed for

collection and the resulting amenity, neighbourhood character and safety issues (see photo 8).

Where it can be demonstrated that onsite collection is not possible for the site, kerbside collection from a public road may be permitted if it will not adversely impact on the visual appearance of the streetscape or result in amenity and safety issues.

In reviewing whether kerbside collection is appropriate or not, consideration will be given to:

- the location of the proposed development. We will generally not support kerbside collection if the development is located on a busy road
- the total number of bins needed for the site
- the available street frontage(s)
- any other relevant factors.

Kerbside collection will not be supported for multi-dwelling housing developments with individual bins for each lot and access to the site is through a cul-de-sac head where bin collection is proposed. Onsite collection is required for these developments



Photo 8: Excessive bins presented at the kerbside

(c) Residential communal bins

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- location of the basement collection point for residential flat buildings or developments with a residential component on sites 1,500 square metres or more
- location of the basement collection point (as the preferred arrangement) for residential flat buildings or developments with a residential component on sites less than 1,500 square metres

- ground level collection point (including truck turning and bin storage) when basement collection is not achievable due to site characteristics. In this case, the waste collection point(s) must be incorporated into the building footprint at ground level and located towards the rear of the site behind the building setback.
- undercroft collection area(s) at ground level, if permitted for the site, are located towards the rear of the site and behind the building line
- loading bay(s) and truck travel paths are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction that would hinder safe passage for waste collection vehicles
- onsite collection point(s), which must be located on the same level as the interim waste room(s) and waste room(s). Designs proposing that bins be stored in the basement but collected at ground level will not be supported.

The documentation submitted with the development application in relation to waste must:

- nominate whether bin collection will be provided by Council or a private waste contractor
- indicate provision of a building manager in perpetuity to manage the waste collection arrangement for the site. This includes, but is not limited to, placement and withdrawal of bins for collection, cleaning bins, managing illegal dumping and providing access to the loading bay (e.g. collapsing bollards or opening roller doors). The requirement for the provision of a building manager will be a condition of any development consent
- confirm that an agreement will be signed with Council (where onsite collection of residential bins is required), to indemnify Council against claims for loss or damage (see the *Blacktown City guideline for waste management in new developments*). This agreement must be signed by the elected strata management company on behalf of all landowners prior to issue of any Occupation Certificate for the development. Bin collection by Council will not occur until a signed agreement is in place.

(d) Boarding houses

Kerbside collection may be permitted from a public road for developments with 10 rooms or less if suitable frontage for the required number of bins can be demonstrated.

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- available space for all the required bins for the site. Frontage must be clear of garages, driveways, light and power poles, traffic management devices, street furniture, landscaping and trees. See Figure 1 in section 3.2 for further information.

Onsite collection is required developments with 11 rooms or more.

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- the onsite collection point for waste, recyclables and bulky waste
- if an onsite caretaker is proposed.

(e) Isolated sites

Consideration may be given to a collection point(s) at-grade to the rear of the site and behind the building line where it can be demonstrated to be of benefit to the development.

The documentation submitted with the development application in relation to waste must demonstrate improved outcomes for building design, resident and occupant amenity, and functionality of the waste management system when locating the collection point at-grade.

(f) Mixed use

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- alternative onsite collection point for mixed use developments where it can be demonstrated that the site is unsuitable for basement collection. In these circumstances, the application will need to demonstrate that the development can provide an effective and efficient residential waste collection system that is compatible with Council's standard waste service
- waste and recyclables will be collected onsite
- loading bay(s) and truck travel paths are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction that would hinder safe passage for waste collection vehicles
- onsite collection point(s), which must be located on the same level as the interim waste room(s) and waste room(s)

The documentation submitted with the development application in relation to waste must:

- nominate whether bin collection for the residential component of a mixed use development will be provided by Council or a private waste contractor. Bin collection for the retail and commercial component(s) must be serviced by private contractors
- indicate provision of a building manager in perpetuity to manage the waste collection arrangement for the site. This includes, but is not limited to, placement and withdrawal of bins for collection, cleaning bins, managing illegal dumping and providing access to the loading bay (e.g. collapsing bollards or opening roller doors). The requirement for the provision of a building manager will be a condition of any development consent
- confirm that an agreement will be signed with Council (where onsite collection of residential bins is required), to indemnify Council against claims for loss or damage (see the *Blacktown City guideline for waste management in new developments*). This agreement must be signed by the elected strata management company on behalf of all landowners prior to issue of any Occupation Certificate for the development. Bin collection by Council will not occur until a signed agreement is in place
- include a loading dock management plan to detail all proposed uses of the space and the management of competing services. Council will not provide service windows for waste collection.

(g) Commercial

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- alternative onsite collection point for commercial developments where it can be demonstrated that the site is unsuitable for basement collection. In these circumstances, the application will need to demonstrate that the development can still provide an effective and efficient waste collection system
- loading bay(s) and truck travel paths are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction that would hinder safe passage for waste collection vehicles
- onsite collection point(s), which must be located on the same level as the interim waste room(s) and waste room(s). Designs proposing that bins be stored in the basement but collected at ground level will not be supported.

The documentation submitted with the development application in relation to waste must:

- state that all waste, recyclables and bulky waste collections will be by a private contractor
- include a loading dock management plan to detail all proposed uses of the space and the management of competing services. Council will not provide service windows for waste collection.

(h) Centre-based child care facility

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- kerbside collection point if the number of proposed enrolments at the centre will result in a maximum 7 x 240 litre bins. The bin requirement will be based on compliance with the waste and recycling generation rates as outlined in the EPA *Better Practice Guide for Resource Recovery in Residential Developments 2019*
- onsite collection point if the number of proposed enrolments at the centre will result in 8 x 240 litre bins or more. The bin requirement will be based on compliance with the waste and recycling generation rates as outlined in the EPA *Better Practice Guide for Resource Recovery in Residential Developments 2019* for childcare centres
- loading bays and truck travel paths for onsite collection are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction that would hinder safe passage for waste collection vehicles
- onsite collection point(s) are located on the same level as the interim waste room(s) and waste room(s)

The documentation submitted with the development application in relation to waste must:

- state how all waste, recyclables and bulky waste collections will be undertaken
- include a loading dock management plan to detail all proposed uses of the space and the management of competing services where applicable to the proposal. Council will not provide service windows for waste collection.

(i) Industrial

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify the:

- loading bays and truck travel paths for onsite collection are designed clear of pillars, support beams, services, air conditioning units, sprinklers and any other obstruction that would hinder safe passage for waste collection vehicles
- onsite collection point(s) are located on the same level as the interim waste room(s) and waste room(s)
- onsite loading bay(s) are located immediately adjacent to the waste room(s).

The documentation submitted with the development application in relation to waste must:

- state that all waste, recyclables and bulky waste collections will be by a private contractor
- include a loading dock management plan to detail all proposed uses of the space and the management of competing services. Council will not provide service windows for waste collection.

5.3.8 Onsite truck access

The matrix (see **Appendix 1**) identifies the suitable truck for each development type. See *Blacktown City guideline for waste management in new developments* for further information on truck specifications.

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- swept paths for the trucks entire travel path including forward entry and exit and around the collection point. This must be demonstrated without the use of a turntable
- the truck can access the collection point without the need to reverse outside of the site boundaries or intrude on landscaped areas. Onsite 3-point turns are acceptable
- the minimum vertical clearance along the vehicles entire travel path and any turning area in line with *Blacktown City guideline for waste management in new developments*
- for any collection occurring in a basement, the ramp grades and changes of rate of grade on the ramp do not exceed 15.4%, in line with *Australian Standard AS2890.2 Parking Facilities: Off-Street Commercial Vehicle Facilities* (Tables 3.2 and 3.3)
- that the truck travel path is rated suitable for a 24 tonne truck.

The applicant must provide a lock box immediately outside the entry point to each building of a residential development to store the waste room keys in case of an emergency (see photo 9). The lock box must be keypad operated with the code provided at Occupation Stage. Collection contractors must also have a key at Occupation Stage.



Photo 9: Key lock box outside entry point

5.3.9 Loading bays

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- the proposed physical treatment of the loading bay to prevent unauthorised parking in this area. Measures to achieve this could include a security gate, lockable removable bollards (see photo 10), roller doors and/or other devices in the proposed at-grade, undercroft or basement collection area(s) to maintain truck turning areas. This requirement will be in addition to any line marking and/or no stopping signage proposed for the site. A requirement that a building manager provide access to this area for collection vehicles will be a condition of any development consent
- that the loading bay can accommodate the entire length of the required collection vehicle, plus an additional 3 metre front or rear clearance (whichever applies), for bin servicing and rotation. The design must ensure that the truck does not overhang the length of the loading bay or adversely impact traffic flow onsite

- that the loading bay is a minimum 3.5 metres wide in line with *Australian Standard AS 2890.2 Parking Facilities: Off-Street Commercial Vehicle Facilities* (Table 4.1) to accommodate the collection vehicle plus an additional minimum 300 millimetre clearance on either side of the vehicle for movement. The design must ensure that the truck does not overhang the width of the loading bay or adversely impact traffic flow onsite.



Photo 17: Waste rooms opening onto line marked and treated loading bay

5.3.10 Loading dock management plan

A loading dock management plan is required for any site where competing uses of the loading bay for waste collection, general servicing and/or deliveries exists.

In compiling a loading dock management plan, the applicant must take into consideration that Council will not provide service windows for residential waste collection in mixed use developments.

Considerations for accommodating competing uses, include:

- coordinating uses of the loading bay (other than for residential waste collection) to occur outside Council collection hours
- developing a suitable exit strategy from the collection area if the loading dock is occupied. Design must ensure forward entry to and exit from the site.

If Council determines that suitable access cannot be achieved, a dedicated loading bay for residential waste collection will be required.

At a minimum, the loading dock management plan must address:

- site and dock access
- dock configuration
- all dock users and services
- responsibilities of the loading dock manager
- operation and scheduling
- physical treatment of the area to prevent unauthorised parking
- line marking and signposting.

A copy of the approved waste management plan must be included as an appendix.

5.3.11 Plan of management

(a) Boarding house developments

The documentation submitted with the development application in relation to waste must include a plan of management for the site that contains the proposed waste arrangements. This is in addition to the waste management plan.

The plan of management must state:

- that no bins will be placed in the collection point(s) outside the scheduled collection time for the area
- that it is the caretaker's/building manager's responsibility to transfer all bins to their nominated collection point(s) and withdraw them by 7 pm on the day of service in line with collection schedules for the area
- that it is the caretaker's/building manager's responsibility to clean the bins and the waste room(s)
- the proposed method of communication to new tenants and residents on the waste management services and collection system for the site
- the nominated collection point(s) for waste and recycling bins, and bulky waste from the site
- number and capacity of the bins needed for the site
- how waste will be managed during occupation including bulky waste and illegal dumping

A copy of the approved waste management plan must be included as an appendix.

6. Appendix 1 – Matrix

Typology			Dwelling houses (single unit)	Dual occupancy	Multi-dwelling housing			Residential flat buildings and/or build to rent housing		Boarding houses and/or co-living		
Design			Including group homes, secondary dwellings, detached studios and semi-detached dwellings		7 units or less	8 units or more with individual bins and loop road	8 units or more with shared bins and no loop road	sites under 1500sqm	sites 1500sqm or more	10 rooms or less	11 rooms or more and/or sites less than 1500sqm	Sites 1500sqm or more
Collection method			Kerbside - side lift vehicle	Kerbside - side lift vehicle	Kerbside - side lift vehicle	Onsite at grade - side lift vehicle	Onsite at grade - rear lift vehicle	Onsite at grade - rear lift vehicle	Onsite from basement - rear lift vehicle	Kerbside - side lift vehicle	Onsite at grade - rear lift vehicle	Onsite from basement - rear lift vehicle
Development Control Plan sections and references	Waste management plan	5.2.1	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Internal waste and recycling storage	5.2.2	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Daily bin storage	5.3.1	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Bulky waste	5.3.2	✘	✘	✘	✔	✔	✔	✔	✔	✔	✔
	Chutes	5.3.3	✘	✘	✘	✘	✘	✔	✔	✘	✔	✔
	Bin travel distances	5.3.4	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Bin travel paths	5.3.5	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Bin transfer grades	5.3.6	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Collection points	5.3.7	✔	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Onsite truck access	5.3.8	✘	✘	✘	✔	✔	✔	✔	✘	✔	✔
	Loading bays	5.3.9	✘	✘	✘	✘	✔	✔	✔	✘	✔	✔
	Loading dock management plan	5.3.10	✘	✘	✘	✘	✘	✘	✘	✘	✘	✘
	Plan of Management	5.3.11	✘	✘	✘	✘	✘	✘	✘	✔	✔	✔

Note: for any development proposal, applicants must also consult Sections 1 to 4 (inclusive).

Typology			Seniors housing				
Design			multi dwelling housing- 7 units or less	multi-dwelling housing - 8 units or more with individual bins and loop road	multi-dwelling housing - 8 units or more with shared bins and no loop road	residential flat building - sites under 1500sqm	residential flat building - sites 1500sqm or more
Collection method			Kerbside - side lift vehicle	Onsite at grade - side lift vehicle	Onsite at grade - rear lift vehicle	Onsite at grade - rear lift vehicle	Onsite from basement - rear lift vehicle
Development Control Plan sections and references	Waste management plan	5.2.1	✓	✓	✓	✓	✓
	Internal waste and recycling storage	5.2.2	✓	✓	✓	✓	✓
	Daily bin storage	5.3.1	✓	✓	✓	✓	✓
	Bulky waste	5.3.2	✗	✗	✓	✓	✓
	Chutes	5.3.3	✗	✗	✗	✓	✓
	Bin travel distances	5.3.4	✓	✓	✓	✓	✓
	Bin travel paths	5.3.5	✓	✓	✓	✓	✓
	Bin transfer grades	5.3.6	✓	✓	✓	✓	✓
	Collection points	5.3.7	✓	✓	✓	✓	✓
	Onsite truck access	5.3.8	✗	✓	✓	✓	✓
	Loading bays	5.3.9	✗	✗	✓	✓	✓
	Loading dock management plan	5.3.10	✗	✗	✗	✗	✗
	Plan of Management	5.3.11	✗	✗	✗	✗	✗

Note: for any development proposal, applicants must also consult Sections 1 to 4 (inclusive).
The requirements for seniors housing don't include waste collection requirements for a residential aged care facility. If your development application includes a residential aged care facility component, contact Council's Sustainable Resources section for further information.

Typology			Shop top housing			Small office, home office (SOHO)			Mixed use, hotel, motel, serviced apartments, retail and/or commercial premises		
Design			7 units or less	8 units or more with individual bins and loop road	8 units or more with shared bins and no loop road	7 units or less	8 units or more with individual bins and loop road	8 units or more with shared bins and no loop road	sites under 1500sqm	sites 1500sqm or more	sites of variable size with proposed supermarket
Collection method			Kerbside - side lift vehicle	Onsite at grade - side lift vehicle	Onsite at grade - rear lift vehicle	Kerbside - side lift vehicle	Onsite at grade - side lift vehicle	Onsite at grade - rear lift vehicle	Onsite at grade - rear lift vehicle	Onsite from basement - rear lift vehicle	Onsite at grade - front or rear lift vehicle
Development Control Plan sections and references	Waste management plan	5.2.1	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Internal waste and recycling storage	5.2.2	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Daily bin storage	5.3.1	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Bulky waste	5.3.2	✓	✓	✓	✗	✗	✗	✓	✓	✓
	Chutes	5.3.3	✓	✓	✓	✗	✗	✗	✓	✓	✓
	Bin travel distances	5.3.4	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Bin travel paths	5.3.5	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Bin transfer grades	5.3.6	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Collection points	5.3.7	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Onsite truck access	5.3.8	✗	✓	✓	✗	✓	✓	✓	✓	✓
	Loading bays	5.3.9	✗	✓	✓	✗	✗	✓	✓	✓	✓
	Loading dock management plan	5.3.10	✗	✓	✓	✗	✗	✗	✓	✓	✓
	Plan of Management	5.3.11	✗	✗	✗	✗	✗	✗	✗	✗	✗

Note: for any development proposal, applicants must also consult Sections 1 to 4 (inclusive).

Typology			Centre-based child care facility			Educational establishment	Industrial
Design			up to 7 bins	8 bins or more and/or sites less than 1500sqm	sites 1500sqm or more	sites of variable size	sites of variable size
Collection method			Kerbside - side lift vehicle	Onsite at grade - front or rear lift vehicle	Onsite from basement - front or rear lift vehicle	Onsite at grade - front or rear lift vehicle	Onsite at grade - front or rear lift vehicle
Development Control Plan sections and references	Waste management plan	5.2.1	✔	✔	✔	✔	✔
	Internal waste and recycling storage	5.2.2	✔	✔	✔	✔	✔
	Daily bin storage	5.3.1	✔	✔	✔	✔	✔
	Bulky waste	5.3.2	✔	✔	✔	✔	✔
	Chutes	5.3.3	✘	✘	✘	✘	✘
	Bin travel distances	5.3.4	✔	✔	✔	✔	✔
	Bin travel paths	5.3.5	✔	✔	✔	✔	✔
	Bin transfer grades	5.3.6	✔	✔	✔	✔	✔
	Collection points	5.3.7	✔	✔	✔	✔	✔
	Onsite truck access	5.3.8	✘	✔	✔	✔	✔
	Loading bays	5.3.9	✘	✔	✔	✔	✔
	Loading dock management plan	5.3.10	✘	✘	✘	✘	✔
	Plan of Management	5.3.11	✘	✘	✘	✘	✘
Note: for any development proposal, applicants must also consult Sections 1 to 4 (inclusive).							