

Blacktown City Council's guideline for waste management in new developments

Blacktown City Council

1. Introduction 6
1.1 Definitions 6
2. Waste management plan 12
2.1 Preparing a waste management plan 12
2.2 What must it include? 12
2.3 Generation rates 13
2.4 Collection frequencies 15
2.5 Compaction rates 15
2.6 Waste equipment 15
2.7 Waste systems and technologies 15
2.8 Waste management platforms and tools 16
2.9 Council's Abandoned Shopping Trolley Policy 16
3. Subdivision and engineering works 19
3.1 Laneways, internal loop roads and/or private roads 19
4. Checklists 22
4.1 Demolition 22
4.2 Construction 23
5. Daily bin storage 24
5.1 Individual bins 24
5.2 Communal bins 25
6. Bulky waste 37
6.1 Individual residential bins - private roads 37
6.2 Communal residential bins 38
6.3 Storage - developments with private roads 39
6.4 Storage - communal residential bins 39
6.5 Storage - non-residential development 40
7. Chutes 41
7.1 Design 41
7.2 Chute contingency 41
8. Bin movement 41
8.1 Bin movement aids 41
9. Collection 42
9.1 Kerbside collection 42
9.2 Onsite collection 46
10. Private contractors 48
10.1 Selecting private contractors 48
10.2 Section 88E for private contractors 48

11. Truck access 49
11.1 Minimum design requirements 49
11.2 Demonstrating onsite truck access 50
11.3 Rear lift collection vehicles 50
11.4 Side lift collection vehicles 51
11.5 Front lift collection vehicles 51
11.6 Hook lift collection vehicles 51
11.7 Constrained sites 51
12. Appendix 1 - matrix 52
13. Appendix 2 - additional information 57
14. Appendix 3 - onsite collection agreement 59
15. Appendix 4 - waste management plan template 62

Table of photos

Photo 1: Abandoned shopping trolleys polluting waterways 18
Photo 2: Abandoned shopping trolleys used for illegal dumping along the kerbside 17
Photo 3: Collection from one side of the laneway, loop road and/or private road only 19
Photo 4: Designated bin collection points with unit numbers indicated 20
Photo 5: Designated bin collection points with unit numbers indicated 20
Photo 6: Laneway, loop road and/or private road design and 'no stopping' signage 21
Photo 7: A communal waste room with enough space for bin storage and rotation 26
Photo 8: The impact of insufficient or no bulky waste storage onsite 40
Photo 9: The impact of insufficient or no bulky waste storage onsite 40
Photo 10: Correct bin placement - bins are placed in single file at the kerbside 43
Photo 11: Correct bin placement - bins are placed in single file at the kerbside 43
Photo 12: Incorrect bin placement - bins must not be stacked at the kerbside 44
Photo 13: Unsuitable bin collection point – parked cars prevent collection 45
Photo 14: Unsuitable bin collection point – parked cars prevent collection 45
Photo 15: Unsuitable bin collection points with inadequate space for bins 46

Table of figures

Figure 1: Waste storage area for a single dwelling with kerbside collection 24
Figure 2: Kerbside collection point with 7 multi-dwelling housing lots 25
Figure 3: Communal waste room layout (multi-dwelling housing) 27
Figure 4: Communal waste room layout (residential flat building) 28
Figure 5: Waste room location with onsite collection (multi-dwelling housing) 29
Figure 6: Collection point and waste room location - ground level (residential flat buildings) 30
Figure 7: Collection point and waste room location - basement (residential flat building) 31
Figure 8: Collection point and multiple waste rooms - basement (residential flat building) 32
Figure 9: Collection point and separate waste rooms - ground level (mixed use developments) 33
Figure 10: Collection point and separate waste rooms - basement (mixed use developments) 34
Figure 11: Communal bin and bulky waste collection points (multi-dwelling housing) 37
Figure 12: Location for bulky waste storage area - ground level (residential flat building) 38
Figure 13: Location for bulky waste storage area - basement (residential flat building) 39
Figure 14: Space requirement for kerbside bin collection 42

Table of tables

Table 1: Opportunities to reuse and recycle building materials 22
Table 2: Ways to reduce waste through the demolition and construction stages 23
Table 3: Design considerations for communal waste rooms 35

Table 4: The result of a poorly designed and planned waste room 36
Table 5: Typical wheelie bin dimensions 36
Table 6: Typical bulk bin dimensions 36
Table 7: Poorly designed commercial waste collection point 47
Table 8: Council's side lift collection vehicle dimensions 49
Table 9: Council's rear lift collection vehicle dimensions 49

Table of templates

Template 1: Council's vehicle specification 50

1. Introduction

Part G – Waste management and minimisation the *Blacktown Development Control Plan 2015* (DCP 2015) sets out the requirements for waste management in new developments. This guideline must be read in conjunction with Part G Waste management and minimisation as both documents will be used to assess a development application.

1.1 Definitions

Attached dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Boarding house	As defined by *Blacktown Local Environmental Plan 2015*
Build to rent housing	As defined by the *State Environmental Planning Policy (Housing) 2021*
Bulky waste	Large bulky items like lounges, fridges, furniture, mattresses, pallets or whitegoods.
Bulky waste storage	An area designed to store any unwanted bulky waste items from residential, retail, commercial or industrial developments.
Centre-based child care facility	As defined by *Blacktown Local Environmental Plan 2015*
Chute	Ventilated, vertical and inclined pipes or ducts passing through a multi-storey building with access on each floor. Chutes discharge into bins at the lowest point in the waste room.
Class 10 structure	As defined by the *National Construction Code*
Clinical waste	Waste generated from medical, nursing, dental, veterinary, pharmaceutical or similar operations that requires collection by authorised waste contractors.
Co-living housing	As defined by *Blacktown Local Environmental Plan 2015*
Collection point	The permitted area on a footpath, roadway or private property (where applicable) that waste, recyclables and bulky waste are loaded into collection vehicles.
Commercial premise	As defined by *Blacktown Local Environmental Plan 2015*
Commercial tenancy	A tenant of a premises used as a business, office or retail outlet.
Commercial waste	Any solid waste generated by commercially rated properties. This excludes liquid, clinical, or demolition and construction waste.
Communal waste room	This is a waste room that is shared by residents in a residential development, or staff in a retail, commercial and/or industrial development.
Compactor	A machine for compressing waste into bins.
Daily bin storage area	Dedicated area where bins are located within the property or tenancy.

Demolition and construction waste	Materials excavated from or on the site, such as: • rock and soil • waste asphalt, bricks, concrete, plasterboard, timber and vegetation • asbestos containing material, hazardous materials and contaminated soil.
Detached studio	As defined by the *State Environmental Planning Policy (Exempt and Complying Development Codes) 2008*
Domestic recycling service	The service to collect recyclable material from households.
Domestic waste	Waste generated by households.
Dual occupancy	As defined by *Blacktown Local Environmental Plan 2015*
Dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Dwelling house (single unit)	As defined by *Blacktown Local Environmental Plan 2015*
Educational establishment	As defined by *Blacktown Local Environmental Plan 2015*
Experienced waste consultant	A waste consultant with a minimum 5 years industry experience.
Garbage	Waste material other than trade or special waste, liquid waste or recyclable materials.
Group home	As defined by the *State Environmental Planning Policy (Housing) 2021*
Hotel or motel accommodation	As defined by *Blacktown Local Environmental Plan 2015*
Internal lots	Lots or dwellings that do not front a public road including lots serviced via an access handle in a battle-axe development.
Internal loop road	A road which allows waste collection vehicles to enter and exit the site in a forward direction with a maximum of 3 reverse movements. This may include straight through roads or private roads with a cul-de-sac head.
Internal waste and recycling storage	This is a cupboard, drawer or other suitable area located within each dwelling or lot for the storage of 1 days' waste and recyclables.
Interim waste room	These are waste rooms adjacent to lifts in the basement or other locations where bins are stored until they need to be moved to the main waste room.
Intractable waste	Waste that is hard to control or deal with. This includes waste that is: • flammable

	• infectious • corrosive.
Isolated sites	Sites which have been physically built out and can't comply with the frontage requirements for redevelopment because the adjoining sites have already been developed.
Kerbside collection point	The designated waste collection point at the edge of a formed road.
Mixed use development	As defined by *Blacktown Local Environmental Plan 2015*
Mobile garbage bin	A bin up to 1,100 litres capacity with wheels that allow it to be moved around.
Multi-dwelling housing	As defined by *Blacktown Local Environmental Plan 2015*
Ongoing waste management	Management of waste generated onsite during occupancy.
Recyclable	Capable of being reprocessed into useable material.
Reuse	Capable of being used again without being processed.
Residential flat building	As defined by *Blacktown Local Environmental Plan 2015*
Residual waste	Material that cannot be recycled.
Retail premise	As defined by *Blacktown Local Environmental Plan 2015*
Secondary dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Semi-detached dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Seniors housing	As defined by *Blacktown Local Environmental Plan 2015*
Serviced apartments	As defined by *Blacktown Local Environmental Plan 2015*
Shop top housing	As defined by *Blacktown Local Environmental Plan 2015*
Site waste bins	Robust containers provided for surplus and unwanted materials onsite during construction activity.
Special waste	Clinical, intractable or hazardous waste, chemicals and other products that require special care and disposal at a specialist facility.
Truck turntable	A circular motorised platform within the ground that rotates a truck whilst parked.
Undercroft	A space under a building on columns without walls.
Waste avoidance	Action to reduce the amount of waste generated by households, commerce, industry and all levels of government.
Waste	As defined under the *Protection of the Environment Operations Act 1997*

Waste chute room	A room located on each floor of a building that houses the access point to a waste chute and a mobile recycling bin.
Waste management plan	A document that provides details on the expected volumes and types of waste to be generated onsite and how it will be stored and managed.
Waste room	A room that is located adjacent to or adjoining a loading bay where garbage and recycling bins for the site are stored awaiting reuse or collection.
Attached dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Boarding house	As defined by *Blacktown Local Environmental Plan 2015*
Build to rent housing	As defined by the *State Environmental Planning Policy (Housing) 2021*
Bulky waste	Large bulky items like lounges, fridges, furniture, mattresses, pallets or whitegoods.
Bulky waste storage	An area designed to store any unwanted bulky waste items from residential, retail, commercial or industrial developments.
Centre-based child care facility	As defined by *Blacktown Local Environmental Plan 2015*
Chute	Ventilated, vertical and inclined pipes or ducts passing through a multi-storey building with access on each floor. Chutes discharge into bins at the lowest point in the waste room.
Class 10 structure	As defined by the *National Construction Code*
Clinical waste	Waste generated from medical, nursing, dental, veterinary, pharmaceutical or similar operations that requires collection by authorised waste contractors.
Co-living housing	As defined by *Blacktown Local Environmental Plan 2015*
Collection point	The permitted area on a footpath, roadway or private property (where applicable) that waste, recyclables and bulky waste are loaded into collection vehicles.
Commercial premise	As defined by *Blacktown Local Environmental Plan 2015*
Commercial tenancy	A tenant of a premises used as a business, office or retail outlet.
Commercial waste	Any solid waste generated by commercially rated properties. This excludes liquid, clinical, or demolition and construction waste.
Communal waste room	This is a waste room that is shared by residents in a residential development, or staff in a retail, commercial and/or industrial development.
Compactor	A machine for compressing waste into bins.

Daily bin storage area	Dedicated area where bins are located within the property or tenancy.
Demolition and construction waste	Materials excavated from or on the site, such as: • rock and soil • waste asphalt, bricks, concrete, plasterboard, timber and vegetation • asbestos containing material, hazardous materials and contaminated soil.
Detached studio	As defined by the *State Environmental Planning Policy (Exempt and Complying Development Codes) 2008*
Domestic recycling service	The service to collect recyclable material from households.
Domestic waste	Waste generated by households.
Dual occupancy	As defined by *Blacktown Local Environmental Plan 2015*
Dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Dwelling house (single unit)	As defined by *Blacktown Local Environmental Plan 2015*
Educational establishment	As defined by *Blacktown Local Environmental Plan 2015*
Experienced waste consultant	A waste consultant with a minimum 5 years industry experience.
Garbage	Waste material other than trade or special waste, liquid waste or recyclable materials.
Group home	As defined by the *State Environmental Planning Policy (Housing) 2021*
Hotel or motel accommodation	As defined by *Blacktown Local Environmental Plan 2015*
Internal lots	Lots or dwellings that do not front a public road including lots serviced via an access handle in a battle-axe development.
Internal loop road	A road which allows waste collection vehicles to enter and exit the site in a forward direction with a maximum of 3 reverse movements. This may include straight through roads or private roads with a cul-de-sac head.
Internal waste and recycling storage	This is a cupboard, drawer or other suitable area located within each dwelling or lot for the storage of 1 days' waste and recyclables.
Interim waste room	These are waste rooms adjacent to lifts in the basement or other locations where bins are stored until they need to be moved to the main waste room.

Intractable waste	Waste that is hard to control or deal with. This includes waste that is: • flammable • infectious • corrosive.
Isolated sites	Sites which have been physically built out and can't comply with the frontage requirements for redevelopment because the adjoining sites have already been developed.
Kerbside collection point	The designated waste collection point at the edge of a formed road.
Mixed use development	As defined by *Blacktown Local Environmental Plan 2015*
Mobile garbage bin	A bin up to 1,100 litres capacity with wheels that allow it to be moved around.
Multi-dwelling housing	As defined by *Blacktown Local Environmental Plan 2015*
Ongoing waste management	Management of waste generated onsite during occupancy.
Recyclable	Capable of being reprocessed into useable material.
Reuse	Capable of being used again without being processed.
Residential flat building	As defined by *Blacktown Local Environmental Plan 2015*
Residual waste	Material that cannot be recycled.
Retail premise	As defined by *Blacktown Local Environmental Plan 2015*
Secondary dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Semi-detached dwelling	As defined by *Blacktown Local Environmental Plan 2015*
Seniors housing	As defined by *Blacktown Local Environmental Plan 2015*
Serviced apartments	As defined by *Blacktown Local Environmental Plan 2015*
Shop top housing	As defined by *Blacktown Local Environmental Plan 2015*
Site waste bins	Robust containers provided for surplus and unwanted materials onsite during construction activity.
Special waste	Clinical, intractable or hazardous waste, chemicals and other products that require special care and disposal at a specialist facility.
Truck turntable	A circular motorised platform within the ground that rotates a truck whilst parked.
Undercroft	A space under a building on columns without walls.

Waste avoidance	Action to reduce the amount of waste generated by households, commerce, industry and all levels of government.
Waste	As defined under the *Protection of the Environment Operations Act 1997*
Waste chute room	A room located on each floor of a building that houses the access point to a waste chute and a mobile recycling bin.
Waste management plan	A document that provides details on the expected volumes and types of waste to be generated onsite and how it will be stored and managed.
Waste room	A room that is located adjacent to or adjoining a loading bay where garbage and recycling bins for the site are stored awaiting reuse or collection.

2. Waste management plan

A waste management plan must accompany all development applications. The waste management plan is an important planning document that will be used throughout the development application process including the demolition and construction stages, and during occupation. It is vital that applicants and their stakeholders are aware of the requirements outlined in that document for their site.

Applications must include scaled site and floor plans that clearly identify compliance with the specific requirements as identified in the matrix at Appendix 1. Additional information to assist you in completing your waste management plan can be found in Appendix 2.

2.1 Preparing a waste management plan

A waste management plan must be prepared by an experienced waste consultant with a minimum 5 years industry experience if the development:

- is 3 storeys or more with a lift, and/or exceeds 20 units/dwellings
- includes commercial, retail and/or industrial uses with floor areas of 2,500 square metres or more.

2.2 What must it include?

The details required in a waste management plan will vary across the different stages of development.

2.2.1 Demolition and construction

The waste management plan must include the:

- measures to minimise waste and maximise reuse and recycling
- amount and type of waste and recyclables to be generated
- proposed storage and treatment of waste and recyclables
- proposed purchasing policies that will assist with sustainable development
- opportunities to close the loop and support a circular economy

2.2.2 Occupancy

The waste management plan must include the:

- type of development
- number of units, dwellings or tenancies
- waste and recycling generation rates for the proposed use(s)
- number of bins required for the development
- bin capacities
- collection frequencies
- proposed method of bin movement around the site
- method to rotate recycling bins on each residential floor where chutes are proposed
- proposed service provider
- location of waste collection point(s)
- location of the loading bay for the site (if required)
- proposed physical treatment of the loading bay to maintain truck turning areas (eg, removable, lockable bollards)
- provision of bulky waste storage area(s), their size and location
- information on the bin tug and trolley equipment for the site (if required)
- specification sheets for all waste management equipment proposed for the site
- cleaning and maintenance schedules for all required waste equipment
- method of communication about the waste system to residents and/or tenancies
- building manager's responsibility to coordinate the waste arrangement for the site if communal bins are required. This includes but is not limited to ensuring clear access onsite for collection vehicles, granting access to loading bays, maintaining waste related signage, moving bins for collection, managing illegal dumping, and cleaning bins and waste facilities onsite
- waste management responsibilities if the development will be strata titled. The expectations and responsibilities of residents and/or tenants in the development must also be outlined in the Community Management Statement, Total Maintenance Plan and/or Strata By-Laws (whichever applies to the site)
- proposed management of shopping trolleys for commercial and mixed use developments in accordance with Council's Abandoned Shopping Trolley Policy P000497.1
- compliance measures with NSW Government regulations for activities generating hazardous, intractable or clinical waste.

2.3 Generation rates

The number of bins for your development will be dictated by the generation rates listed below.

2.3.1 Residential

a) individual bins

- allow for provision of the following bins:
    - 240 litres/week/dwelling for waste
    - 240 litres/week/dwelling for recycling

b) boarding houses where kerbside collection is permitted

- 'new generation' style with individual kitchens:
    - 110 litres/week/unit for waste (to be collected in 240 litre bins)
    - 90 litres/week/unit for recycling (to be collected in 240 litre bins)

- 'traditional' style with communal kitchen:
    - 35 litres/100 square metres floor area/day for waste (to be collected in 240 litre bins)
    - 15 litres/100 square metres floor area/day for recycling (to be collected in 240 litre bins)

c) boarding houses where onsite collection is required

- 'new generation' style with own kitchens and bathrooms:
    - 110 litres/week/unit for waste (to be collected in 1100 litre bins)
    - 90 litres/week/unit for recycling (to be collected in 240 litre bins)

- 'traditional' style with communal kitchen:
    - 35 litres/100 square metres floor area/day for waste (to be collected in 1100 litre bins)
    - 15 litres/100 square metres floor area/day for recycling (to be collected in 240 litre bins)

d) communal residential bins (other than boarding houses)

- allow for the following waste and recycling generation rates:
    - 240 litres/week/unit for waste
    - 80 litres/week/unit for recycling

2.3.2 Commercial and retail

The waste and recycling generation rates for various retail and commercial operations, as outlined in the EPA *Better Practice Guide for Resource Recovery in Residential Developments 2019*.

If the retail or commercial tenancies are not known at the development application stage, the rates for the largest waste and recycling generator permitted in the zoning of the proposed development, must be applied.

2.3.3 Industrial

The number of bins for your development will be dictated by the generation rates listed below. If the proposed use is not listed, your waste management plan must provide a case study to determine a suitable waste generation rate.

a) factories

- 40 litres per 100 square metres per day for waste
- 20 litres per 100 square metres per day for recycling

b) showrooms

- 40 litres per 100 square metres per day for waste
- 10 litres per 100 square metres per day for recycling

c) warehouses

- 30 litres per 100 square metres per day for waste
- 30 litres per 100 square metres per day for recycling

2.4 Collection frequencies

Collection frequencies vary between service providers and development types and sizes as outlined below.

2.4.1 Residential developments (individual 240 litre bins)

- waste collected once a week
- recycling collected fortnightly

2.4.2 Residential developments (communal bins)

- waste collected up to 3 times a week
- recycling collected weekly

2.4.3 Retail, commercial and industrial developments

- waste collected up to 5 times a week
- recycling collected up to 5 times a week

Waste rooms in retail, commercial and/or industrial developments proposing collections 5 days a week for waste and recyclables, must be designed to accommodate 3 days' worth of waste and recyclables to allow for public holidays and long weekends.

2.5 Compaction rates

Compaction of waste will assist larger developments in reducing the required number of bins. Compaction is not permitted for recycling. Compaction rates vary between residential, retail, commercial and industrial developments as outlined below.

2.5.1 Residential (communal bins)

- 1:2 is the maximum compaction rate permitted for waste only

2.5.2 Retail, commercial and industrial

- 1:5 is the maximum compaction rate permitted for waste only

2.6 Waste equipment

Any waste management equipment proposed for the site, including chutes, bin tugs, compactors, bin lifters etc., must be selected in consultation with a reputable waste equipment provider.

2.7 Waste systems and technologies

Where appropriate and suitably demonstrated, Council may consider alternative waste systems, processes and technologies. This may include composting, digesters, bin lifts, dedicated problem waste collection points and more. At a minimum, suitability must demonstrate that the proposal

benefits the residents and supports best practice for caretakers and operational staff. This would ensure that the proposed alternative is more practical and effective for onsite waste management.

2.8 Waste management platforms and tools

To support waste avoidance, diversion and recovery, commercial developments are encouraged to use recognised and accredited waste management tools. Organisations such as National Australian Built Environment Rating System (NABERS) provide online tools to record and monitor waste. This is to ensure various waste streams are accounted for and can be sustainably managed.

Suitable space for bin separation and bin weighing station(s) must be considered in the early design stage to ensure multiple waste streams generated onsite are recovered for reuse, recycling or disposal. In addition to waste and co-mingled recycling, streams may include but are not limited to, food organics, soft plastics, pallets, electronic waste, bulk cardboard, textiles, clinical waste etc.

2.9 Council's Abandoned Shopping Trolley Policy

Any development which requires and/or proposes shopping trolleys, including supermarkets and shopping centers, must comply with Council's Abandoned Shopping Trolley Policy (P000497.1). The Policy outlines the requirement for an onsite containment system to ensure trolleys are not littered and illegally dumped (see Photo 1 and 2). It is preferred that trolleys are fitted with a wheel lock system to prevent them being moved off the premises. The policy supports improved street character and community pride. Without a containment system, trolleys:

- become littered along roads and obstruct paths
- attract illegal dumping and anti-social behaviour
- increase risk of injury and damage to property
- pollute bushland and waterways.



Photo 1: Abandoned shopping trolleys used for illegal dumping along the kerbside



Photo 2: Abandoned shopping trolleys polluting waterways

3. Subdivision and engineering works

This section applies to waste collection requirements for the design of new subdivisions and roads.

3.1 Laneways, internal loop roads and/or private roads

In addition to the controls listed in *Part G Waste management and minimisation* in the Blacktown DCP 2015, where developments include laneways, internal loop roads and/or private roads with waste collection, the development must demonstrate:

- bin collection from on one side of the laneway, loop road or private road only (see Photo 3)
- bin collection from identified bin collection point(s) only (see Photo 4 and 5)
- design of laneways, loop roads and/or private roads has a minimum 6 metre carriageway, a 1 metre verge on either side and garages setback a minimum 0.5 metres on each side with 'no stopping' signage along its entire length (see Photo 6)



Photo 3: Collection from one side of the laneway, loop road and/or private road only



Photo 4: Designated bin collection points with unit numbers indicated

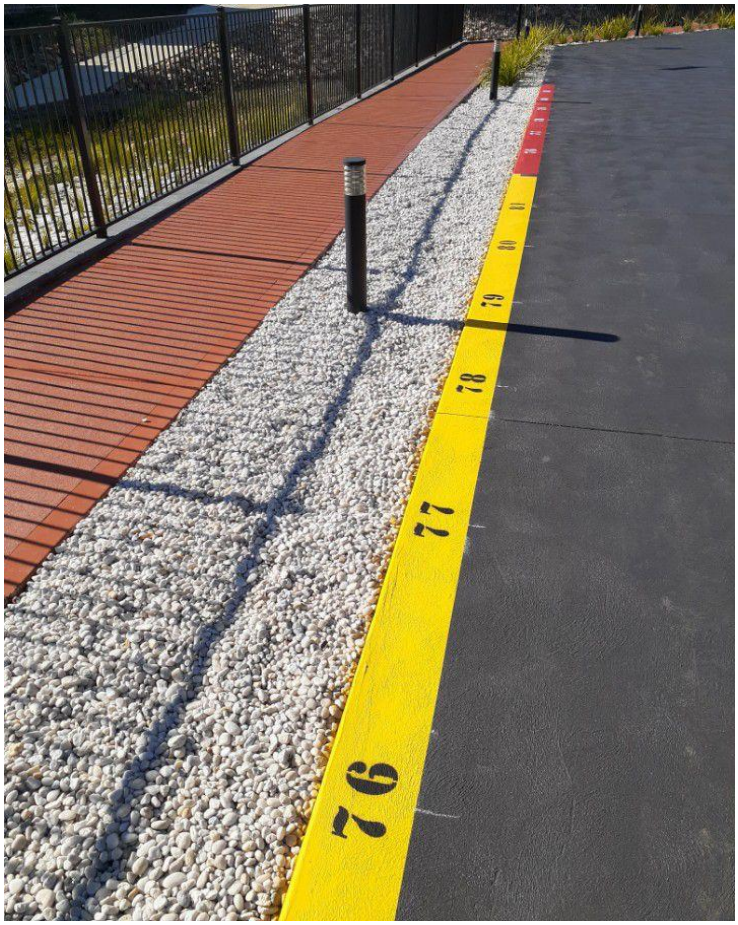


Photo 5: Designated bin collection points with unit numbers indicated



Photo 6: Laneway, loop road and/or private road design and 'no stopping' signage

4. Checklists

Checklists in Appendix 4 have been developed for demolition, construction, residential, mixed use and commercial and industrial developments. As part of your waste management plan, the relevant checklist must be completed. For waste management plans prepared by an experienced waste consultant, the checklist should be included as an appendix to your submission.

4.1 Demolition

The demolition checklist located in the waste management plan template (Appendix 4) will assist in preparing a waste management plan with demolition activity. Table 1 provides some options for reuse and recycling of building material.

Table 1: Opportunities to reuse and recycle building materials

Waste material	Reuse and recycling opportunities
Concrete	reused for filling, levelling or road base
Bricks and pavers	cleaned for reuse, rendered over or crushed for landscaping or driveways
Roof tiles	cleaned and reused in landscaping or driveways
Untreated timber	reused as floorboards, fencing, furniture, mulched or sent to second-hand timber suppliers
Treated timber	reused as formwork, bridging, blocking and propping or sent to second-hand timber suppliers
Doors, windows, fittings	sent to second-hand timber suppliers
Glass	reused as glazing or aggregate for concrete production
Metals	removed for recycling
Synthetic rubber	reprocessed for reuse in safety devices and speed humps
Significant trees	relocated either on or off-site
Garden waste	mulched or composted
Plasterboard	removed for recycling or returned to the supplier

4.2 Construction

The demolition checklist located in the waste management plan template (Appendix 4) will assist in preparing a waste management plan with construction activity. Table 2 contains some ideas on how to reduce waste through the demolition and construction stages of development.

Table 2: Ways to reduce waste through the demolition and construction stages

Stage	Ways to reduce waste
Initial planning	• identify and communicate roles with all stakeholders to gain relevant information • identify how you can maximise retaining materials for reuse • identify all waste streams and estimate volumes • set waste reduction targets • research sustainable building material alternatives • research disposal costs.
Design	• design using standard material sizes • implement a purchasing policy.
Off-site activities	• use prefabricated materials • choose suppliers who will take back excess stock and resources • inform stakeholders of the waste management plan requirements • communicate with sub-contractors • implement a delivery plan for the project.
Onsite activities	• secure the site to reduce illegal dumping • identify storage requirements • select resources and materials with less packaging • separate, reuse and recycle • ensure bins and storage areas are clearly labelled with adequate signage • communicate with all staff and contractors, hold toolbox talks • establish a monitoring system during onsite construction activity • undertake safe and lawful disposal of unavoidable waste • keep necessary documentation regarding material recycling and disposal at licenced waste facilities.

5. Daily bin storage

Refer to the matrix at Appendix 1 for the relevant development controls that apply to your development typology. This section provides information to ensure that the waste system and design are appropriate.

5.1 Individual bins

Daily bin storage areas for individual dwellings must:

- be located behind the front building line of the dwelling
- allow residents to easily carry bagged waste to the bin from their dwelling
- allow bins to be moved safely for collection, but not through interior living areas
- not impact the amenity of neighbouring and adjoining dwellings
- not be visible from other dwellings
- ensure that if the bin exit point in a property backs onto visitor car spaces, a minimum 1 metre of additional car park hardstand area (on the side where bins are to be moved), must be provided to allow safe exit and movement of bins on collection day.

Figure 1 shows a suitable daily bin storage area for single dwellings. The daily bin storage area is screened and located behind the building line and external to the garage. There is sufficient kerbside frontage for bin placement and servicing. The bin travel path is sealed and complies with maximum bin travel distances.

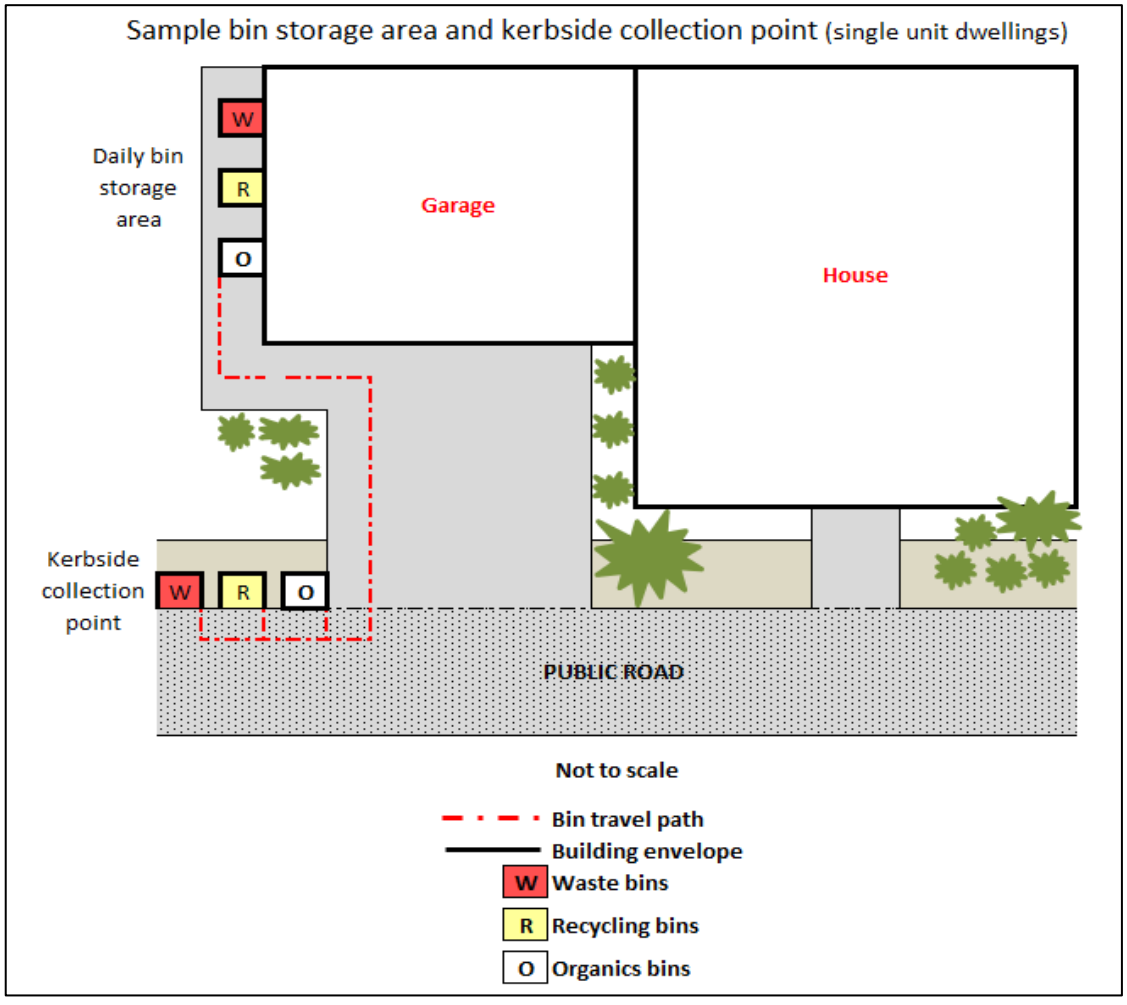


Figure 1: Waste storage area for a single dwelling with kerbside collection

Figure 2 shows a sample multi-dwelling housing development with 7 units where kerbside collection is permitted. Bins are stored in each lot external to the garages.

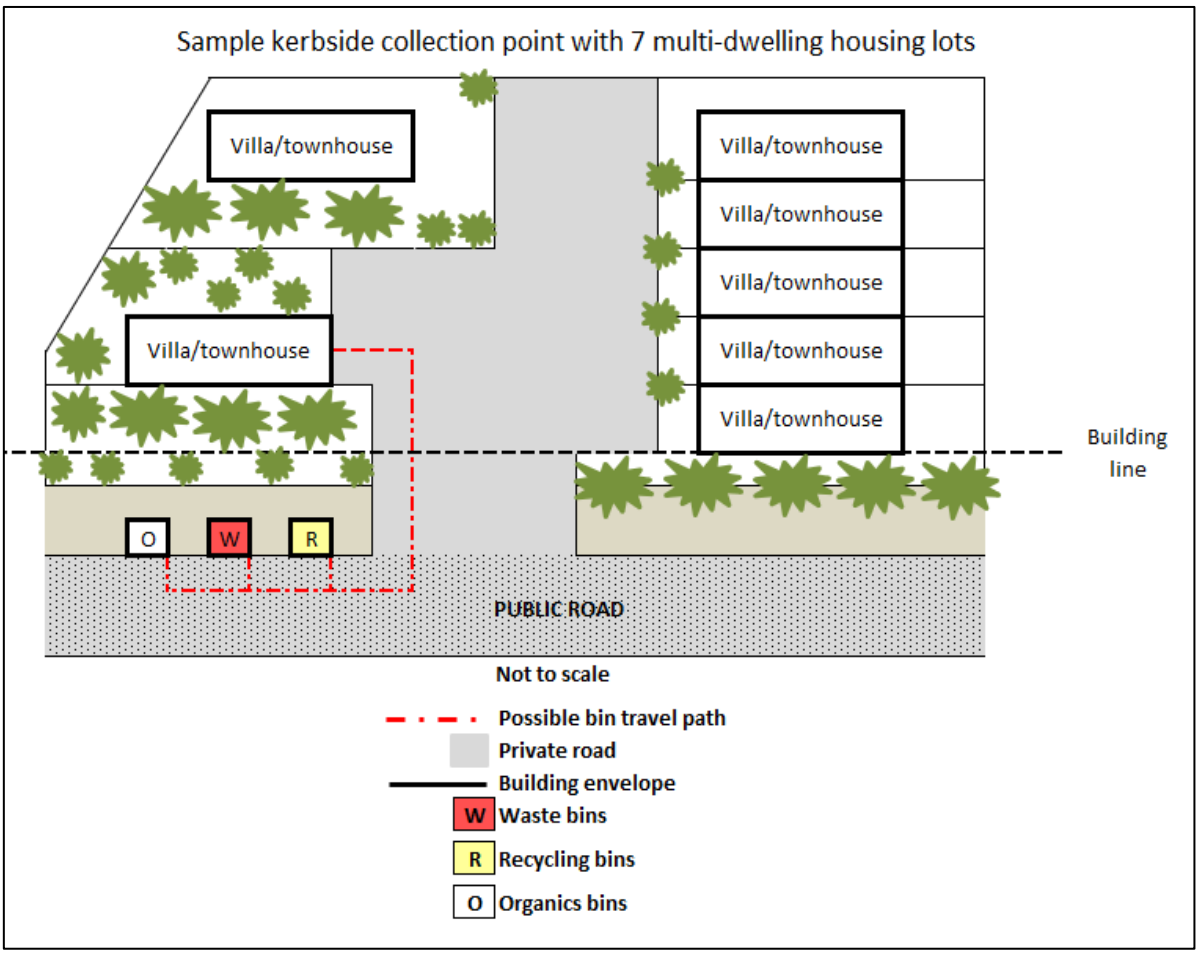


Figure 2: Kerbside collection point with 7 multi-dwelling housing lots

5.2 Communal bins

Communal waste rooms are required for any development with shared bins. This may include some multi-dwelling housing and senior living developments. For mixed use developments, the commercial and residential waste rooms must be separated. Table 3 provides additional information on design considerations.

Clear signage must be installed in any communal waste room to indicate appropriate use of the bins and the waste room. This signage must be maintained in perpetuity by the strata management company, Body Corporate or other relevant management body.

5.2.1 Communal waste room design

Photo 7 shows a waste room with adequate space for rotation and storage of bins. There is also storage space for several other waste streams generated onsite.

Communal waste rooms must be:

- big enough to accommodate all required waste and recycling bins for the site
- adequate in size to store any required waste equipment in addition to all the bins
- completely separated for the residential component of mixed use developments
- large enough to allow bins to be placed in single file with circulation space in between as bins must not be stacked

- regularly maintained for cleanliness of bins and surfaces
- screened from view (if at ground level) by a visual barrier of at least 1.5 metres high or to match the fence of the surrounding properties
- screened to avoid line of sight views from living room windows and balconies within the development.



Photo 7: A communal waste room with enough space for bin storage and rotation

Figure 3 shows a sample waste room layout for a multi-dwelling housing development where communal bins are required and/or proposed. A 1.5 metre wide doorway is shown as it assists with movement of bins. Different waste streams are clearly separated to promote recycling. The drain is connected to the sewer.

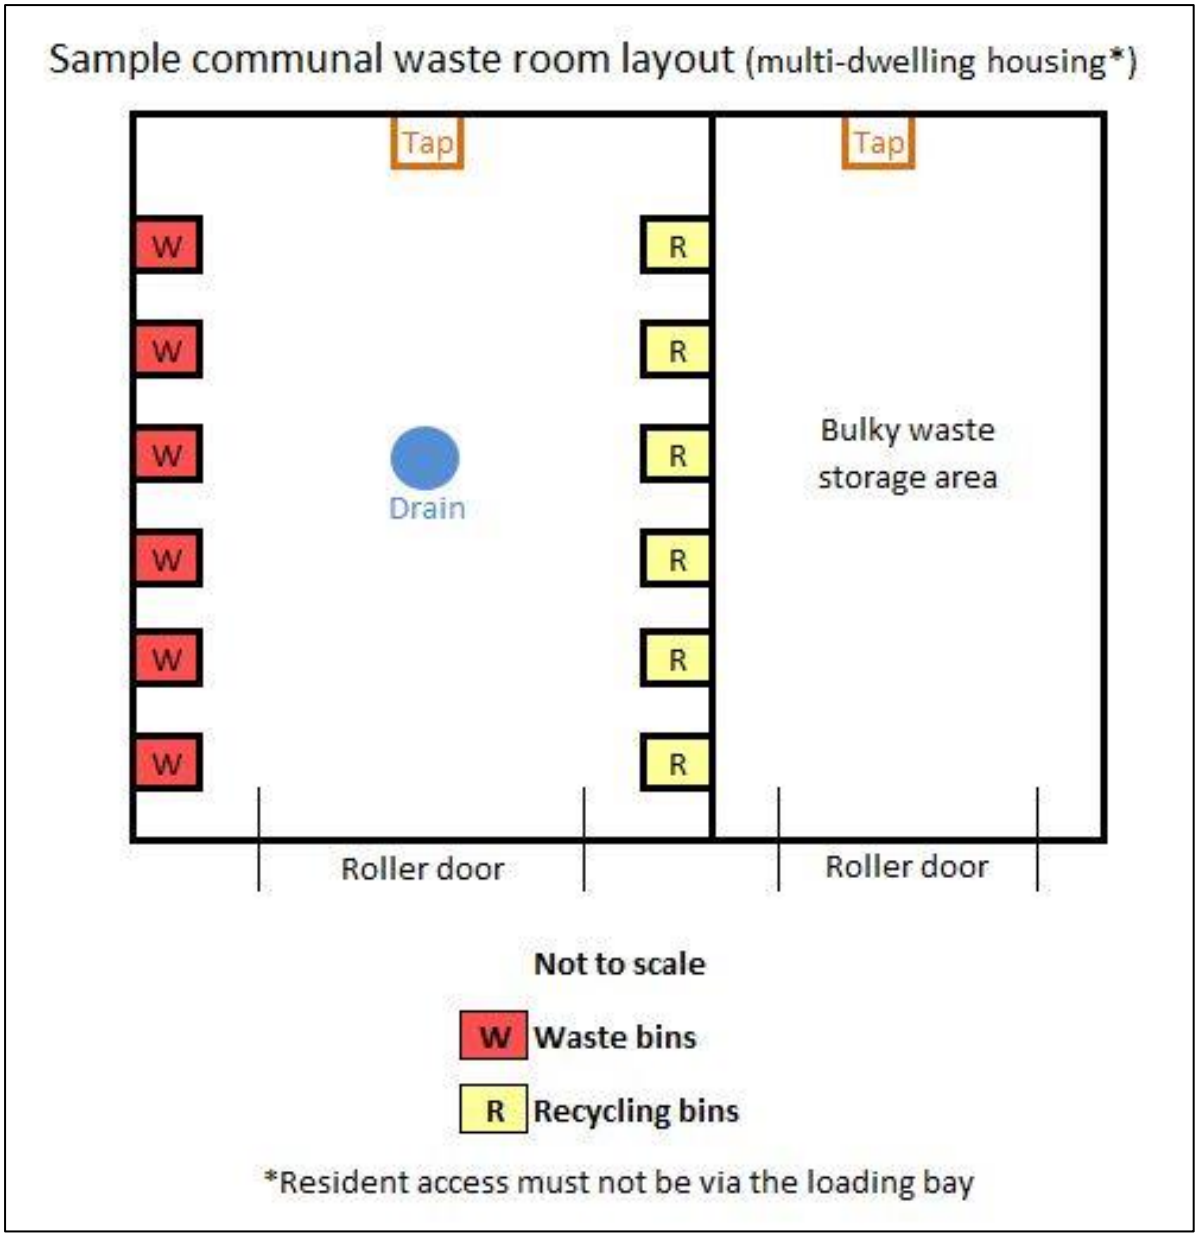


Figure 3: Communal waste room layout (multi-dwelling housing)

Figure 4 shows a sample communal waste room layout for a residential flat building or residential developments with shared bins. Bulky waste storage has been provided adjacent to the communal waste room and 1.5 metre wide doorways have been installed to assist with movement of bins and bulky waste. Waste streams are separated to promote recycling. The drain is connected to the sewer.

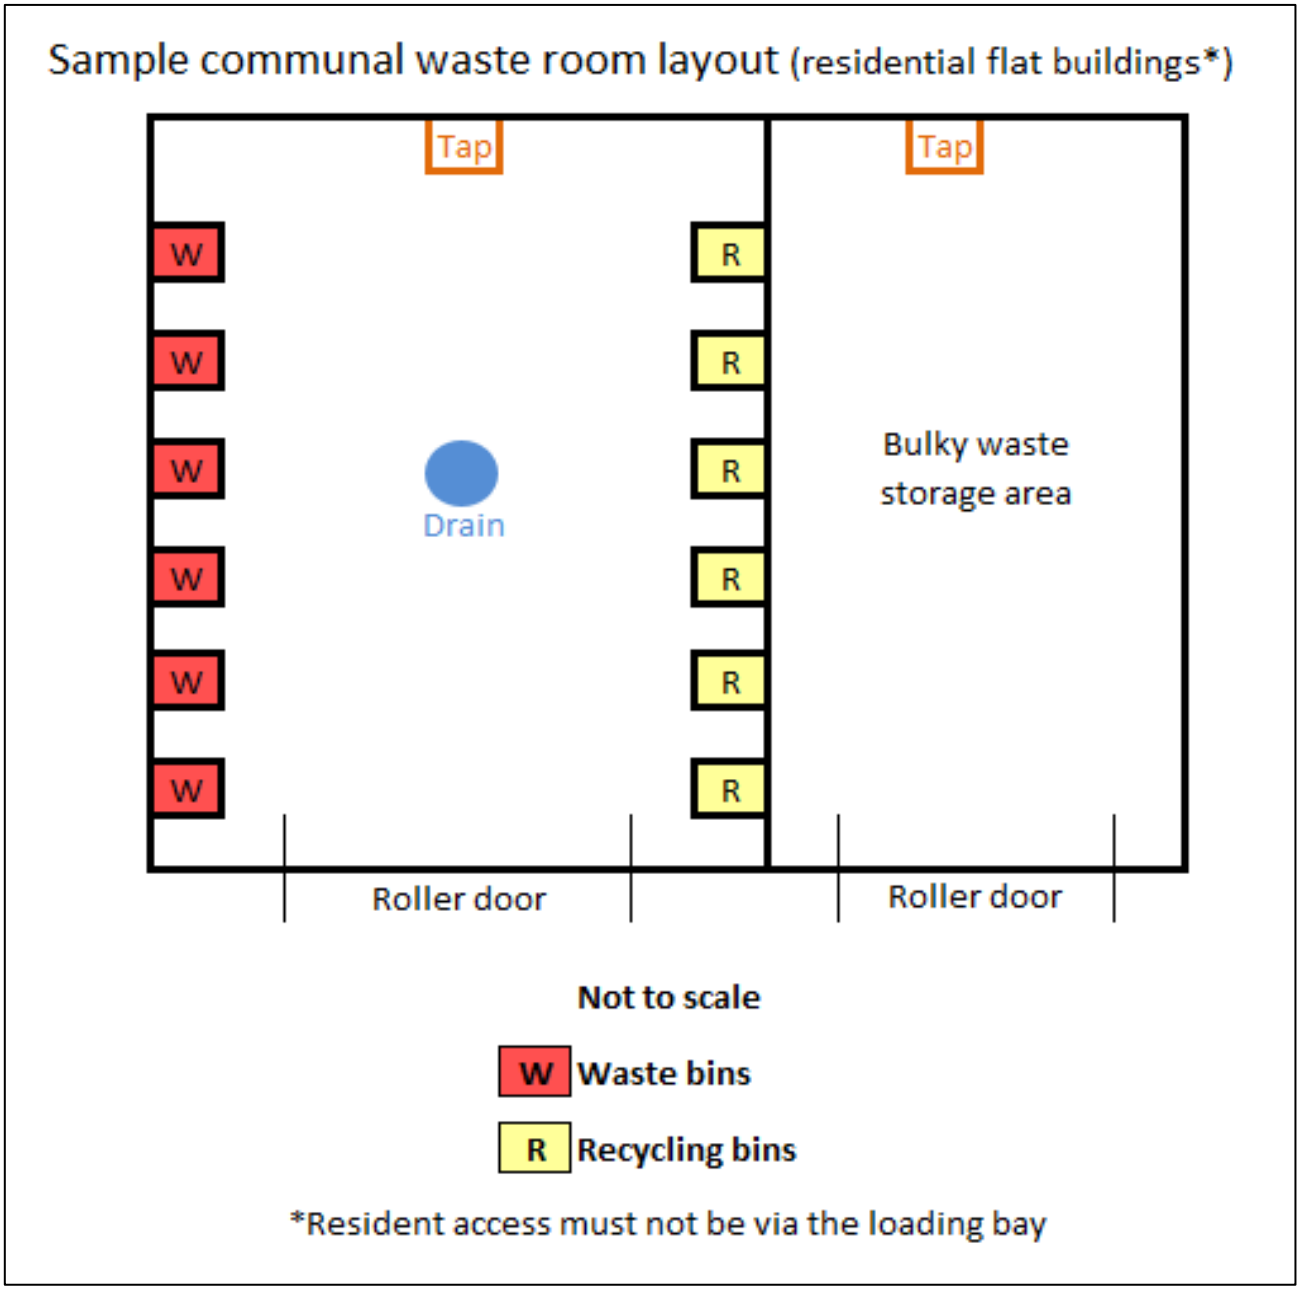


Figure 4: Communal waste room layout (residential flat building)

5.2.2 Communal waste room location

Communal waste rooms must be located to:

- provide equal, convenient and safe access a maximum distance of 30 metres to all residents and any retail, commercial and/or industrial tenants. If this distance is exceeded, interim waste rooms will be needed where the bins are temporarily stored prior to being moved to the main waste room(s) for collection. These bins will need to be rotated by a caretaker or building manager as required.
- ensure efficient movement of bins to the collection point
- not impact the amenity of neighbouring and adjoining residential lots

- be away from habitable rooms of lots within or adjoining the site
- reduce noise nuisance from waste equipment, bin movement and/or bin collection
- eliminate potential nuisance from odour
- be ventilated, suitably lit and secure
- reduce the potential for vandalism and/or illegal dumping.

Figure 5 shows a sample communal waste room for a multi-dwelling housing development with 8 lots and shared bins. The location of the communal waste storage room is behind the building line and designed to complement the rest of the development. The figure indicates an onsite collection point for the development.

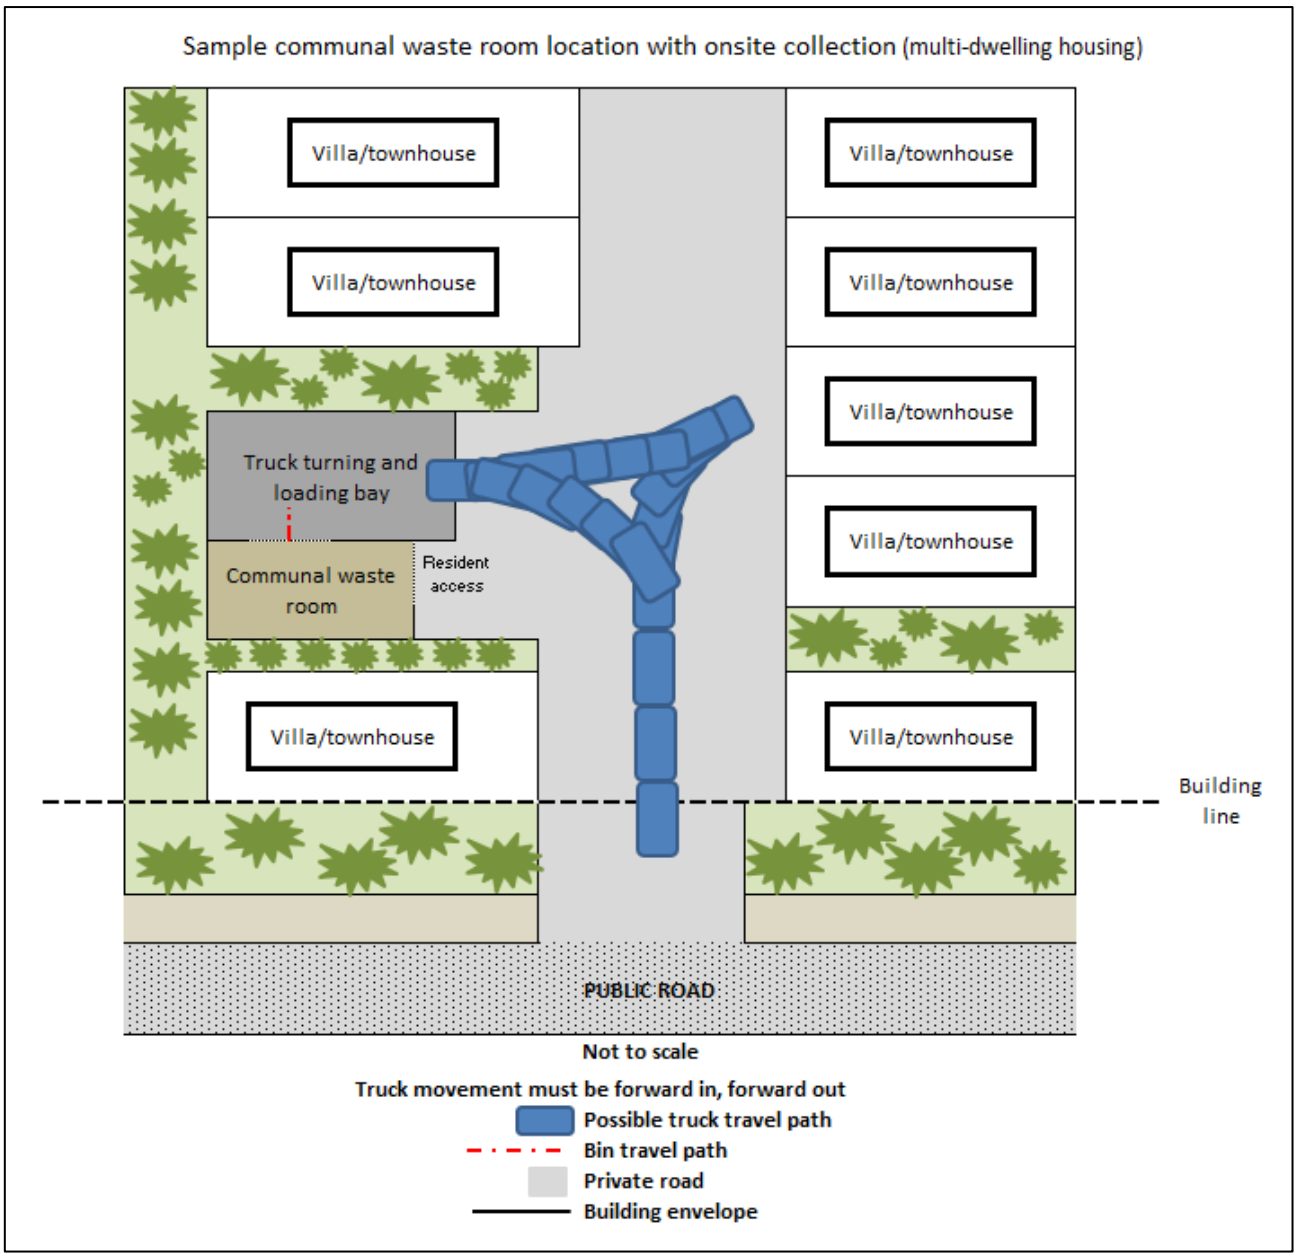


Figure 5: Waste room location with onsite collection (multi-dwelling housing)

Figure 6 shows a sample communal waste room location with onsite collection at ground level for a residential flat building or residential developments with shared bins on a site under 1500 square metres. Collection is to the rear of the site and behind the building line. A 3 metre clearance to the rear of the truck is provided for bin servicing and rotation.

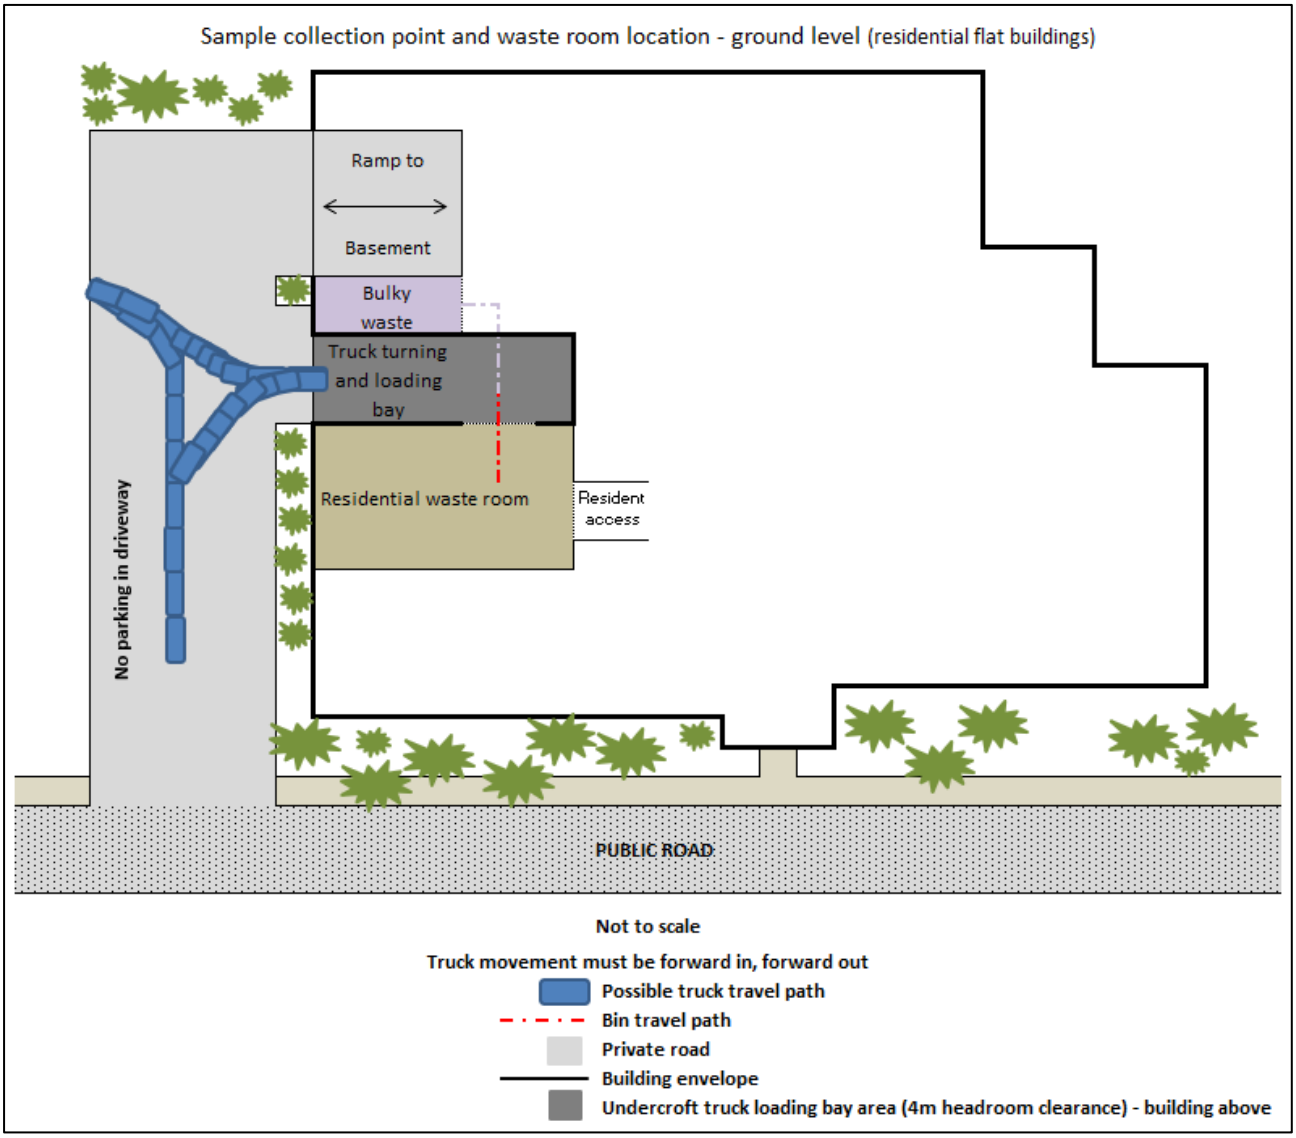


Figure 6: Collection point and waste room location - ground level (residential flat buildings)

Figure 7 shows a sample communal waste room location with onsite collection from the basement for a residential flat building or residential developments with shared bins on a site measuring 1500 square metres or more. Development applications must demonstrate the route of travel for the collection vehicle and required manoeuvring.

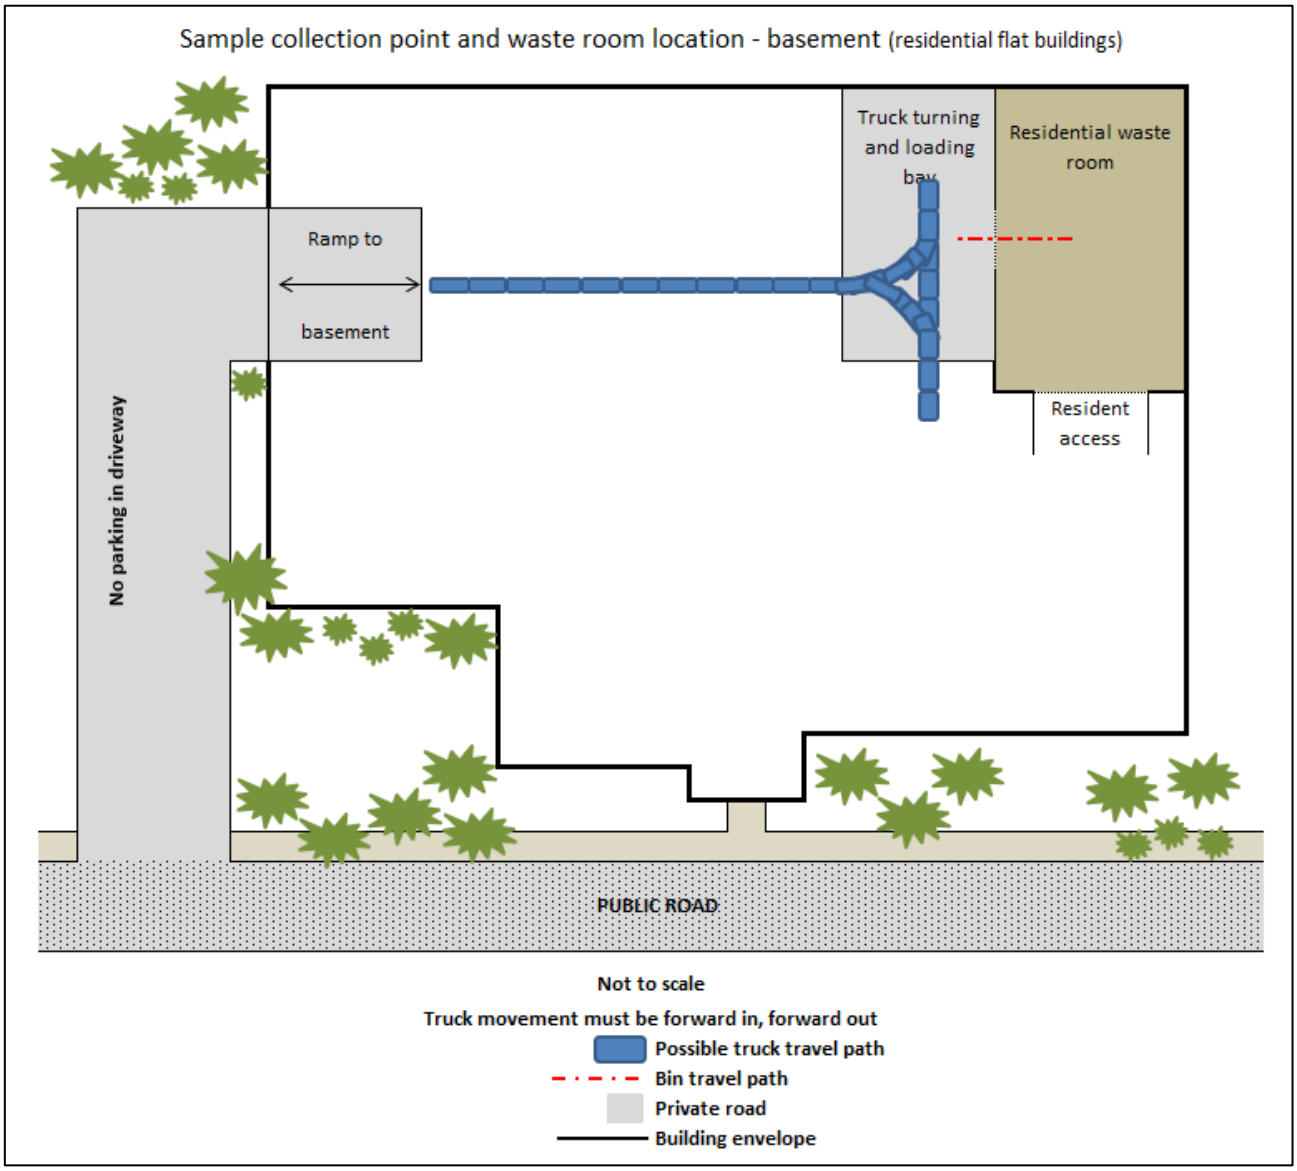


Figure 7: Collection point and waste room location - basement (residential flat building)

Figure 8 shows a sample residential flat building or development where multiple communal waste rooms have been provided. It shows basement collection with the communal waste rooms coming straight off a designated loading bay.

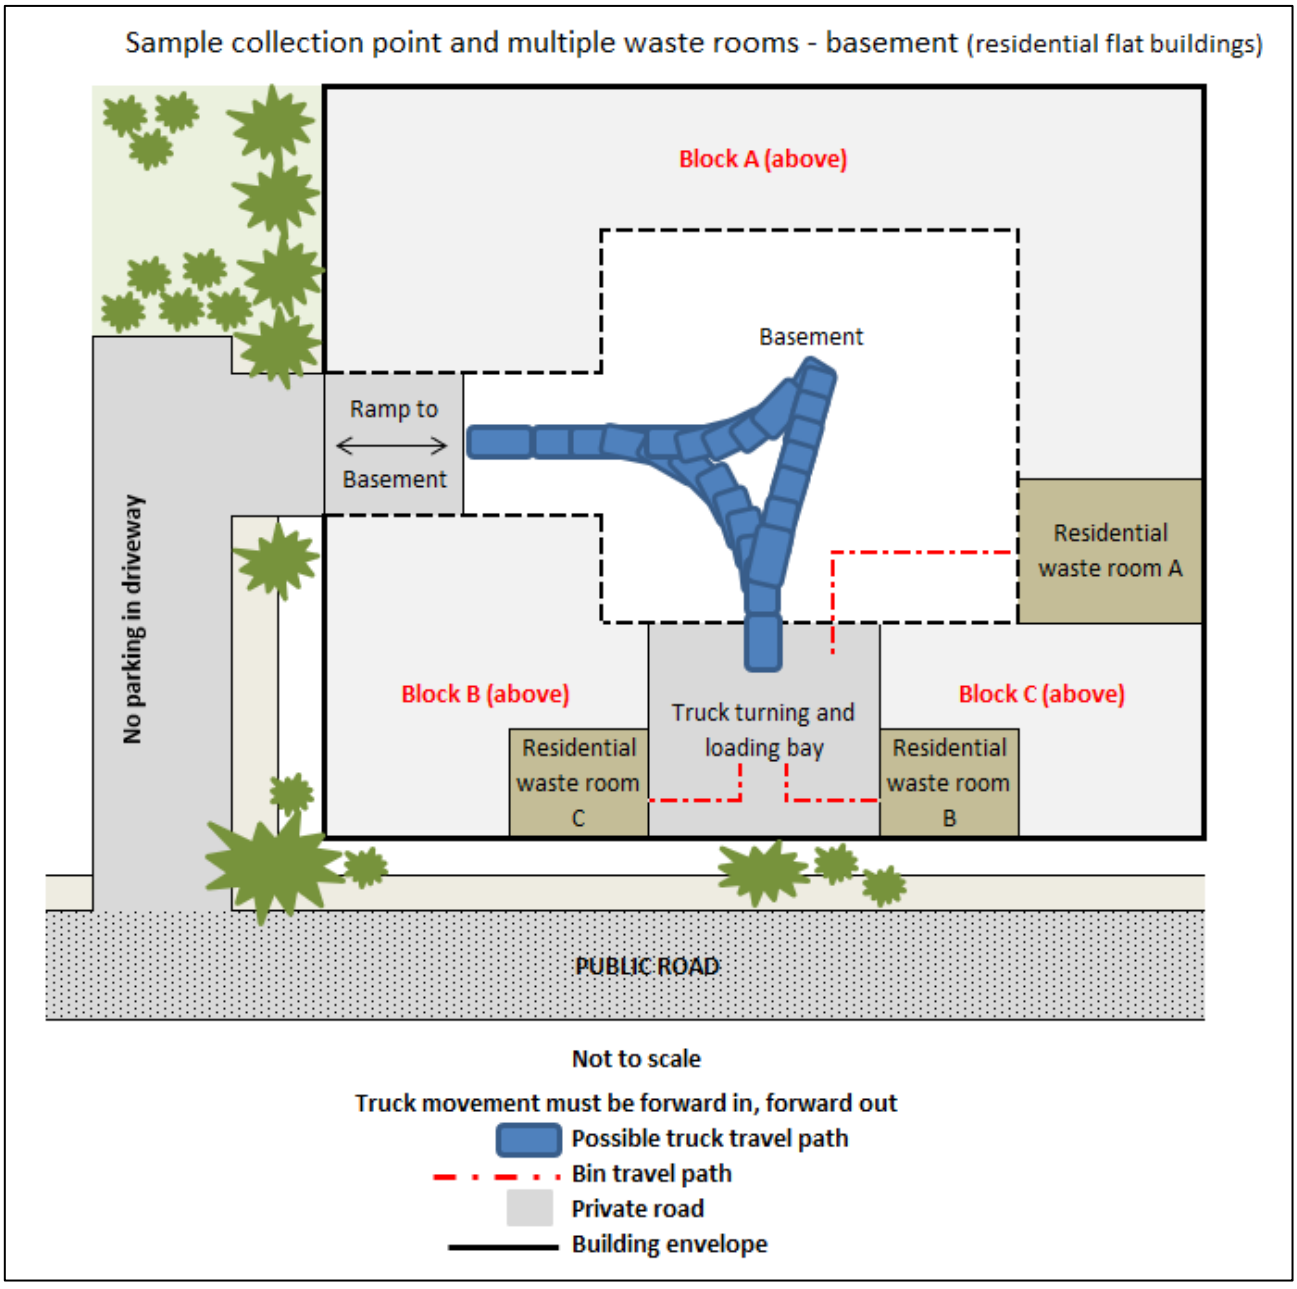


Figure 8: Collection point and multiple waste rooms - basement (residential flat building)

Figure 9 shows a possible collection point at ground level for a smaller mixed use development on a site measuring under 1500 square metres. The residential and commercial/retail waste rooms are clearly separated. It indicates adequate waste vehicle access, route of travel and manoeuvring. The loading bay is to the rear of the site and behind the building line.

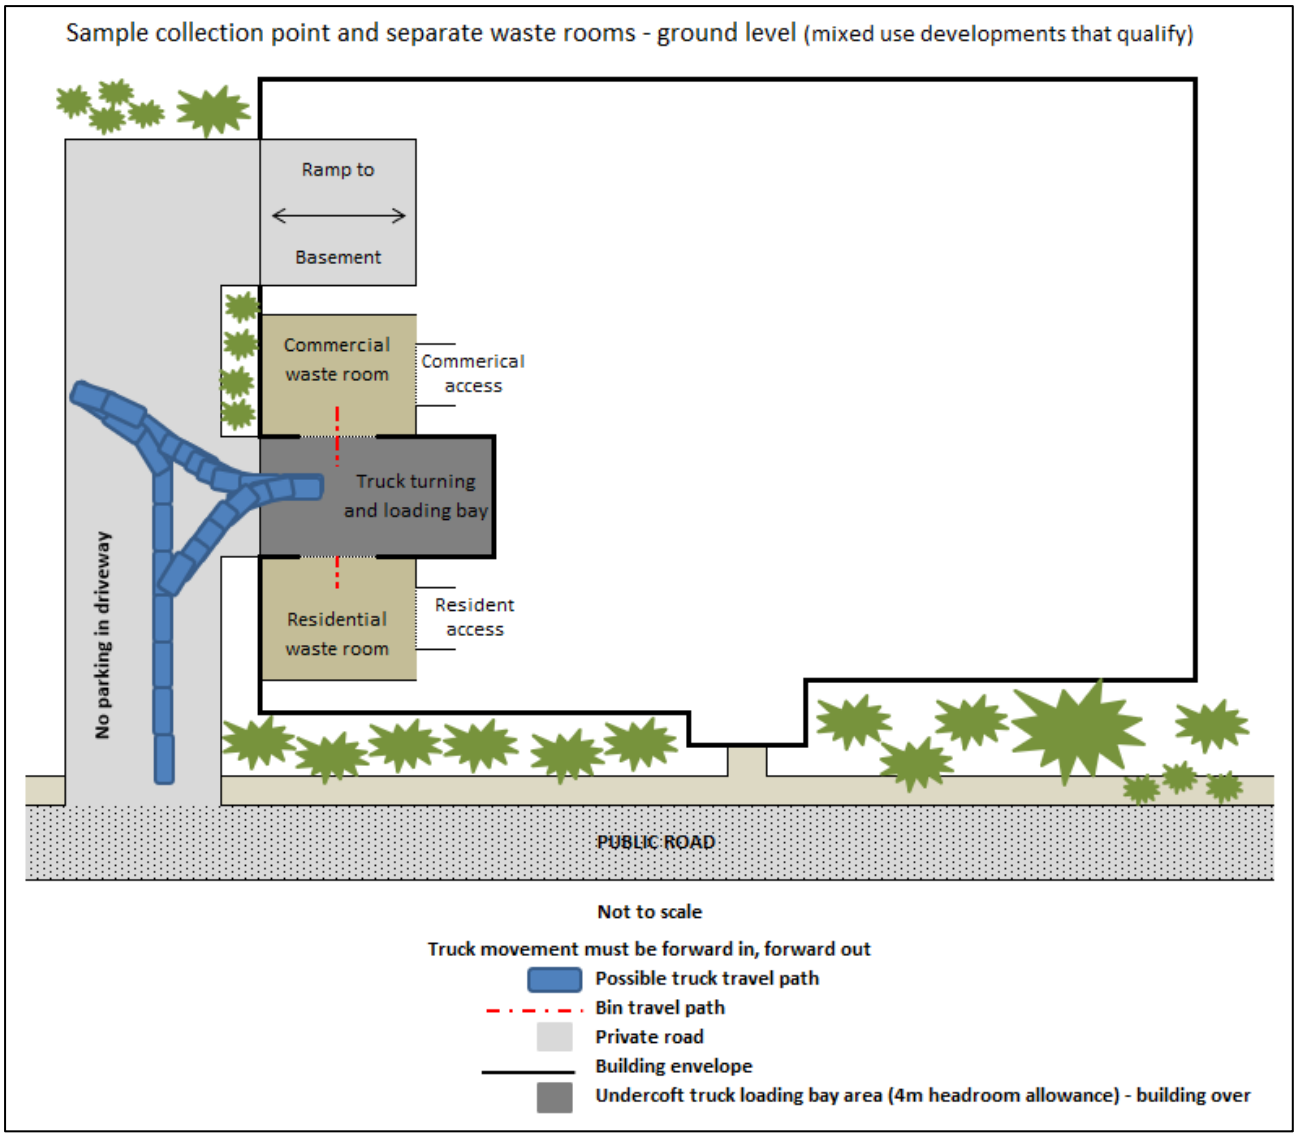


Figure 9: Collection point and separate waste rooms - ground level (mixed use developments)

Figure 10 shows a possible collection point in the basement for a larger mixed use development on a site measuring over 1500 square metres. The residential and commercial/retail waste rooms are clearly separated. It indicates adequate waste vehicle access, route of travel and manoeuvring.

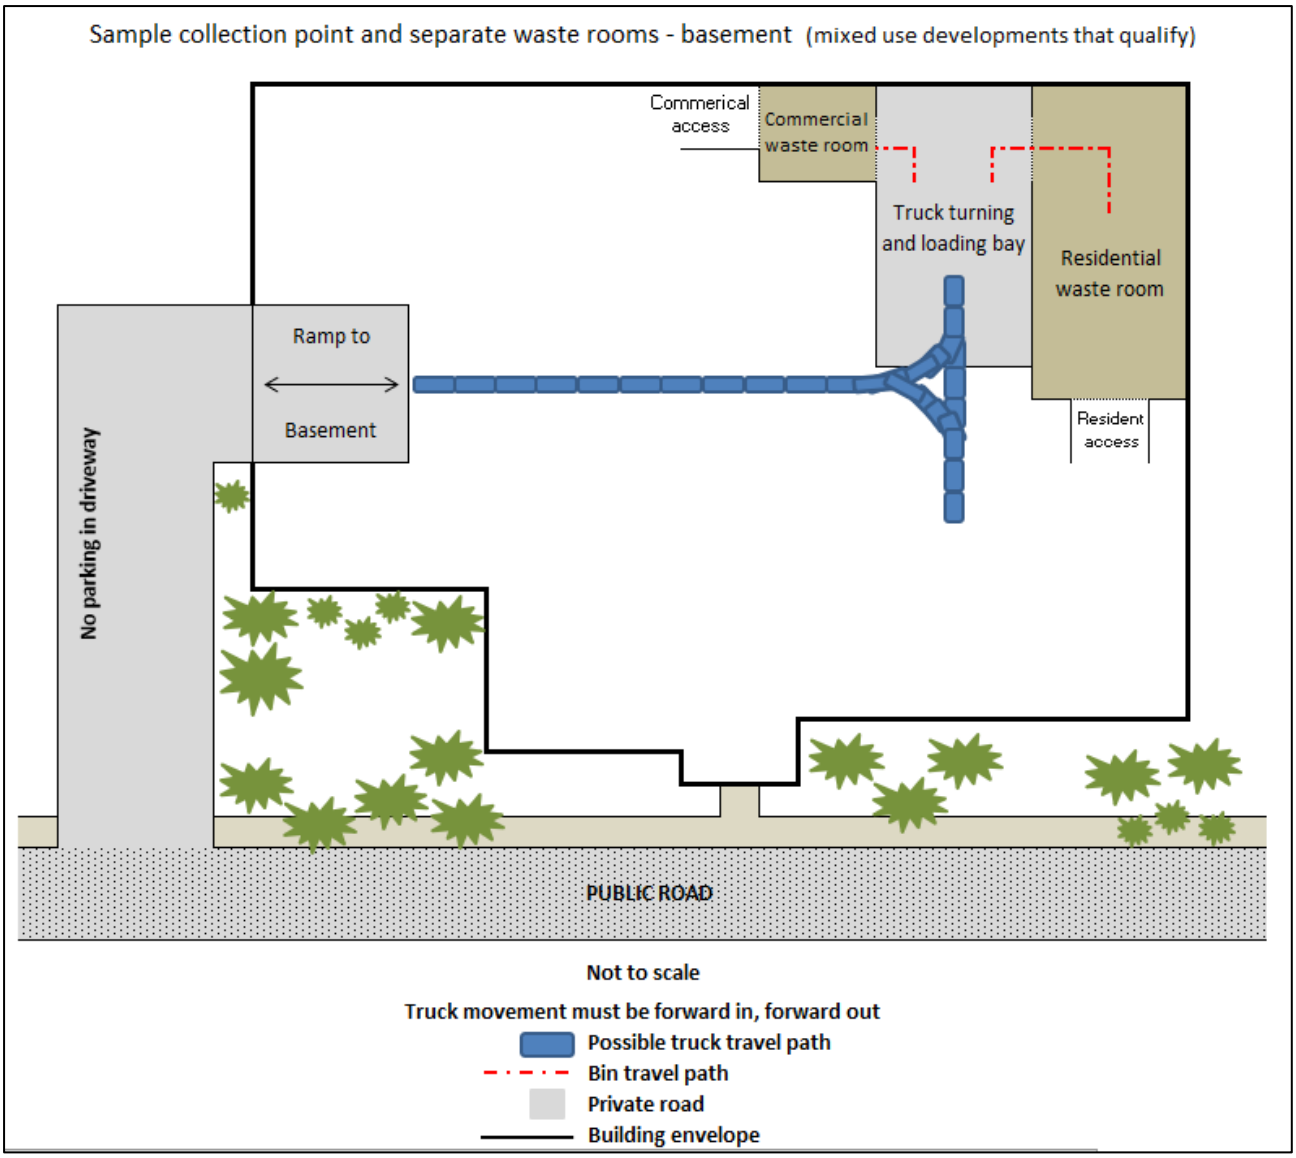


Figure 10: Collection point and separate waste rooms - basement (mixed use developments)

5.2.3 Communal waste room construction

Communal waste rooms must be constructed to the following specifications:

- floors are constructed of concrete at least 75 millimetres thick
- floors are graded and drained to a Sydney Water approved drainage fitting
- floors are finished in a smooth, even surface
- walls are built of solid impervious material
- ceilings are finished with a smooth faced, non-absorbent material capable of being cleaned
- walls, ceilings and floors are finished in a light colour
- the room is provided with an adequate supply of hot and cold water mixed through a centralised mixing valve with hose attachment
- doors are self-closing and able to be opened from inside the room
- the room is constructed to prevent the entry of vermin
- the room has adequate light and ventilation
- lighting is controlled using switches located both inside and outside the room

Table 3 contains more information on the specifications of waste room construction.

Table 3: Design considerations for communal waste rooms

Factors	Considerations
Functional and suitable	• waste room size • regular and practical shape • separating waste streams • layout of waste room.
Safe, convenient and accessible	• travel path for residents • lighting • fire safety requirements.
Reduce environmental nuisances	• noise reduction measures • ventilation • clean up and wash down facilities • suitable flooring and wall finishes • floor grading and drainage.
Avoiding impacts on other residents and adjoining properties	• details of closest habitable doors and windows • security • lighting.

5.2.4 Communal waste rooms – industrial uses and food retail

In addition to Section 5.2.1, 5.2.2 and 5.2.3, these developments must also provide:

- a bunded and graded storage area for liquid waste so that it can be drained to a grease trap to satisfy Sydney Water requirements
- additional space in the waste rooms to accommodate reusable items like pallets and crates.

5.2.5 Non-residential development

Commercial, retail and industrial spaces generate different types of waste. The waste generation rates listed in Section 2.3 will ensure that you select an appropriate waste system with a functional and effective design for future, ongoing use of the site.

You must consider all potential waste streams your development may generate and select appropriate waste equipment to store it. A variety of equipment is available for commercial developments. You must consider collection frequencies, monitoring programs and ongoing maintenance. Table 4 shows a poorly designed communal waste room where incorrect and/or inadequate waste and recycling generation rates have been applied leading to over flowing bins and obstruction when entering the waste room. This is a problem for residents and building occupants, site management and collection contractors.

Mobile garbage bins are moulded containers with two wheels and a close-fitting lid; often transported manually. They can range in size from 80 litre to 360 litre bins (see Table 5 adapted from Mastec). Other waste management equipment is available (see Table 6 adapted from Mastec) including bulk bins (front and rear lift), skips, tipper bins, balers and compactors. Consideration must be given to the size and servicing requirements for this equipment and whether they are suitable for the proposed site.

Manufacturers and waste contractors must be consulted to confirm sizes and dimensions of waste bins and access requirements. Further details are provided in the EPA *Better practice guide for resource recovery in residential developments 2019.*

Table 4: The result of a poorly designed and planned waste room

What is the problem?	
• designed with incorrect waste generation rates • no access path to all bins • no source separation of waste • no recycling provisions • no signage provided • bins stored in stacked formation leading to overflowing front bins, empty rear bins, increased dumping and safety risk, and reduced amenity • increased cost with waste collection contractors for removal.	

Table 5: Typical wheelie bin dimensions

Bin capacity	80 litre	120 litre	140 litre	240 litre	360 litre
Height (millimetres)	796	940	927	1072	1116
Depth (millimetres)	561	561	616	740	904
Width (millimetres)	481	481	538	582	669
Approximate footprint (square millimetres)	0.24	0.27	0.33	0.43	0.60

Table 6: Typical bulk bin dimensions

Bin capacity	660 litre	1100 litre
Height (millimetres)	1277	1310
Depth (millimetres)	775	1088
Width (millimetres)	1216	1196
Approximate footprint (square millimetres)	0.94	1.30

6. Bulky waste

6.1 Individual residential bins - private roads

The communal bulky waste collection point(s) must be:

- sign posted for ‘no stopping’ at any time
- located onsite and accessible to Council’s side lift vehicles
- located on a straight stretch of road
- located so the travel distance for residents to transport unwanted bulky waste items from their dwelling to the bulky waste collection point is not excessive
- managed by the elected strata management company including compliance with our requirements for collection of bulky waste and the use of this communal collection point onsite.

Figure 11 shows a sample multi-dwelling housing development with communal bin pads and communal bulky waste collection points. The bulky waste storage and collection points are property signposted and line marked and contained within the development site. Bin collections are from one side of the road with road design suitable to accommodate Council’s side lift, left hand lift waste and recycling collection vehicles. For multi-dwelling housing developments with 8 or more lots, dwellings fronting a public road will place bins on their frontage for collection. All internal lots fronting private or community title roads will present their bins for collection on private property along communal bin pads located around the site. Adequate internal loop roads have been provided through the site with access suitable for Council’s 10.5 metre long, waste collection vehicles. Design ensures that trucks do not have to reverse.

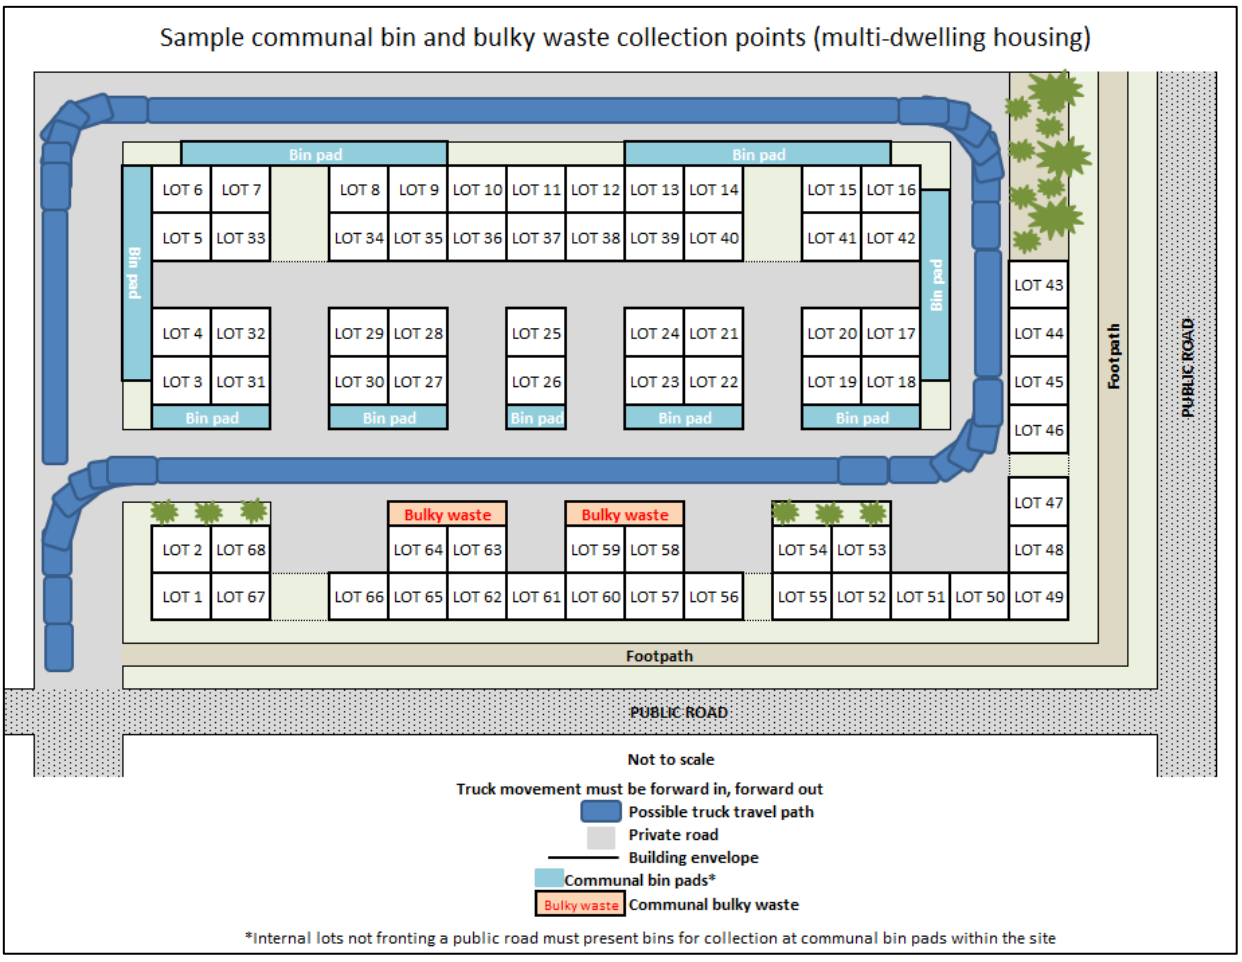


Figure 11: Communal bin and bulky waste collection points (multi-dwelling housing)

6.2 Communal residential bins

The communal bulky waste storage area must be:

- designed to the required size, excluding the path of the door(s)
- located inside the waste room(s) or in a separate location but immediately adjacent to the loading bay
- located on the same level as the waste collection point(s)
- designed so they open straight onto the designated loading bay.

Figure 12 shows a sample residential flat building with bulky waste storage opening onto the loading bay with collection at ground level. The bulky waste storage area is located close to the residential waste room and the onsite loading bay. The bulky waste room is separated from the waste room. Waste room doors are 1.5 metres wide.

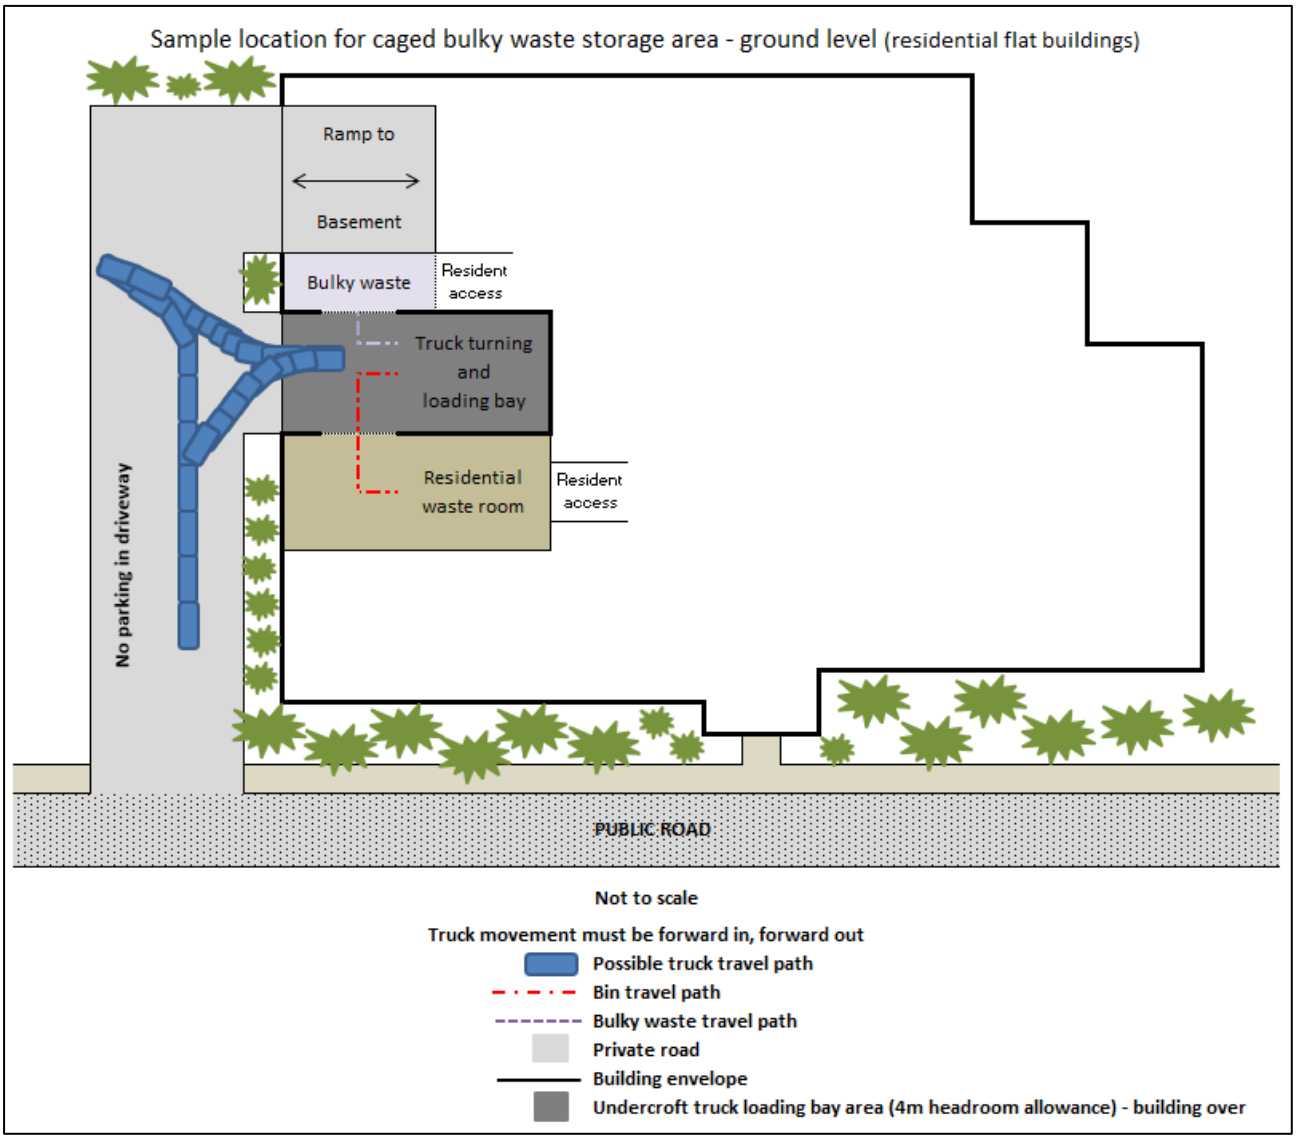


Figure 12: Location for bulky waste storage area - ground level (residential flat building)

Figure 13 shows a sample residential flat building with bulky waste storage opening onto the loading bay with collection from the basement. The bulky waste storage area is located close to the residential waste room and the onsite loading bay. The bulky waste room is separated from the waste room and opens onto the loading bay. Waste room doors are 1.5 metres wide.

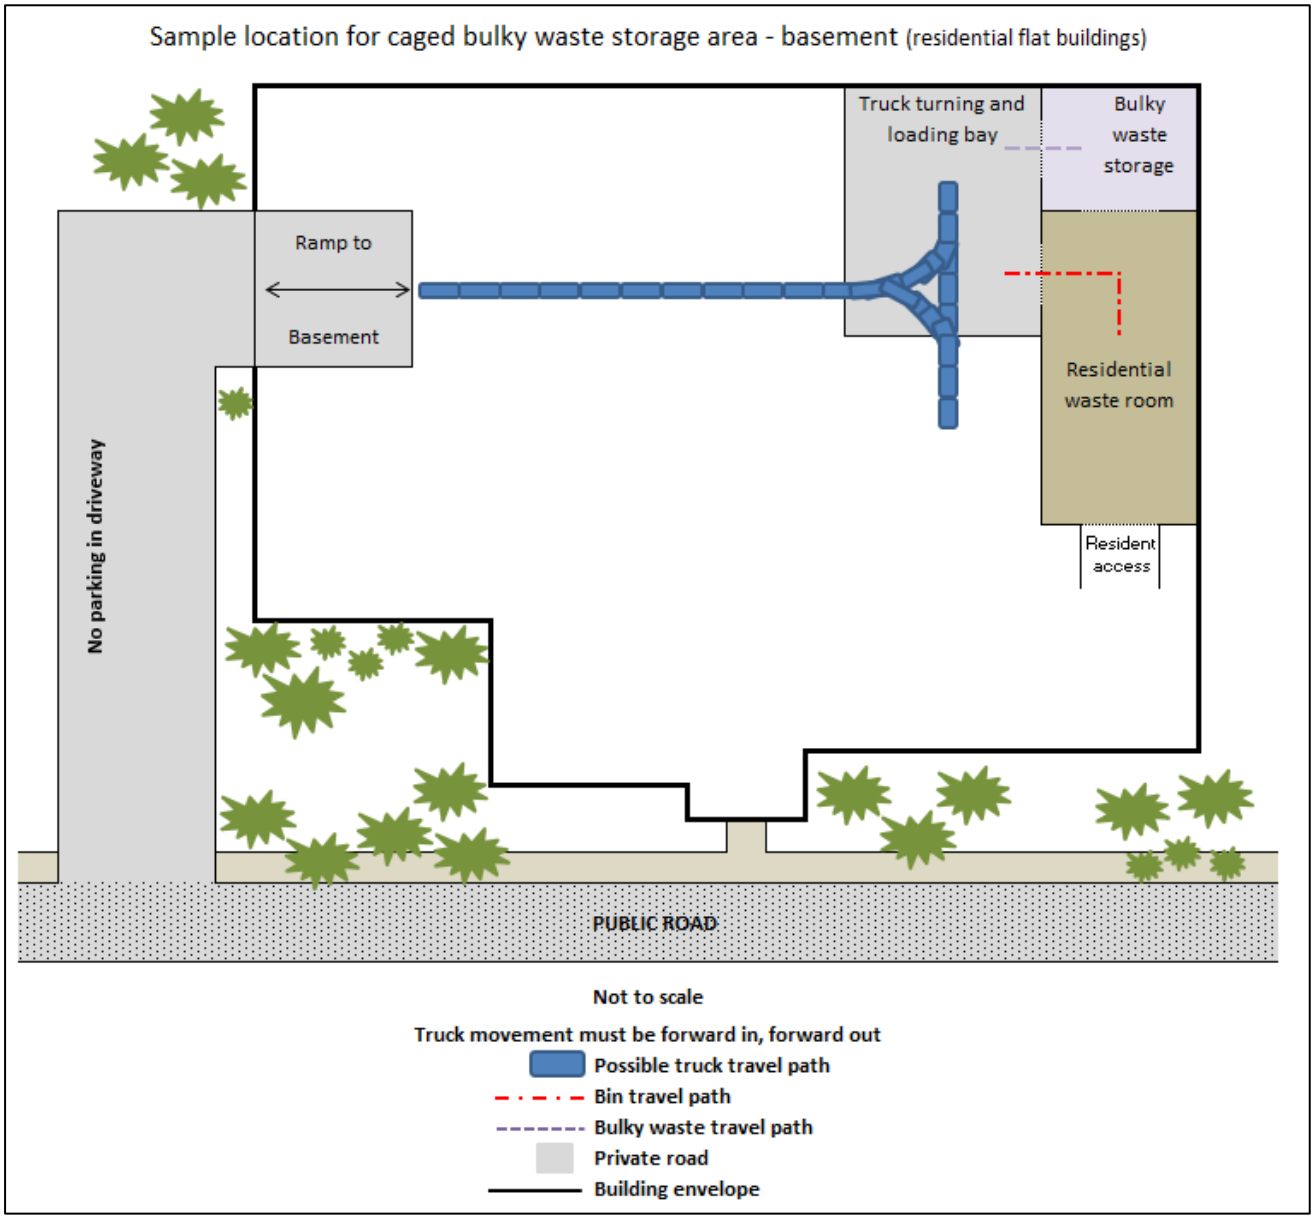


Figure 13: Location for bulky waste storage area - basement (residential flat building)

6.3 Storage - developments with private roads

Multi-dwelling housing developments with 8 units or more with laneways, loop roads and/or private roads, must provide an onsite bulky waste collection point(s) at a rate of:

- 8 square metres for every 40 units and 2 square metres for every 20 units (or part thereof) after that. This can be spread over several locations across the site.

6.4 Storage - communal residential bins

Communal residential developments must provide a bulky waste storage area at a rate of:

- 4 square metres for every 40 units (or part thereof), and 1 square metre for every 20 units (or part thereof) afterwards.

Photo 8 shows a development that has not provided a designated bulky waste storage area onsite which has resulted in resident amenity and safety issues. There are also operational concerns as the waste bins are blocked during bin servicing.



Photo 8: The impact of insufficient or no bulky waste storage onsite

6.5 Storage - non-residential development

Non-residential development must provide a bulky and problem waste storage area(s) of at least:

- 2 square metres for developments under 100 square metres
- 4 square metres for developments between 100 to 2000 square metres
- an additional 4 square metres is required for each retail accommodation or entertainment development over 2000 square metres and for every 20,000 square metres of office space.

7. Chutes

Chutes are required for any residential or mixed use development of 3 storeys or more with a lift.

7.1 Design

Chutes must:

- be for garbage only. Dual chutes and e-diverters for waste and recyclables are not supported.
- be a maximum 30 metres from any dwelling on any residential floor
- be contained within a waste chute room on each residential level with storage for a 240 litre recycling bin to be rotated by the building manager
- be designed to reduce noise nuisance
- be completely enclosed and fire rated to comply with the National Construction Code
- discharge directly into 1100 litre bulk waste bins in the waste room or chute discharge room
- be caged at the discharge point if located inside the main waste room(s)
- comply with manufacturer specifications and operational limitations

7.2 Chute contingency

Where chutes are proposed, applicants must demonstrate that the waste chute rooms can accommodate a 240 litre bin for waste and a 240 litre bin for recycling in case the chutes fail or malfunction. The building manager must rotate these bins as required.

7.2.1 Bin tippers

As part of this contingency plan, a bin tipper must also be provided for the site. Bin tippers will allow the contents of the 240 litre waste bins to be transferred to the larger 1100 litre waste bins in the waste rooms. Consideration must be given to the required clearance heights for the bin tipper in the location where it will be operating. The location of the bin tipper must be identified on the architectural plans. The waste management plan must include the specification sheet, details on how this equipment will be used onsite and where it will be stored.

8. Bin movement

Select bin movement aids by considering the distance that the bins need to be moved across a site to get them from the interim waste room(s) to the waste room(s) and collection point(s). Maximum bin travel distances are outlined in *Part G Waste management and minimisation*.

8.1 Bin movement aids

Designs must ensure that bins and bulky waste do not need to be manually moved from the storage area to the collection point through high traffic areas such as driveways or at the base of ramps.

9. Collection

Please see the matrix in Appendix 1 as it identifies the collection point for a variety of development types.

9.1 Kerbside collection

Kerbside collection points must be clear of obstructions along the subject property's frontage. Figure 14 demonstrates suitable presentation and clearance from driveways, light and power poles, street furniture, bus stops, landscaping and trees.

Bin collection must be away from intersections and not on arterial roads. It must be demonstrated that bin collection from the kerbside does not impact resident amenity or cause safety or operational issues.

Bins must only be placed in single file at the kerbside (see Photo 10 and 11). Bins stacked 2 or more deep at the kerbside cannot be collected (see Photo 12).

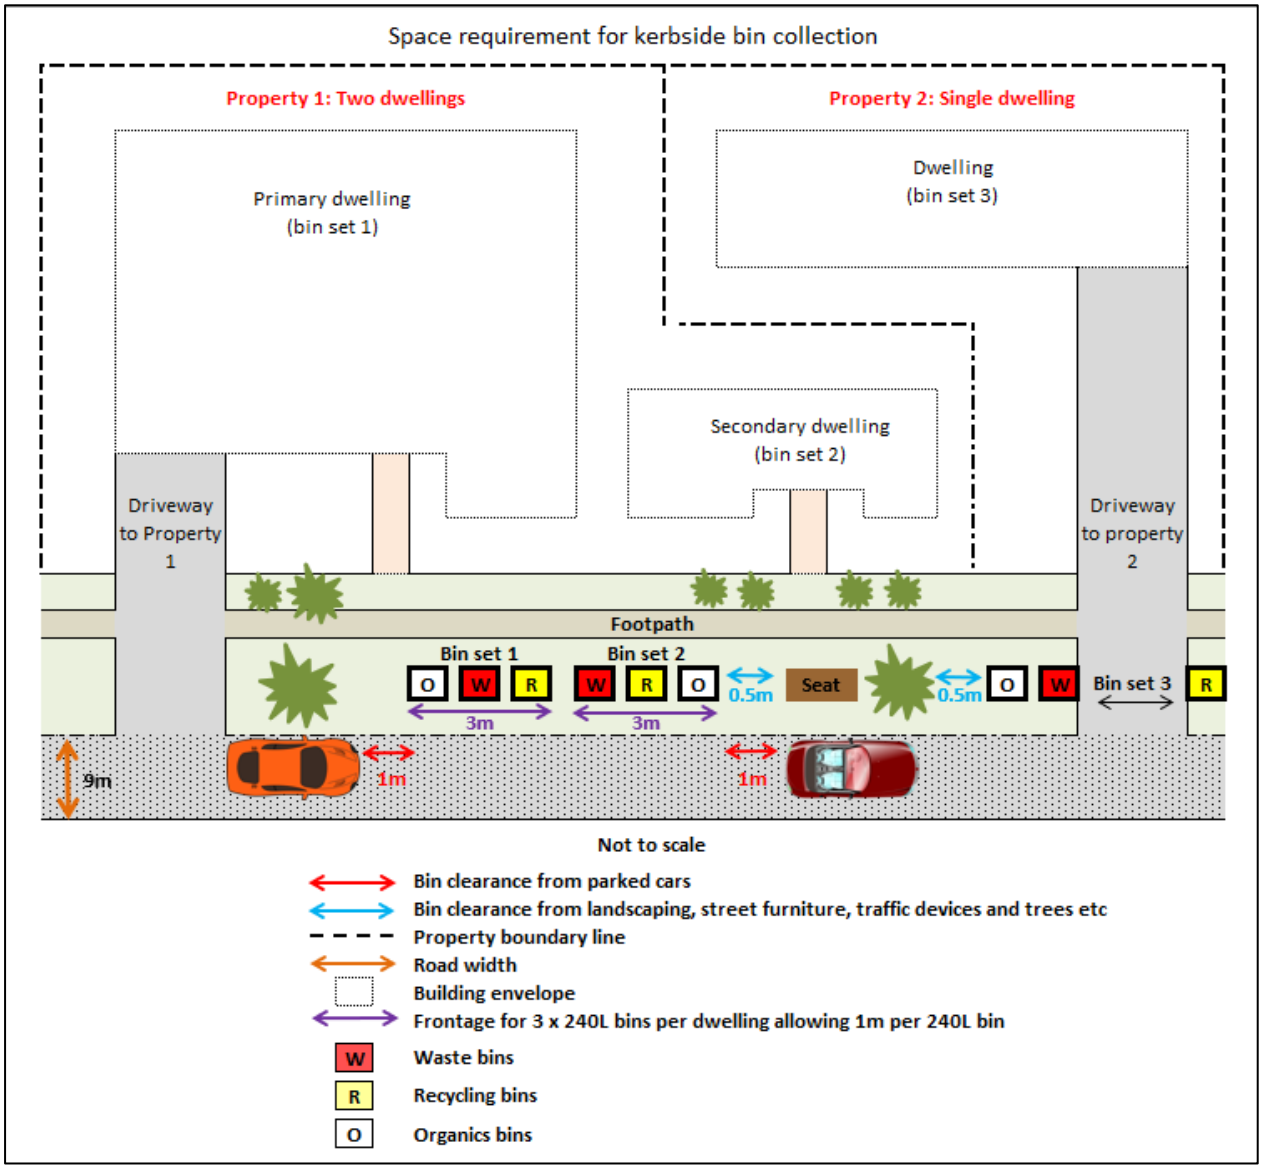


Figure 14: Space requirement for kerbside bin collection



Photo 10: Correct bin placement - bins are placed in single file at the kerbside



Photo 11: Correct bin placement - bins are placed in single file at the kerbside



Photo 12: Incorrect bin placement - bins must not be stacked at the kerbside

Photos 13 and 14 are examples of unsuitable bin collection points. Site design that results in poor outcomes in relation to waste operations, resident amenity and pedestrian and vehicular safety, will not be supported. These bin collection points negatively impact the visual amenity of the surrounding area. They can also lead to traffic hazards as bins are left in the carriageway. Extensive bin pads along public roads also affect waste operations as parked cars block access to the bins placed out for collection.

Photo 15 shows collection points without suitable frontage and bins are placed in banks on street corners causing blind spots for road users and hazards for pedestrians on the footpaths.



Photo 13: Unsuitable bin collection point – parked cars prevent collection



Photo 14: Unsuitable bin collection point – parked cars prevent collection



Photo 15: Unsuitable bin collection points with inadequate space for bins

9.1.1 Kerbside collection from private roads

For developments serviced by laneways, loop roads, punch throughs and/or private roads with access through a cul-de-sac head, bins cannot be collected from the cul-de-sac head. An alternative collection point must be identified in these instances including onsite collection.

9.2 Onsite collection

Onsite collections must occur for the following:

- all residential flat buildings
- multi-dwelling housing developments with 8 dwellings or more
- mixed use developments
- other developments as assessed.

9.2.1 Ground level and basement

The matrix at Appendix 1 identifies where onsite collection is required and where it can be at ground level or in the basement.

Where a development application proposes onsite collection at ground level, it must demonstrate that there are no adverse impacts on residential amenity or safety, and that the at-grade collections result in an improved design outcome for the development with more efficient functionality of the waste management system. It must be located towards the rear of the site, behind the building line. Figures 4 to 10 inclusive provide more information.

Ensure onsite loading bays allow the trucks to reverse in and collect bins and bulky waste from the rear. This eliminates contractors having to move loaded bins in a carriageway.

9.2.2 Turntables

Using turntables for waste collection is not preferred due to their short 10 year lifespan and expensive minimum $100,000 replacement costs. They also require regular maintenance and servicing annually.

Turntables also require additional design considerations to ensure water doesn't enter the mechanical parts and that items do not get stuck in the equipment both of which are likely issues in a waste storage and collection area.

In the event of turntable malfunction, failure or complete breakdown, waste collection trucks would be required to either reverse into or out of the site to service bins as the site has been designed with complete reliance on a turntable for truck manoeuvring. Revering through the public domain across public footpaths and into or out of public roads, is not acceptable. It can take time to raise enough funds to replace this equipment in a strata managed building which is of concern if the sinking funds have not been well maintained or managed for the site.

Where turntables are proposed, it must be demonstrated that the required waste collection vehicle can complete the necessary movements without the use of the turntable. This ensures service continuity in the event the turntable fails.

9.2.3 Collection for commercial, retail and industrial sites

Commercial and retail waste collections must not occur at the kerbside or from other parts of the site including landscaped, parking or manoeuvring areas. Collection must be via an onsite loading bay with a waste room that opens directly onto it with access from a public laneway or public road. Table 7 shows the result of a poorly designed waste collection point for a commercial site.

Table 7: Poorly designed commercial waste collection point

What is the problem?	
• bins not contained within an appropriate waste room • bins are overflowing • kerbside placement of commercial bins encourages illegal dumping • no ownership of bins to ensure they are used efficiently and effectively • amenity issues for the development and surrounding users.	

10. Private contractors

Developments must be designed to accommodate a waste service to the requirements outlined by *Part G Waste management and minimisation*. This ensures residents are always able to access waste services provided by Council, including household clean ups.

A private waste and recycling service may be elected for a development. If private contractors are selected, you must consult with the contractor for service requirements in the early stages of development.

Alternative methods of waste collection may be required for selected sites as determined by Council during the assessment process. Truck access and design where the use of small rigid vehicles is the only option (see Section 11.7), design must be in accordance with AS2890.2.

Where it is demonstrated that a site cannot accommodate a residential waste service to Council's requirements or if the applicant chooses to engage a private waste and recycling contractor, details of the collection arrangement must be outlined in the waste management plan.

10.1 Selecting private contractors

The private waste and recycling contractors must be experienced in collecting and managing waste in Western Sydney. Applicants must provide confirmation on company letterhead from 2 established private waste and recycling contractors that they can access and service the site with the proposed vehicle. The Owners Corporation/Body Corporate must fund a private service.

10.2 Section 88E for private contractors

For residential developments serviced by private contractors, your residents will not have access to Council's waste, recycling and household clean-up services for furniture and whitegoods.

A Section 88E will be imposed on any consent requiring a private contractor to indemnify Council in respect of any claim regarding the non-provision of bin and bulky waste services by Blacktown City Council.

11. Truck access

Entry and egress points, internal roads and access points must be designed to ensure that the specifications and dimensions of the proposed collection vehicles can be accommodated. The waste management plan must confirm that the development has been designed to accommodate the Council's waste collection vehicle specifications and dimensions (see Template 1).

Table 8 and 9 contain specifications for Council's side lift and rear lift collection vehicles. These will be needed when designing onsite access for waste collection vehicles.

Table 8: Council's side lift collection vehicle dimensions

Council automated side lift collection vehicles	Dimensions
Actual height (operational with bin loaded)	3.8 metres
Minimum width	2.6 metres
Minimum length	10.5 metres
Maximum weight loading	24 tonne
Lift side	Left
Travel clearance height	4.0 metres

Table 9: Council's rear lift collection vehicle dimensions

Council rear load waste collection vehicles	Dimensions
Actual height	3.6 metres
Minimum width	2.6 metres
Minimum length	10.5 metres
Maximum weight loading	24 tonnes
Travel clearance height	4.0 metres

11.1 Minimum design requirements

You must cater for the following at the design stage:

- truck access based on Council's vehicle (see Template 1)
- that the truck travel path is rated suitable for a 24 tonne truck.
- turning circles and clearances to kerbs, existing buildings and other obstructions designed to accommodate the required collection vehicle that may service the site.

Architectural plans must demonstrate:


- that collection vehicles can easily access the collection point without the need to reverse outside of the site boundaries. Onsite 3-point turns are acceptable. This must be demonstrated without the use of a turntable
- a minimum vertical clearance of 4 metres for the vehicles entire travel path and in any turning areas for Council's collection vehicle

- that ramp grades and changes of rate of grade on the ramp for any collection occurring in a basement, do not exceed 15.4%, in line with Australian Standard AS2890.2 *Parking Facilities: Off-Street Commercial Vehicle Facilities* (Tables 3.2 and 3.3)
- an additional 3 metre clearance in the loading bay either to the rear or the front of the truck for bin servicing and/or compactor/skip bin operation.

11.2 Demonstrating onsite truck access

You must provide the following to demonstrate suitable truck access onsite:

- swept paths for the trucks entire travel path from entry to exit and in all manoeuvring areas. Template 1 contain more information
- vertical cross section plans demonstrating a 4 metre vertical clearance for the trucks entire travel path
- AutoCAD files in DWG format and 1:1 scale for both the vertical and horizontal clearances for the trucks entire travel path.

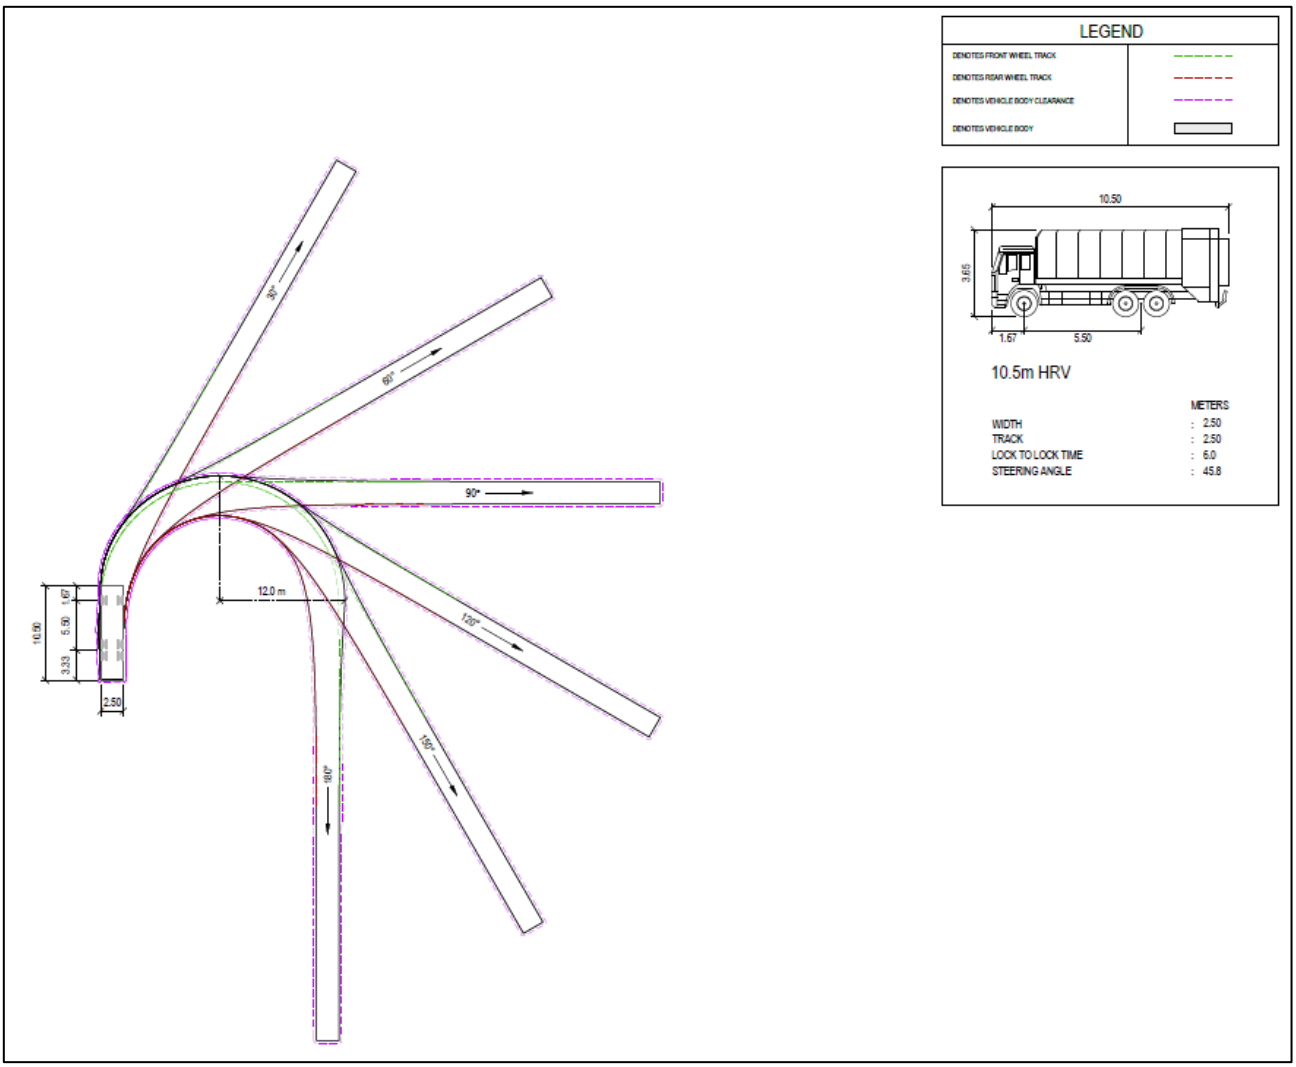

Template 1: Council's vehicle specification

11.3 Rear lift collection vehicles

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- swept paths suitable for a 10.5 metre long, rear lift collection vehicle for the trucks entire travel path including forward entry and exit and around the collection point.
- a minimum vertical clearance of 4 metres in the collection area.

11.4 Side lift collection vehicles

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- swept paths suitable for a 10.5 metre long, side lift waste collection vehicle for the trucks entire travel path including forward entry and exit and around the collection point.
- a minimum vertical clearance of 4 metres in the collection area.

11.5 Front lift collection vehicles

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- swept paths suitable for an 11.8 metre long, heavy rigid, front lift waste collection vehicle servicing 1 to 4.5 cubic metres bulk bins in line with the EPA *Better Practice Guide for Resource Recovery in Residential Developments 2019*. This is required for the vehicles entire travel path including forward entry and exit and around the collection point.
- a minimum vertical clearance of 6.5 metres in the collection area in line with the EPA *Better Practice Guide for Resource Recovery in Residential Developments 2019.*

11.6 Hook lift collection vehicles

The information submitted with the development application must be supported by scaled site and floor plans that clearly identify:

- swept paths suitable for a 10 metre long, heavy rigid, hook lift waste collection vehicle servicing 1 to 36 cubic metre skip bins in line with the EPA *Better Practice Guide for Resource Recovery in Residential Developments 2019*. This is required for the trucks entire travel path including forward entry and exit and around the collection point.
- a minimum vertical clearance of 7.1 metres in the collection area in line with the EPA *Better Practice Guide for Resource Recovery in Residential Developments 2019.*

11.7 Constrained sites

Smaller and isolated sites may be problematic for waste collection, particularly for when they are unable to consolidate with surrounding lots. These sites may require an alternative onsite service arrangement with a small rigid waste collection vehicle (as defined by Australian Standard 2890.2).

Council may use the below criteria to determine if an alternative arrangement is permitted. This may include, but is not limited to, sites that:

- cannot accommodate a safe and/or efficient kerbside collection
- have insufficient and/or unsuitable frontage for kerbside collection
- have access off cul-de-sac heads with limited frontage within in the lot boundary
- are located within a 1 kilometre radius of Transport for New South Wales designated train stations. Here commuter car parking prevents kerbside collection and ‘no parking’ signage is permitted only with approval from Transport for New South Wales. Train stations include Blacktown, Mount Druitt, Seven Hills, Quakers Hill and Schofields.

12. Appendix 1 - matrix

Typology			Dwelling houses (single unit)	Dual occupancy	Multi-dwelling housing			Residential flat buildings and/or build to rent housing		Boarding houses and/or co-living		
Design			Including group homes, secondary dwellings, detached studios and semi-detached dwellings		7 units or less	8 units or more with individual bins and loop road	8 units or more with shared bins and no loop road	sites under 1500sqm	sites 1500sqm or more	10 rooms or less	11 rooms or more and/or sites less than 1500sqm	Sites 1500sqm or more
Collection method			Kerbside - side lift vehicle	Kerbside - side lift vehicle	Kerbside - side lift vehicle	Onsite at grade - side lift vehicle	Onsite at grade - rear lift vehicle	Onsite at grade - rear lift vehicle	Onsite from basement - rear lift vehicle	Kerbside - side lift vehicle	Onsite at grade - rear lift vehicle	Onsite from basement - rear lift vehicle
Development Control Plan sections and references	Waste management plan	5.2.1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Internal waste and recycling storage	5.2.2	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Daily bin storage	5.3.1	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Bulky waste	5.3.2	✗	✗	✗	✓	✓	✓	✓	✓	✓	✓
	Chutes	5.3.3	✗	✗	✗	✗	✗	✓	✓	✗	✓	✓
	Bin travel distances	5.3.4	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Bin travel paths	5.3.5	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Bin transfer grades	5.3.6	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Collection points	5.3.7	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	Onsite truck access	5.3.8	✗	✗	✗	✓	✓	✓	✓	✗	✓	✓
	Loading bays	5.3.9	✗	✗	✗	✗	✓	✓	✓	✗	✓	✓
	Loading dock management plan	5.3.10	✗	✗	✗	✗	✗	✗	✗	✗	✗	✗
	Plan of Management	5.3.11	✗	✗	✗	✗	✗	✗	✗	✓	✓	✓

Note: for any development proposal, applicants must also consult Sections 1 to 4 (inclusive).


Typology			Seniors housing				
Design			multi dwelling housing - 7 units or less	multi-dwelling housing - 8 units or more with individual bins and loop road	multi-dwelling housing - 8 units or more with shared bins and no loop road	residential flat building - sites under 1500sqm	residential flat building - sites 1500sqm or more
Collection method			Kerbside - side lift vehicle	Onsite at grade - side lift vehicle	Onsite at grade - rear lift vehicle	Onsite at grade - rear lift vehicle	Onsite from basement - rear lift vehicle
Development Control Plan sections and references	Waste management plan	5.2.1	✓	✓	✓	✓	✓
	Internal waste and recycling storage	5.2.2	✓	✓	✓	✓	✓
	Daily bin storage	5.3.1	✓	✓	✓	✓	✓
	Bulky waste	5.3.2	✗	✗	✓	✓	✓
	Chutes	5.3.3	✗	✗	✗	✓	✓
	Bin travel distances	5.3.4	✓	✓	✓	✓	✓
	Bin travel paths	5.3.5	✓	✓	✓	✓	✓
	Bin transfer grades	5.3.6	✓	✓	✓	✓	✓
	Collection points	5.3.7	✓	✓	✓	✓	✓
	Onsite truck access	5.3.8	✗	✓	✓	✓	✓
	Loading bays	5.3.9	✗	✗	✓	✓	✓
	Loading dock management plan	5.3.10	✗	✗	✗	✗	✗
	Plan of Management	5.3.11	✗	✗	✗	✗	✗

Note: for any development proposal, applicants must also consult Sections 1 to 4 (inclusive).
The requirements for seniors housing don't include waste collection requirements for a residential aged care facility. If your development application includes a residential aged care facility component, contact Council's Sustainable Resources section for further information.

Typology			Shop top housing			Small office, home office (SOHO)			Mixed use, hotel, motel, serviced apartments, retail and/or commercial premises		
Design			7 units or less	8 units or more with individual bins and loop road	8 units or more with shared bins and no loop road	7 units or less	8 units or more with individual bins and loop road	8 units or more with shared bins and no loop road	sites under 1500sqm	sites 1500sqm or more	sites of variable size with proposed supermarket
Collection method			Kerbside - side lift vehicle	Onsite at grade - side lift vehicle	Onsite at grade - rear lift vehicle	Kerbside - side lift vehicle	Onsite at grade - side lift vehicle	Onsite at grade - rear lift vehicle	Onsite at grade - rear lift vehicle	Onsite from basement - rear lift vehicle	Onsite at grade - front or rear lift vehicle
Development Control Plan sections and references	Waste management plan	5.2.1	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Internal waste and recycling storage	5.2.2	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Daily bin storage	5.3.1	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Bulky waste	5.3.2	✔	✔	✔	✘	✘	✘	✔	✔	✔
	Chutes	5.3.3	✔	✔	✔	✘	✘	✘	✔	✔	✔
	Bin travel distances	5.3.4	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Bin travel paths	5.3.5	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Bin transfer grades	5.3.6	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Collection points	5.3.7	✔	✔	✔	✔	✔	✔	✔	✔	✔
	Onsite truck access	5.3.8	✘	✔	✔	✘	✔	✔	✔	✔	✔
	Loading bays	5.3.9	✘	✔	✔	✘	✘	✔	✔	✔	✔
	Loading dock management plan	5.3.10	✘	✔	✔	✘	✘	✘	✔	✔	✔
	Plan of Management	5.3.11	✘	✘	✘	✘	✘	✘	✘	✘	✘
Note: for any development proposal, applicants must also consult Sections 1 to 4 (inclusive).											

Typology			Centre-based child care facility			Educational establishment	Industrial
Design			up to 7 bins	8 bins or more and/or sites less than 1500sqm	sites 1500sqm or more	sites of variable size	sites of variable size
Collection method			Kerbside - side lift vehicle	Onsite at grade - front or rear lift vehicle	Onsite from basement - front or rear lift vehicle	Onsite at grade - front or rear lift vehicle	Onsite at grade - front or rear lift vehicle
Development Control Plan sections and references	Waste management plan	5.2.1	✔	✔	✔	✔	✔
	Internal waste and recycling storage	5.2.2	✔	✔	✔	✔	✔
	Daily bin storage	5.3.1	✔	✔	✔	✔	✔
	Bulky waste	5.3.2	✔	✔	✔	✔	✔
	Chutes	5.3.3	✘	✘	✘	✘	✘
	Bin travel distances	5.3.4	✔	✔	✔	✔	✔
	Bin travel paths	5.3.5	✔	✔	✔	✔	✔
	Bin transfer grades	5.3.6	✔	✔	✔	✔	✔
	Collection points	5.3.7	✔	✔	✔	✔	✔
	Onsite truck access	5.3.8	✘	✔	✔	✔	✔
	Loading bays	5.3.9	✘	✔	✔	✔	✔
	Loading dock management plan	5.3.10	✘	✘	✘	✘	✔
	Plan of Management	5.3.11	✘	✘	✘	✘	✘
Note: for any development proposal, applicants must also consult Sections 1 to 4 (inclusive).							

13. Appendix 2 - additional information

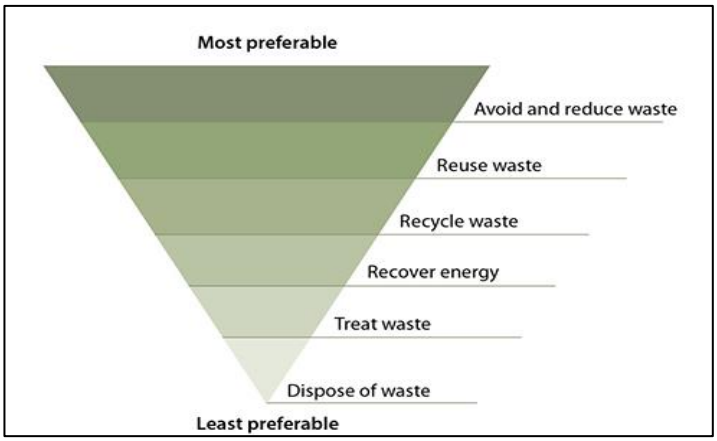4.1 How your development can reduce waste	The *NSW Waste and Resource Recovery Strategy 2014-21* developed a waste hierarchy to identify preferred approaches in managing waste. These principles must underpin the activity across all stages of your development and must be used to prepare and implement your waste management plan. 
4.3 Obligations under the Protection of the Environment Operations Act 1997	It is important to understand and be fully aware of your statutory obligations under the *Protection of the Environment Operations Act 1997* concerning waste management and minimisation. This includes illegal dumping. The *NSW Illegal Dumping Strategy 2017-21* identified in a 2004 survey, that demolition and construction waste was one of the major problems for metropolitan and regional councils equating to 12% of materials dumped illegally. In 2013, the NSW Government introduced new laws concerning illegal dumping including increased penalty notices and prison sentences for repeat offenders.
4.4 Asbestos	Asbestos containing material was widely used in buildings until the late 1980's. However, it is important to note that it was only completely prohibited on 31 December 2003. If you are undertaking demolition, refurbishment or renovation work on an existing dwelling built before 2013, you need to be aware of your statutory obligations under the *Work Health and Safety Act and Regulations*. If asbestos is identified on your site, to satisfy your legal obligation to transport and dispose of it lawfully, you must obtain a WasteLocate consignment number from the asbestos transporter to track the location of this waste to ensure it has reached its intended destination. More information can be found on the NSW EPA website at: http://www.epa.nsw.gov.au/wasteregulation/transport-asbestos-tyres.htm
4.5	**Resource** | **Website**

Useful websites and resources	*Protection of the Environment Operations Act and Regulations*	www.legilsation.nsw.gov.au
	Inside Waste	www.wmaa.asn.au
	Recycling near you	www.recylicngnearyou.com.au
	Environmental Protection Authority	www.epa.nsw.gov.au
	Your home	www.yourhome.gov.au/materials/waste-minimisation
	Planet Ark Business Recycling	www.businessrecycling.com.au
	Better practice guide for resource recovery in residential developments 2019 (NSW Environment Protection Authority)	www.epa.nsw.gov.au

14. Appendix 3 - onsite collection agreement

BY THIS AGREEMENT made between the applicant and the Council, the Council agrees at the request of the applicant, to collect waste from the collection point within the property on the following terms and conditions:

1. Waste will be collected at the same times and on the same conditions as apply to other properties in the area of the property or as otherwise agreed.

2. The applicant authorises the Council and its contractors to enter upon the property with collection vehicles for the collection of waste from the collection point and warrants to the Council that the applicant has the power to do so.

3. Council will not collect waste from the collection point if vehicular access to that point from the public road adjacent to the property is not available or impeded at the time of collection for any reason.

4. The applicant releases the Council and any contractor engaged by it from any claim in respect of damage to the applicant, to the property or to any improvements on the property caused or contributed to by the collection of waste, or by the use of the property by collection vehicles.

5. The applicant indemnifies the Council and any contractor against any claim by a third party arising from:

    a. Any trespass by the Council or its contractor upon the land of that party in the course of carrying out the collection of waste from the collection point;

    b. Any damage to the personal property of that third party, except to the extent that such damage is caused by the negligence of the Council or its contractor.

6. In this agreement:

    a. “Applicant” means the party named in the first schedule

    b. “Collection point” means the place or each of the places within the property described in the second schedule.

    c. “The Council” means Blacktown City Council

    d. “The property” means the property described in the third schedule

    e. “Waste” means any waste or recyclables, the collection of which is included within the Council’s domestic waste management charge.

First schedule

The Applicant

_____

_____

_____

Second schedule
The collection point

_____

_____

_____

Third schedule
The property

_____

_____

_____

Lot number - DP Number _____
Dated:

Signed on behalf of
landlords by:

Strata manager: _____
(Print name)

Strata company: _____

Strata manager contact
number: _____

Strata manager's signature: _____

Owners Strata Plan No. ##

(Place common seal here)

In the presence of (witness):	Witness name	_____ (Print name)
	Witness position	_____
	Witness signature	_____
Signed on behalf of Council by:		
	Council representative:	_____ (Print name)
	Representative's position:	_____
	Representative's signature:	_____
In the presence of (witness):	Witness name:	_____ (Print name)
	Witness position:	_____
	Witness signature:	_____

15. Appendix 4 - waste management plan template

Waste management plan requirements

The relevant sections of this waste management plan template must be completed and submitted with your development application as required in the *Blacktown Development Control Plan 2015*.

This form will help you:

- comply with the planning controls
- avoid delays in the assessment process as you have provided all necessary information
- facilitate access to our waste service in new residential developments
- provide suitable waste management systems for new developments
- provide opportunities for recycling in all stages of your development
- help meet NSW Waste and Sustainable Materials Strategy 2041 recycling targets.

The information provided in this waste management plan and on submitted architectural drawings will be assessed against the objectives of the Development Control Plan. There are checklists at the end of this waste management plan that must be completed as part of your waste submission to Council.

Note: If the space is insufficient in the tables, please provide attachments.

Applicant details

Surname:		First name:	
Company name:			
Address:			
Suburb		Postcode:	
Phone (h):		Phone (w):	
Phone (m):		Fax:	
Email:			

Lawful disposal of waste

You should be aware that under the *NSW Protection of the Environment Operations Act 1997*, **both the owner and transporter of waste** are legally responsible for ensuring that waste is taken to a place that can lawfully accept it.

☐ I understand that it is my responsibility to manage waste on site to prevent the creation of litter.

☐ I am aware of my responsibilities under the *NSW Protection of the Environment Operations Act 1997* in relation to waste.

☐ Where I am not the person responsible for waste management on the site, I will ensure that the person responsible is also aware of the above.

Outline of proposal

Site address:			
Suburb:		Block size:	
Brief description of proposal including the development type, number of units, centre-based child care number of enrolments, retail tenancies etc			

Buildings and other structures onsite:

Declaration

I declare that the information provided in this waste management plan is to the best of my knowledge true.

Applicant signature:		Date:	
Print name:			
Owner's signature:		Date:	
Print name:			

Demolition – waste generation

Type of material	Amount		How will this waste be managed?		
	Volume (cubic metres)	Weight (tonnes)	ONSITE Specify proposed reuse or recycling methods	OFF SITE Specify contractor and recycling outlet	LANDFILL Specify contractor and landfill site
Excavation material					
Garden waste					
Asbestos Include the WasteLocate consignment number from the asbestos transporter.					
Glass, cupboards, doors etc					
Bricks, tiles and concrete					
Timber (clean/treated)					
Plasterboard					
Metals (specify)					
Carpets, paints, plastics etc					
Other (specify)					

Demolition – additional information

The following details must be shown on a site map in your set of architectural plans:

- location of sorting area(s) where waste will be sorted for disposal or recycling
- location of storage area(s) where waste and soil stockpiles will be stored onsite including colour coding of waste containers or the provision of detailed signage
- collection area which is clear of any encumbrances.

Use this section to detail how demolition activity will be managed to reduce waste and increase opportunities for reuse and recycling of waste materials. Example: tool box talks, inductions, staff training, waste management requirements included in contracts with service providers, deconstruction instead of demolition, regular site inspections, onsite litter management etc.

Construction – waste generation

Type of material	Amount		How will this waste be managed?		
	Volume (cubic metres)	Weight (tonnes)	ONSITE Specify proposed reuse or recycling methods	OFF SITE Specify contractor and recycling outlet	LANDFILL Specify contractor and landfill site
Excavation material					
Garden waste					
Glass, cupboards, doors, cardboard, fittings etc					
Bricks, tiles and concrete					
Timber (clean/treated)					
Plasterboard					
Metals (specify)					
Carpets, paints, plastics, PVC tubing etc					
Other (specify)					

Construction – additional information

The following details must be shown on a site map in your set of architectural plans:

- location of sorting area(s) where waste will be sorted for disposal or recycling
- location of storage area(s) where waste and soil stockpiles will be stored onsite including colour coding of waste containers or the provision of detailed signage
- collection area which is clear of any encumbrances.

Use the section below to detail how site activity will be managed to reduce construction waste and increase opportunities for reuse and recycling of waste materials. Example: tool box talks, inductions, staff training, waste management requirements included in contracts with service providers, site inspections, materials reused onsite

Residential – waste generation					
Type of waste generated	**Expected volume per week (litres)**	**Number and size of bins required**		**Collections per week**	**Service provider**
Garbage – building A					
Garbage – building B					
Garbage – building C					
Recycling – building A					
Recycling – building B					
Recycling – building C					

Residential - ongoing management of waste

The following details must be shown on scaled plans:

- details of bin storage and holding areas including dimensions, floor area (square metres) and location
- details of dedicated waste collection point(s) including dimensions, floor area (square metres) and location
- bin travel path from interim waste rooms to waste rooms
- details of any waste management equipment required for the development including suitable storage areas.

Use this section below to add any additional information.

Commercial / industrial – waste generation

Number of tenancies:

Type of waste generated	Expected volume per week (litres/cubic metres)	Number and size of bins required		Collections per week
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	
			_____ L	

Commercial / industrial - ongoing management of waste

The following details must be shown on scaled plans:

- storage area(s) inside all tenancies
- storage area(s) for nominated waste bins
- number of each type of bin (garbage, recycling, bulk cardboard, clinical waste, other relevant waste streams) required for the development;
- details of interim waste rooms and waste rooms including dimensions, floor area (square metres) and location
- details of dedicated waste collection point(s) including dimensions, floor area (square metres) and location
- details of any waste management equipment required for the development including suitable storage areas
- bin travel path from interim waste rooms to waste rooms and collection points

Use the section below to add any additional information

Swept paths – collection on private property

Swept paths and the associated AutoCAD files must be included in your submission to detail how waste collection vehicles will move around the site. You must demonstrate:

- the trucks entire travel path
- forward entry and exit with all maneuvering onsite
- the use of designated loading bays or collection from communal bin pads
- that collections can be carried out in a safe manner
- compliance with AS2890.2 for headroom allowances and horizontal clearances for small rigid vehicles (where permitted) or 4 metres for Council's vehicle
- compliance with AS2890.2 (Tables 3.2 and 3,3) for ramp grades and changes of rate of grade on the ramp where applicable

Note: Swept path analysis must be prepared by a traffic engineer in accordance with AS2890.2.

Bulky waste - all development types	
Residential storage area provided (m²)	
Location of storage area(s)	
Commercial storage area provided (m²)	
Location of storage area(s)	
Mixed use storage area provided (m²)	
Location of storage area(s)	
Retail storage area provided (m²)	
Location of storage area(s)	
Industrial storage area provided (m²)	
Location of storage area(s)	

Supporting documentation - attachment list		
Component	**Drawing reference number (eg A105)**	**Format where the component is demonstrated (eg, waste management plan, traffic report, architectural drawings)**
Waste rooms		
Interim waste room(s)		
Waste room(s)		
Separated commercial and residential waste room(s) - mixed		
Communal bulky waste storage area(s)		
Secure bin tug and trolley storage		
Waste chute room with 240L recycling bin on each residential floor		
Caged chute discharge point(s)		
Bin lifter location and storage area		
Compactor location and storage area		
Baler location and storage area		
Bin storage, movement and collection		
Internal waste and recycling storage		
Daily bin storage area		
Bin collection point(s)		
Loading bay(s)		
Bin travel path from interim waste room to waste		

Bin travel path from waste room to collection point		
Bin tug travel path from interim waste room(s) to waste room(s)		
3m additional rear clearance for bin servicing (rear loader)		
3m additional front clearance for bin servicing (front lift)		
Secure location for storage of medical and clinical waste		
Truck movement		
Swept path for the trucks entire travel path		
Vertical cross section plans for trucks entire travel path		
AutoCAD files for trucks entire travel path		

Demolition checklist

This checklist must be completed as part of your waste management plan for demolition activity.

Checklist		Answered ✔ ✘
Must be used for:	any demolition activity.	
Does your waste management plan answer these questions?	• will the development reduce waste requiring disposal?	
	• do adaptive reuse opportunities exist for building structures etc?	
	• have you determined the types and quantities of materials that can be reused or recycled?	
	• will you have storage containers for recyclables, e.g. glass, metal?	
	• is there a provision for collection of daily rubbish and litter?	
	• will the waste receptacles be covered when not in use?	
	• will you separate materials for reuse, recycling and disposal?	
	• have you reviewed steps for safe and lawful removal of waste?	
	• have you engaged a suitably qualified and licenced professional for removal and disposal of asbestos containing material?	
	• does truck access comply with Australian Standard 2890.2?	
	• have you requested the WasteLocate consignment number from the asbestos transporter to track the location of this waste if identified onsite? This is your legal obligation as the generator and owner of that waste - more information can be found at: https://www.epa.nsw.gov.au/your-environment/waste/transporting-asbestos-waste-tyres/tracking-asbestos-waste-locate	
	• have you reviewed *Asbestos Management in Blacktown City*, for specific information on dealing with asbestos?	
	• can waste materials generated from demolition activity be recycled or reused?	
	• have you made arrangements with contractors to ensure materials that can't be reused or recycled are safely separated and disposed of at licenced landfills?	
	• will asbestos, hazardous and/or intractable wastes be disposed of in accordance with WorkSafe NSW and EPA requirements?	
	• will you increase waste avoidance?	
	• will you limit site disturbance and unnecessary excavation?	
	• will data be collected and records kept (including dockets) to ensure the lawful disposal of waste?	
	• will contractors and other relevant parties be aware of their legal requirements for waste disposal and their responsibilities under the waste management plan?	
	• have you planned for onsite communication strategies, such as signage, toolbox talks and inductions?	
	• will storage areas for reusable and recyclable materials be clearly identified with their intended contents and purpose?	
	• have you identified the waste storage area(s) including the bins?	
	• can trucks access the waste storage area?	
	• have you completed a waste management plan?	
Additional Information	table 1	

Construction checklist

This checklist must be completed as part of your waste management plan for construction activity.

Checklist		**Answered** ✔ ✘
Must be used for:	any construction activity.	
Does your waste management plan answer these questions?	• will the development reduce waste requiring disposal?	
	• do adaptive reuse opportunities exist for the building structures?	
	• have you determined the types and quantities of materials that can be reused or recycled?	
	• have you determined the types and quantities of materials used for construction?	
	• is there a provision for collection of daily rubbish and litter?	
	• will the waste receptacles be covered when not in use?	
	• have you provided separate bins for residual waste?	
	• will you separate materials for reuse, recycling and disposal?	
	• have you developed an estimating and purchasing policy?	
	• will you use prefabricated and recyclable materials?	
	• have you reviewed steps for safe and lawful removal of waste?	
	• does truck access comply with Australian Standard 2890.2?	
	• will you increase waste avoidance?	
	• will data be collected and records kept (including dockets) to ensure the lawful disposal of waste?	
	• will contractors and other relevant parties be aware of their legal requirements for waste disposal and their responsibilities under the waste management plan?	
	• have you planned for onsite communication strategies, such as signage, toolbox talks and inductions?	
	• will storage areas for reusable and recyclable materials be clearly identified with their intended contents and purpose?	
	• have you identified the waste storage area (s) including the bins?	
	• can trucks access the waste storage area?	
	• do you have storage for recyclables eg, glass and metal?	
	• have you completed a waste management plan?	
Additional Information	• table 2.	

Residential checklist – individual bins

This checklist must be completed as part of your waste management plan for residential developments with individual bins.

Checklist		**Answered** ✔ ✘
Must be used for:	single dwellings	
	secondary dwellings	
	some multi-dwelling housing developments	
	semi-detached dwellings.	
Does your waste management plan answer these questions?	• does the bin storage area accommodate Council's standard bins?	
	• is the bin storage area located conveniently for residents?	
	• is the bin storage area behind the building line and screened?	
	• is access to the collection point easy, direct and convenient?	
	• is the frontage suitable for all required bins?	
	• does each dwelling have 3 metres by 1 metre of frontage?	
	• is the frontage compliant with clearances outlined in Figure 1?	
	• is the bin travel distance a maximum 30 metres?	
	• do you comply with a maximum bin transfer grade of 1:14?	
	• are you aware purchasers will be informed if they are affected by onsite waste facilities, bin and bulky waste storage areas and/or bin and bulky waste collection points via a Section 88E instrument?	
	• have you indicated the daily bin storage area for the dwellings?	
	• have you detailed the storage area size for all bins?	
	• have you indicated the nominated kerbside collection point?	
	• is there a 1 metre wide paved surface from the storage area to the collection point?	
	• does truck access comply with our requirements if bins are collected from private roads?	
	• have you provided a communal bulky waste collection point if a communal bin pad along a private road is proposed/required?	
	• have you demonstrated bin collection from the perimeter streets in developments with laneways? This is Council's preference.	
	• where bins must be collected within a laneway, does laneway design comply with our requirements?	
	• where bins must be collected within a laneway, have you catered for collection from one side of the laneway only?	
	• have you completed a waste management plan?	
Additional Information	figure 1, 2 and 14	
	photo 3, 4, 5, 6, 9, 10,11, 12 and 13	
	table 5 and 8	
	template 2	

Residential checklist – communal bins

This checklist must be completed as part of your waste management plan for residential developments with communal bins.

Checklist		Answered ✔ ✘
Must be used for:	some multi-dwelling housing developments	
	attached dwellings (3 or more dwellings)	
	residential flat buildings	
	seniors housing	
	build to rent housing	
	student housing	
	serviced apartments	
	manor houses	
	affordable rental housing developments	
	boarding houses	
	other applications as assessed.	
Does your waste management plan answer these questions?	• does each unit have internal storage for one days' worth of waste and recyclables?	
	• are ground level waste rooms (if permitted), incorporated into the building footprint?	
	• does the walk distance with bagged rubbish exceed 30 metres?	
	• do you comply with maximum bin travel distances?	
	• do you comply with bin transfer grades?	
	• has a bulky waste storage area been provided at the correct rate?	
	• has the bulky waste storage area been caged and signposted?	
	• is hot and cold water provided in the waste room?	
	• do waste room drains connect to Sydney Water approved sewers?	
	• is waste room access direct, safe and convenient for all users?	
	• can the waste room(s) accommodate all the necessary bins?	
	• is the waste room(s) a regular shape and free from obstruction?	
	• are waste storage areas on the same level as the collection point?	
	• are doorways used to move bins and bulky waste 1.5 metres wide?	
	• is resident access to the waste room not via the loading bay?	
	• are interim waste rooms needed?	
	• does design ensure bins are not manually moved across high traffic areas?	
	• is the storage area for bin movement aids secure and enclosed?	
	• if your site is under 1500 square metres, have you provided onsite collection either at ground level or from the basement?	
	• if your site is over 1500 square metres, have you provided basement collection?	
	• have waste chutes been provided if 3 storeys or more?	
	• is there space for recycling bins in each waste chute room?	
	• are chutes and recycling bins inside a waste chute room?	
	• have you identified the location of the chute discharge point(s)?	

	• are you aware a Council indemnity agreement form is required for onsite collection?	
	• are you aware purchasers will be informed if they are affected by onsite waste facilities, bin and bulky waste storage areas and/or bin and bulky waste collection points via a Section 88E instrument?	
	• have you provided information on all waste equipment for the site?	
	• have you identified any compaction equipment for the site?	
	• can waste vehicles reverse into the loading bay for collection?	
	• have you provided physical treatment to the loading bay?	
	• will you provide no stopping signs for truck turning and collection?	
	• will you provide line marking for truck turning and collection?	
	• can trucks turn around onsite without relying on a turntable?	
	• does the loading bay hold the truck plus a 3 metre rear clearance?	
	• do the waste rooms open straight onto the loading bay?	
	• do bulky waste storage areas open straight onto the loading bay?	
	• does truck access comply with our requirements?	
	• can collection vehicles enter, move, service bins and exit safely?	
	• has onsite collection allowed for forward entry and exit?	
	• have you provided temporary turning heads in the form of a cul de sac where the road network results in a dead end?	
	• do ramp grades and changes of rate of grade comply with Tables 3.2 and 3.3 in Australian Standard AS2890.2?	
	• have you provided vertical cross section plans for truck access?	
	• have you provided swept paths for the trucks entire travel path?	
	• have you provided swept paths where half roads are proposed?	
	• have you provided AutoCAD files in DWG format for truck access?	
	• is the truck travel path sealed and suitable for 24 tonne trucks?	
	• have you provided a plan of management if a boarding house is proposed?	
	• have you competed a waste management plan?	
Additional Information	photo 7, 8, 14	
	figure 3, 4, 5, 6, 7, 8, 9, 10, 11, 12 and 13	
	table 3, 4, 5, 6, 9, and 10	
	template 1 and 2	

Mixed use checklist

This checklist must be completed as part of your waste management plan for mixed use developments.

Checklist		Answered ✔ ✘
Must be used for:	shop top housing	
	mixed use developments.	
Does your waste management plan answer these questions?	• does each unit have internal storage for one days' worth of waste and recyclables?	
	• are ground level waste rooms (if permitted), incorporated into the building footprint?	
	• does the walk distance with bagged rubbish exceed 30 metres?	
	• do you comply with maximum bin travel distances?	
	• do you comply with bin transfer grades?	
	• are residential and commercial waste rooms separated?	
	• are commercial tenants restricted to residential waste room(s)?	
	• has a bulky waste storage area been provided at the correct rate?	
	• has the bulky waste storage area been caged and signposted?	
	• is hot and cold water provided in the waste room?	
	• do waste room drains connect to Sydney Water approved sewers?	
	• is waste room access direct, safe and convenient for all users?	
	• can the waste room(s) accommodate all the necessary bins?	
	• can commercial waste rooms hold 3 days waste and recyclables?	
	• is the waste room(s) a regular shape and free from obstruction?	
	• are waste storage areas on the same level as the collection point?	
	• are doorways used to move bins and bulky waste 1.5 metres wide?	
	• is access to the waste rooms not via the loading bay?	
	• are interim waste rooms needed?	
	• does design ensure bins are not manually moved across high traffic areas?	
	• is the storage area for bin movement aids secure and enclosed?	
	• if your site is under 1500 square metres, have you provided onsite collection either at ground level or from the basement?	
	• if your site is over 1500 square metres, have you provided basement collection?	
	• have waste chutes been provided if 3 storeys or more?	
	• is there space for recycling bins in each waste chute room?	
	• are chutes and recycling bins inside a waste chute room?	
	• have you identified the location of the chute discharge point(s)?	
	• are you aware a Council indemnity agreement form is required for onsite collection of residential bins?	
	• is a private contractor needed for this site?	

	• are you aware purchasers will be informed if they are affected by onsite waste facilities, bin and bulky waste storage areas and/or bin and bulky waste collection points via a Section 88E instrument?	
	• have you provided an onsite trolley management system in accordance with Council's *Abandoned Shopping Trolley Policy P000497.1*?	
	• have you provided information on all waste equipment for the site?	
	• have you identified any compaction equipment for the site?	
	• can waste vehicles reverse into the loading bay for collection?	
	• have you provided physical treatment to the loading bay?	
	• will you provide no stopping signs for truck turning and collection?	
	• will you provide line marking for truck turning and collection?	
	• can trucks turn around onsite without relying on a turntable?	
	• does the loading bay hold the truck plus a 3 metre rear clearance?	
	• do the waste rooms open straight onto the loading bay?	
	• do bulky waste storage areas open straight onto the loading bay?	
	• does truck access comply with our requirements?	
	• can collection vehicles enter, move, service bins and exit safely?	
	• has onsite collection allowed for forward entry and exit?	
	• have you provided temporary turning heads in the form of a cul de sac where the road network results in a dead end?	
	• do ramp grades and changes of rate of grade comply with Tables 3.2 and 3.3 in Australian Standard AS2890.2?	
	• have you provided vertical cross section plans for truck access?	
	• have you provided swept paths for the trucks entire travel path?	
	• have you provided swept paths where half roads are proposed?	
	• have you provided AutoCAD files in DWG format for truck access?	
	• is the truck travel path sealed and suitable for 24 tonne trucks?	
	• have you provided a loading dock management plan to outline how waste services will use this space when there are competing uses?	
	• have you completed a waste management plan?	
	photo 1 and 2	
Additional Information	figure 9, 10, 12 and 13	
	table 3, 4, 5, 6, 7 and 10	
	template 1 and 2	

Commercial and industrial checklist

This checklist must be completed as part of your waste management plan for commercial and industrial developments.

Checklist		Answered ✔ ✘
Must be used for:	commercial and industrial developments.	
Does your waste management plan answer these questions?	• does each unit have internal storage for one days' worth of waste and recyclables?	
	• does the walk distance with bagged rubbish to your tenancy waste room exceed 30 metres?	
	• do you comply with maximum bin travel distances?	
	• do you comply with bin transfer grades?	
	• has a bulky waste storage area been provided at the correct rate?	
	• has the bulky waste storage area been caged and signposted?	
	• can the waste room be easily cleaned and maintained?	
	• is hot and cold water provided in the waste room?	
	• do waste room drains connect to Sydney Water approved sewers?	
	• where liquid waste is generated, can it be stored in a separate bunded area and drained to a Sydney Water approved grease trap?	
	• do you comply with NSW State Government regulations if your activity generates hazardous or clinical waste?	
	• is the waste room located within the site boundary?	
	• is the waste room screened from public view?	
	• is the waste room covered and weatherproof?	
	• does each tenancy have an individual waste room?	
	• is waste room access direct, safe and convenient for all users?	
	• have you used correct generation rates for waste and recyclables?	
	• can the waste room(s) accommodate all the necessary bins?	
	• can waste rooms hold 3 days waste and recyclables?	
	• is refrigerated storage provided for tenancies generating more than 50 kilograms of seafood, poultry or meat waste a day?	
	• have separate containers for industrial waste been provided?	
	• is the waste room(s) a regular shape and free from obstruction?	
	• are doorways used to move bins and bulky waste 1.5 metres wide?	
	• is access to the waste rooms not via the loading bay?	
	• are interim waste rooms needed?	
	• does design ensure bins are not manually moved across high traffic areas?	
	• is the storage area for bin movement aids secure and enclosed?	
	• have you considered basement collection if your site is over 1500 square metres?	
	• have you indicated a private contractor is needed for this site?	

	• have you provided an onsite trolley management system in accordance with Council's *Abandoned Sopping Trolley Policy P000497.1*?	
	• have you provided information on all waste equipment for the site?	
	• have you identified any compaction equipment for the site?	
	• can waste vehicles reverse into the loading bay for collection?	
	• have you provided physical treatment to the loading bay?	
	• will you provide no stopping signs for truck turning and collection?	
	• will you provide line marking for truck turning and collection?	
	• can trucks turn around onsite without relying on a turntable?	
	• does the loading bay hold the truck plus a 3 metre rear and/or front clearance?	
	• do the waste rooms open straight onto the loading bay?	
	• do bulky waste storage areas open straight onto the loading bay?	
	• have you designed for heavy rigid vehicle access onsite?	
	• does truck access comply with our requirements?	
	• can collection vehicles enter, move, service bins and exit safely?	
	• has onsite collection allowed for forward entry and exit?	
	• do you have private contractor requirements for servicing, access, manoeuvring and clearance heights for onsite collection?	
	• have you provided temporary turning heads in the form of a cul de sac where the road network results in a dead end?	
	• do ramp grades and changes of rate of grade comply with Tables 3.2 and 3.3 in Australian Standard AS2890.2 (if applicable)?	
	• have you provided vertical cross section plans for truck access?	
	• have you provided swept paths for the trucks entire travel path?	
	• have you provided swept paths where half roads are proposed?	
	• have you provided AutoCAD files in DWG format for truck access?	
	• is the truck travel path sealed and suitable for 24 tonne trucks?	
	• have you provided a loading dock management plan to outline how waste services will use this space when there are competing uses?	
	• have you completed a waste management plan?	
	photo 1 and 2	
Additional Information	table 3, 4, 5, 6, 7 and 10	
	template 1 and 2	