



THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO Y-S ELECTRONIC, ANY REPRODUCTION IN PART OR WHOLE WITHOUT PRIOR WRITTEN APPROVAL OR AUTHORIZATION OF Y-S ELECTRONIC IS STRICTLY PROHIBITED.

RoHS COMPLIANT

REVISIONS

REV	ECN NO.	DESCRIPTION	APPROVED BY	DATE
A		△	ELTON MENG	2006-11-01

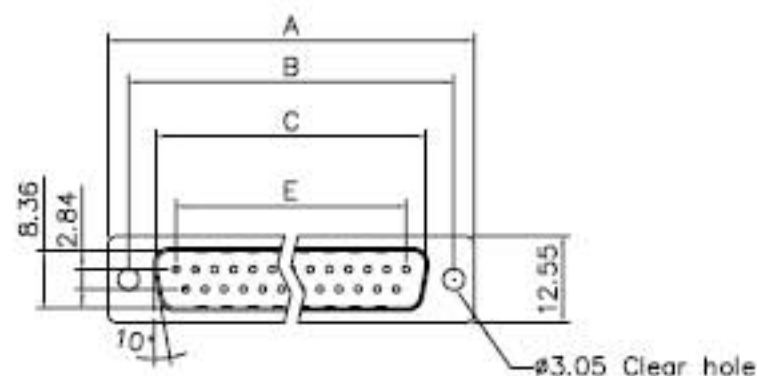

Cover

Product Specification

Material

Insulator : Glass-Filled Thermoplastic PBT, UL94V-0

Contact : Copper alloy

Shell : Steel, 100u" Tin Over 50u" min Copper

Electrical


Contact Resistance : 20 milliohms
Max at 1 AMP DC.

Insulation Resistance : 1000
megohms at 500 VDC



Dielectric Withstanding Voltage :
1000 VAC/rms 60Hz for 1 minute

Current Rating : 3 AMP

Voltage Rating : 250 VAC/rms 60Hz

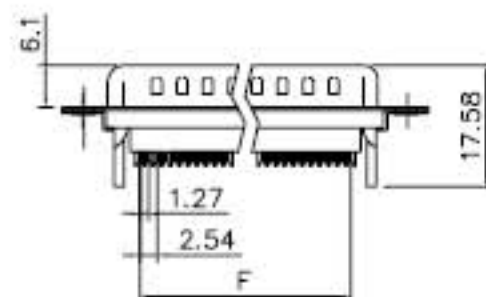

Without Insulator Support

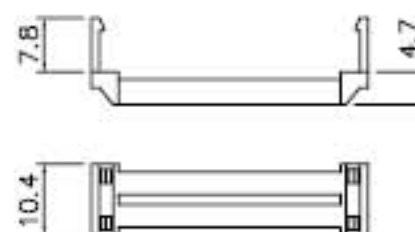

Strain Relief

Dimensions

Positions	A	B	C	E	F
9	30.81	24.99	16.92	11.08	10.16
15	39.20	33.30	25.25	19.39	17.78
25	53.04	47.04	38.96	33.24	30.48
37	69.40	63.50	55.42	49.86	45.72

DIMENSIONS

☐ MM [INCH] ☐ INCH [mm] ☒ MM ONLY

UNLESS OTHERWISE SPECIFIED,
GENERAL TOLERANCE:

DECIMALS ANGLES
X: ±0.38 (0.015) X*: ±3°
.X: ±0.25 (0.010) .X*: ±1.0°
.XX: ±0.13 (0.005)

MATERIAL

FINISH

CAD GENERATED DRAWING,
DO NOT MANUALLY UPDATE

DRAWN BY AND DATE
JUSTIN XING 11-01-06

CHECKED BY AND DATE
JUSTIN XING 11-01-06

APPROVED BY AND DATE
KING CHIU 11-01-06

THIRD ANGLE PROJECTION



SCALE:
1 : 1

SIZE: A3

240008

TITLE

103 SERIES
D-SUB IDC TYPE

DRAWING NO.

103-XX1X2X021

REV
A

FILE NO.

SHEET 1 OF 1

DO NOT SCALE DRAWING