

Material
 Insulator : Glass-Filled Thermoplastic PBT, UL94V-0
 Contact : Brass
 Shell : Steel, 100u" Tin Over 50u" min Copper
 Clinch Nut : Brass, Nickel Plated
 Screwlock : Brass, Nickel Plated



Electrical
 Contact Resistance : 20 milliohms Max at 1 AMP DC.
 Insulation Resistance : 1000 megohms at 500 VDC
 Dielectric Withstanding Voltage :1000 VAC/rms 60Hz for 1 minute
 Current Rating : 3 AMP
 Volatge Rating : 250 VAC/rms 60Hz

ORDER INFORMATION

V	IDC	X	1	X	-	X	XX	X	X
IDC Type		P.B.T		M: MALE F: Female		1: Metal S/R 2: Plastic S/R 3: W/O S/R		0: Ø3.05mm clear hole 1: #4-40 Threaded Hole 2: M3 Threaded Hole 3: #4-40 Threaded Hole with #4-40 screwlock 4: #4-40 Threaded Hole with M3 screwlock Other options, please check with Morecrafts	
S0:Selective Flash S1:Selective 3u" S2:Selective 5u" S3:Selective 10u" S4:Selective 15u" S5:Selective 30u"		A: with insulator support B: w/o insulator support		No. of Contacts					

Dimensions



Positions	A	B	C	D	E	F	G±0.5
9	30.81	24.99	16.92	16.33	11.08	10.16	19.80
15	39.20	33.30	25.25	24.66	19.39	17.78	28.10
25	53.05	47.04	38.96	38.38	33.24	30.48	41.85
37	69.40	63.50	55.42	54.84	49.86	45.72	58.40

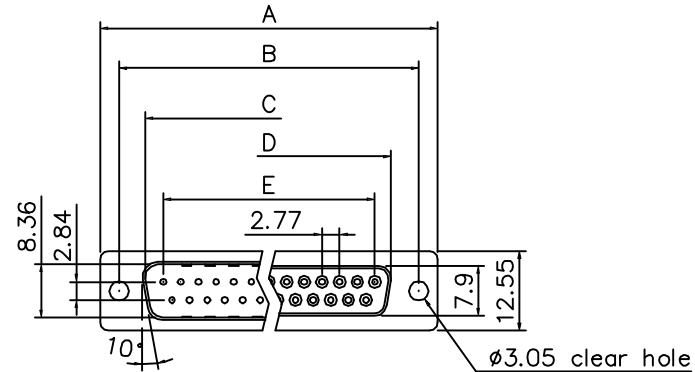


Cover




Strain Relief

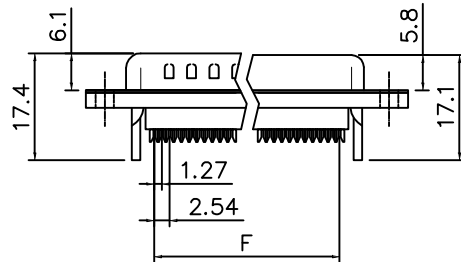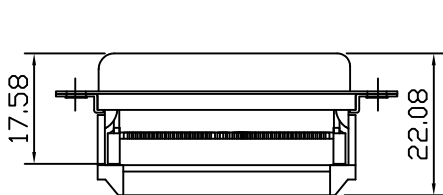

With Insulator Support

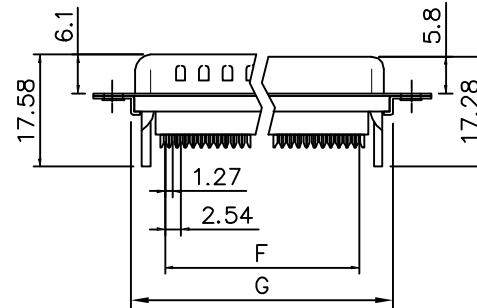

Without Insulator Support



			TITLE: D-SUB IDC TYPE	REV. A	PART NO.	VIDCX1X-XXXXX	DATE	2008/01/12		
					DRAWING NO.	VIDCX1X-XXXXX	DRAWN	Andrew		
					CUSTOMER P/N		APPROVED	Brian		
REV.	DESCRIPTION	DATE			TOLERANCE	.X ±0.25 .XX ±0.20	SCALE	1:1	UNIT	mm

RoHS