
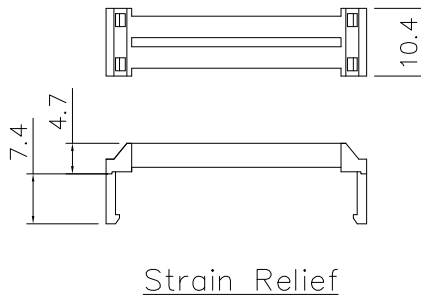
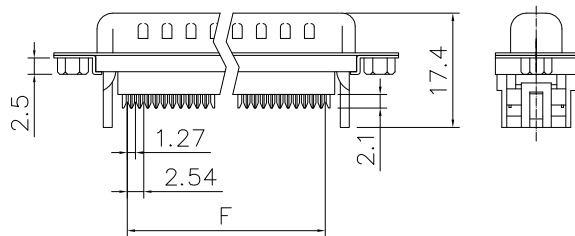



This document is the property of Amphenol Corporation and is delivered on the express condition that it is not to be disclosed, reproduced or used, in whole or in part, for manufacture or sale by anyone other than Amphenol Corporation without its prior consent, & that no right is granted to disclose or to use any information in this document.

Customer drawing

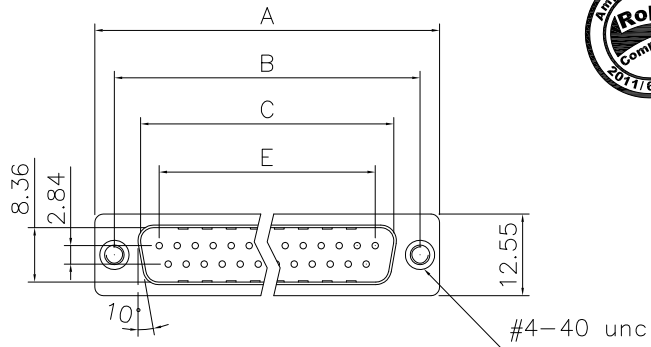

Dimensions

Shell Size	Positions	A	B	C	E	F
E	9	30.81	24.99	16.92	11.08	10.16
A	15	39.20	33.30	25.25	19.39	17.78
B	25	53.05	47.04	38.96	33.24	30.48
C	37	69.40	63.50	55.42	49.86	45.72

REVISIONS				
SYM	ECN	DESCRIPTION	DATE	APPROVED
1	HK--	First Release Drawing	01/12/21	IP

D-SUB TECHNICAL DATA

SHELL : Steel, 100u" Tin over 50u" min nickel
over 50u" min Copper

BODY : PBT, UL94 V-0, Color Black

CONTACTS : Copper alloy
30u" gold over 50u" min nickel on mating area
100u" min tin over 50u" min nickel on termination area

REAR NUT : Brass, Nickel Plated.

ELECTRICAL : Voltage rating 250 VAC/Rms 60Hz
Current Rating 3 AMP
Withstanding Voltage >1000 VAC Rms
Insulation resistance >1000 M Ohms
Contact resistance 20 mOhms max

MARKING : Amphenol...(Series No.)
Commercial reference
Manufacturing date

PRODUCT CODE

L 17D X FR D A XX P C309

L: RoHS Compliance

17D: Flash gold contact plating

Shell Size: E, A, B, C

Flat ribbon cable type

D = rear insert 4-40

C309=30u" gold plating

Contact type:
P=Pin

Configuration:
09, 15, 25, 37

Type:
A=Front metal shell

UNLESS OTHERWISE SPECIFIED TOLERANCES	APPROVAL		DATE
	DRAWN	Jon. Luo	01/12/21
	CHECKED	Tony. Tang	01/12/21
	CHECKED		
FOR MATERIALS AND FINISHES SEE NOTES	DRAWING FILE :		
	ANGLE OF PROJECTION		
	DIMENSIONS		
	U.S.	INCHES	
REMOVE SHARP EDGES	METRIC		
	MM		

Amphenol		
TITLE		
D-SUB Flat ribbon cable type		
SIZE	DRAWING NO.	REV.
A4	L17DXFRDAXXPC309	1
SCALE	NONE	SHEET 1 OF 1