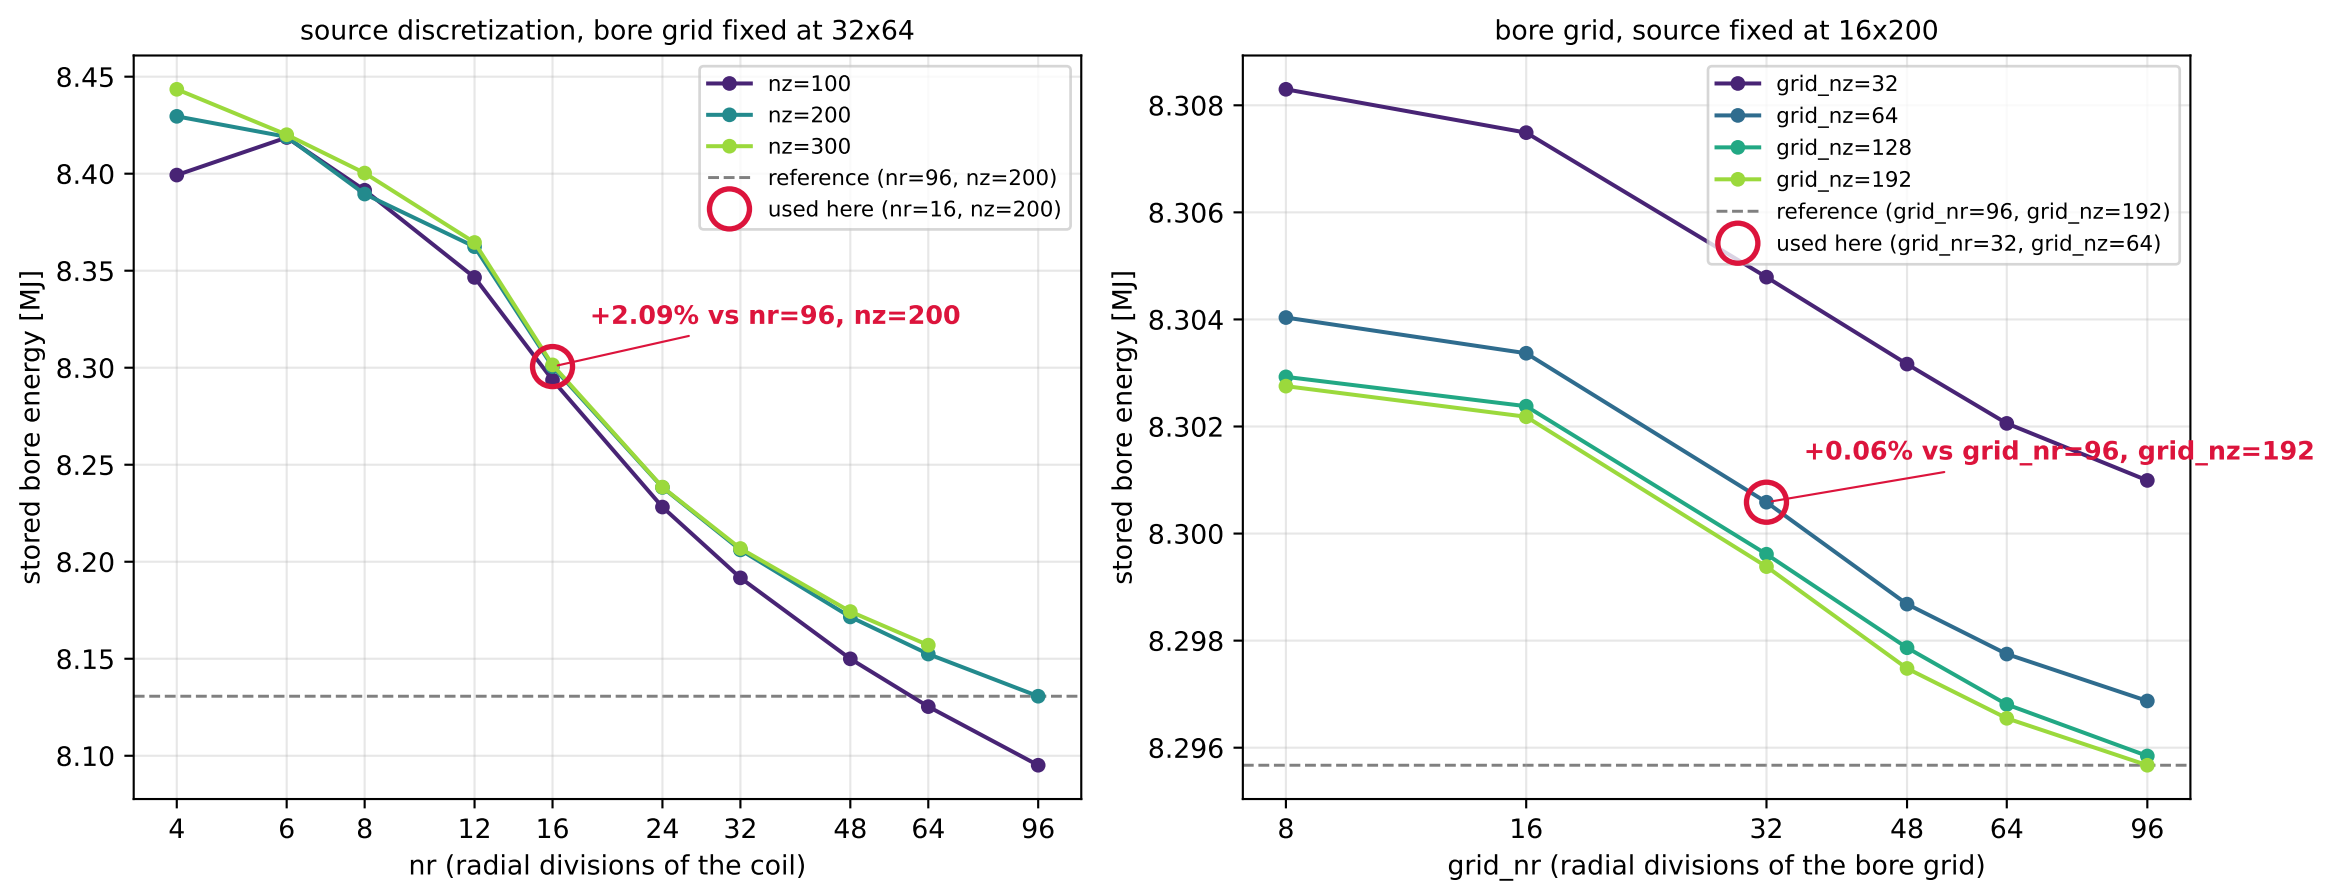
source discretization, bore grid fixed at 32x64
nz=100
nz=200
nz=300
reference (nr=96, nz=200)
used here (nr=16, nz=200)
+2.09% vs nr=96, nz=200
stored bore energy [MJ]
nr (radial divisions of the coil)
bore grid, source fixed at 16x200
grid_nz=32
grid_nz=64
grid_nz=128
grid_nz=192
reference (grid_nr=96, grid_nz=192)
used here (grid_nr=32, grid_nz=64)
+0.06% vs grid_nr=96, grid_nz=192
stored bore energy [MJ]
grid_nr (radial divisions of the bore grid)