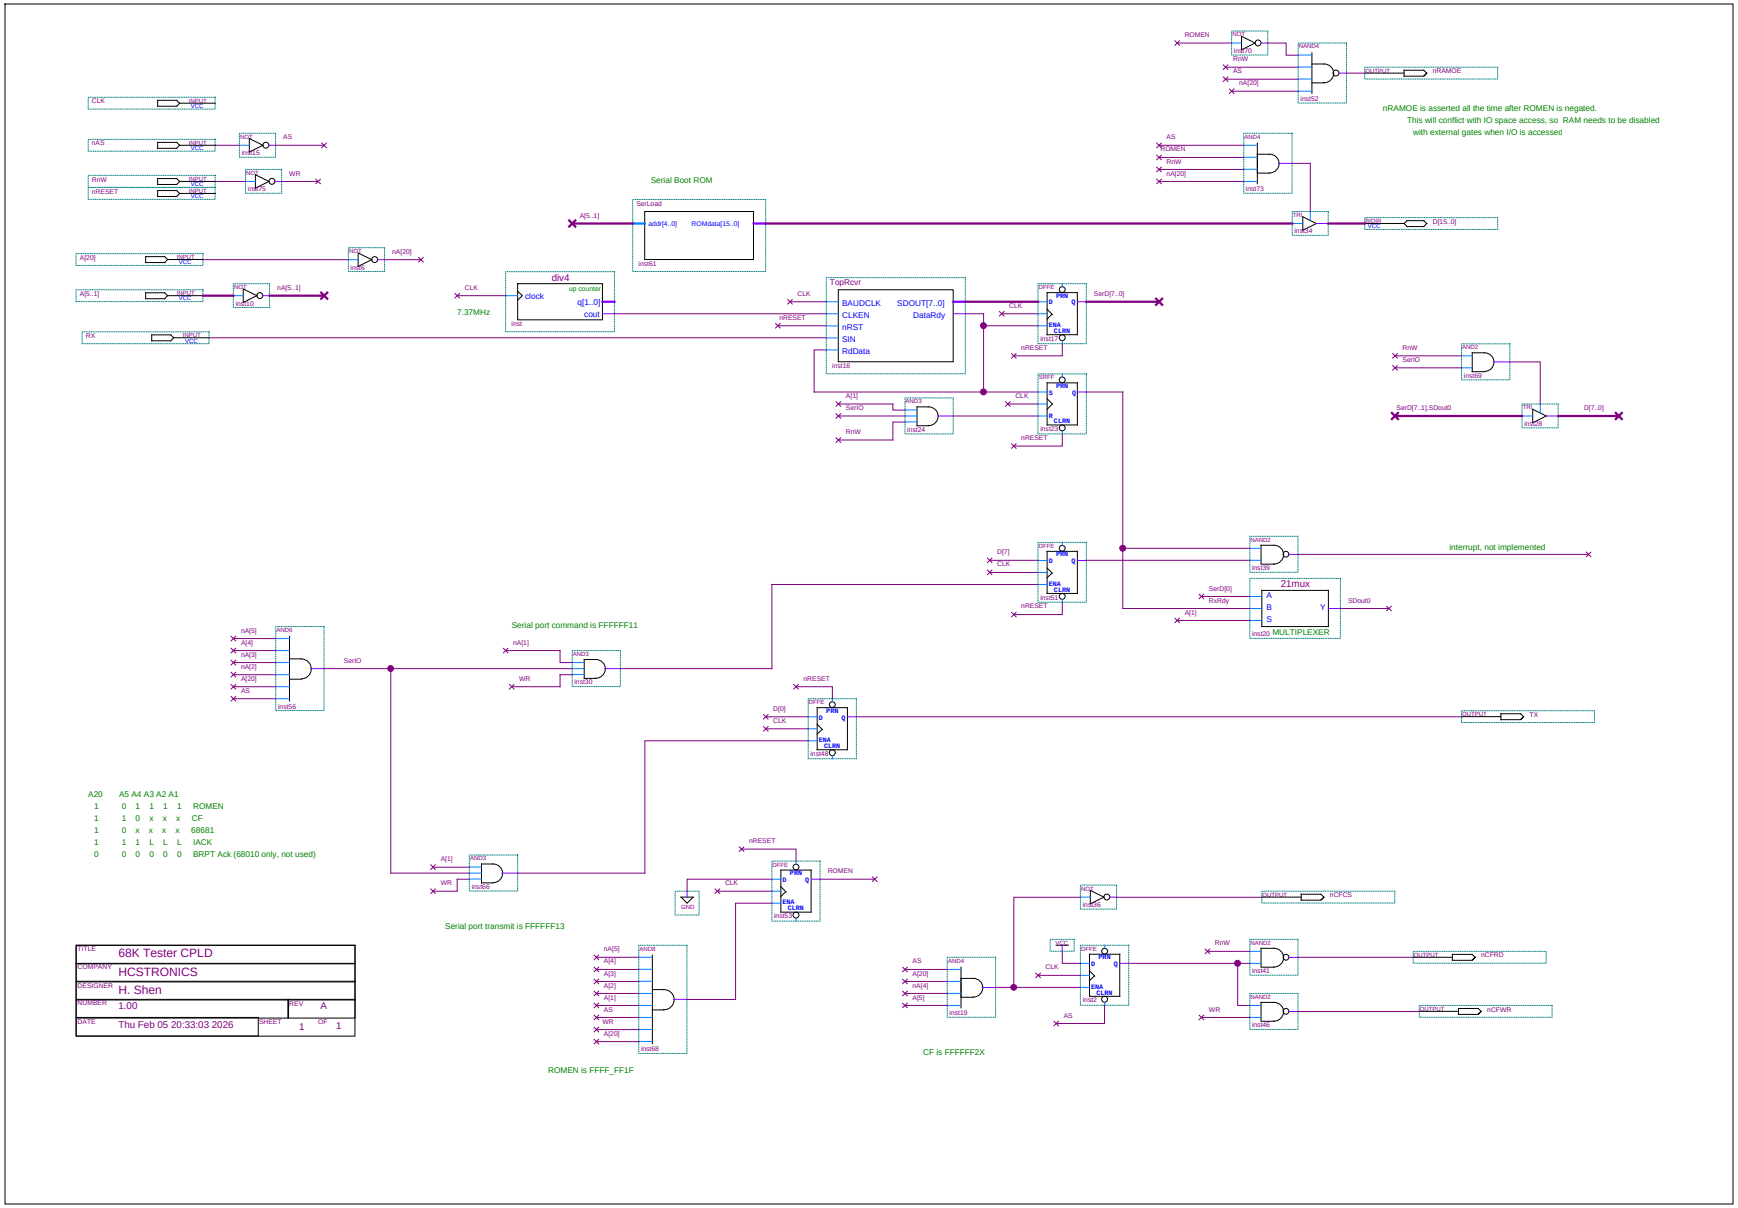
nRAMOE is asserted all the time after ROMEN is negated.
This will conflict with IO space access, so RAM needs to be disabled with external gates when I/O is accessed
Serial Boot ROM
7.37MHz
interrupt, not implemented
Serial port command is FFFFFF11
Serial port transmit is FFFFFF13
ROMEN is FFFF_FF1F
CF is FFFFFF2X
A20 A5 A4 A3 A2 A1
1 0 1 1 1 1 ROMEN
1 1 0 x x x CF
1 0 x x x x 68681
1 1 1 L L L IACK
0 0 0 0 0 0 BRPT Ack (68010 only, not used)
TITLE 68K Tester CPLD
COMPANY HCSTRONICS
DESIGNER H. Shen
NUMBER 1.00
REV A
DATE Thu Feb 05 20:33:03 2026
SHEET 1 OF 1