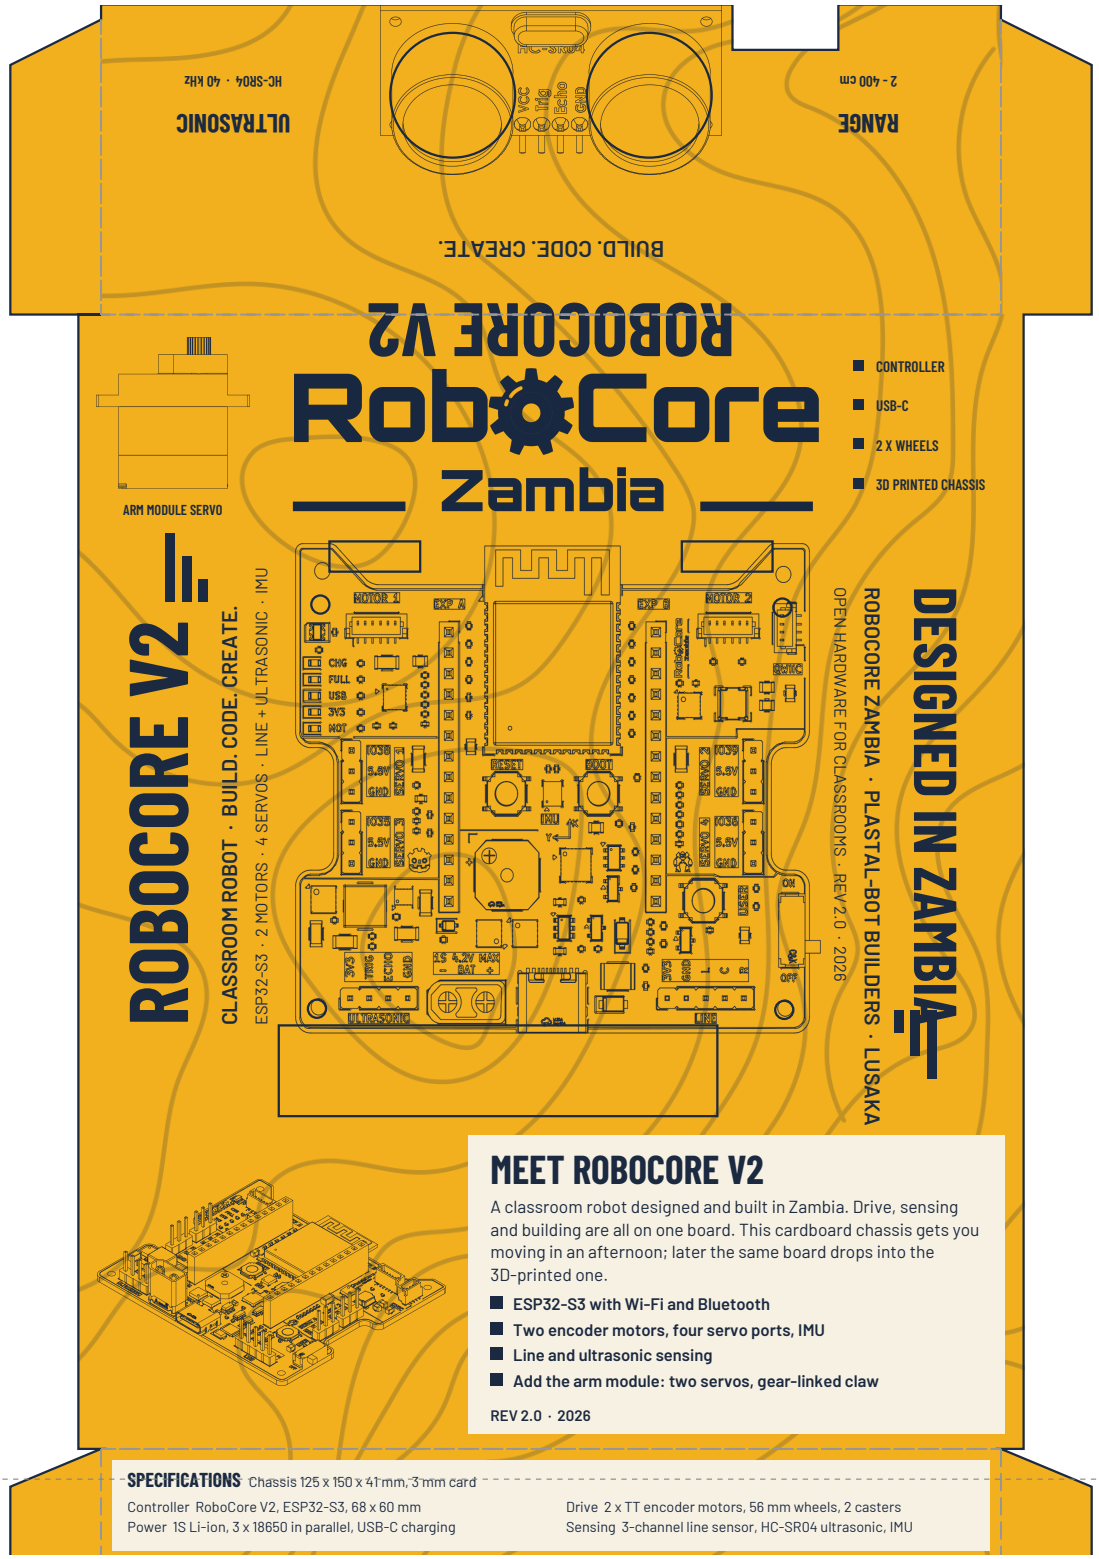


RoboCore V2 cardboard chassis, branded print, tile 1 of 2 at 1:1. Overlap the tiles 10 mm at the grey dotted line.

100 mm

SPECIFICATIONS Chassis 125 x 150 x 41 mm, 3 mm card

Controller RoboCore V2, ESP32-S3, 68 x 60 mm
Power 1S Li-ion, 3 x 18650 in parallel, USB-C charging
Drive 2 x TT encoder motors, 56 mm wheels, 2 casters
Sensing 3-channel line sensor, HC-SR04 ultrasonic, IMU

DOCS & CODE


PLASTAL-BOT BUILDERS

DESIGNED IN ZAMBIA
RoboCore Zambia · Lusaka
plastalbotbuilders.com

ROBOCORE V2

CLASSROOM ROBOT · REV 2.0

DESIGNED IN ZAMBIA

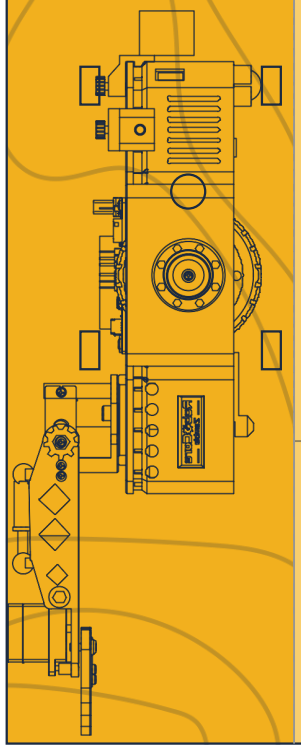

WHAT IT CARRIES


CASTER




CONTROLLER



LINE SENSOR




ULTRASONIC



SERVO (ARM MODULE)


CASTER

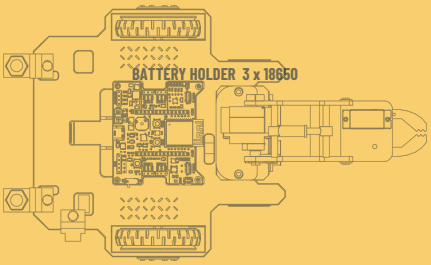

BATTERY HOLDER 3 x 18650

MOTOR


MOTOR

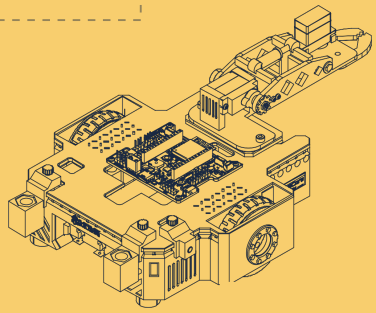

HOW TO BUILD

1 Cut the solid lines, score the folds.
2 Fold up the side walls, then the rear wall; glue its tabs.
3 Motors through the shaft holes, zip-tied; wheels on.
4 Battery holder in from the back; casters on.
5 Deck over, front flap down; glue its tabs.
6 Controller on the deck, leads up through the slots.
7 HC-SR04 behind the flap, line sensor under the nose.

Keep metal 15 mm from the antenna. Not for under 8s.




LINE SENSOR UNDERNEATH

ROBOCORE V2

CLASSROOM ROBOT · REV 2.0

DESIGNED IN ZAMBIA

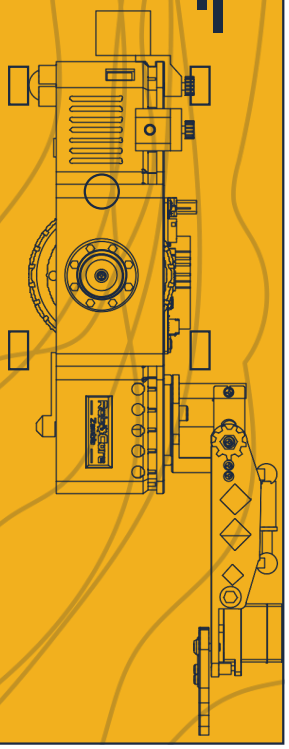

RoboCore V2 cardboard chassis, branded print, tile 2 of 2 at 1:1. Overlap the tiles 10 mm at the grey dotted line.

100 mm