# Main technical parameters of temperature measuring thermistor

| P/N | MF52A$_1$503F3950 |
|---|---|
| Product Standards | Q/320115SHD03-2011 |

## 1. Dimension

(Unit:mm)

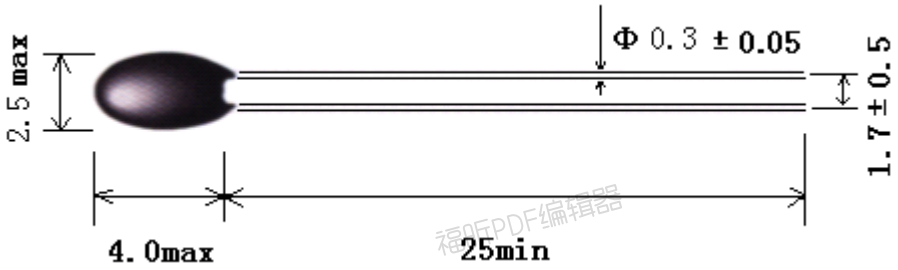


## 2. Material

| Encapsulation material | Color | Wire material |
|---|---|---|
| Modified resin | Black | Tinned steel wire |

## 3. Model Description

| MF52 | A$_1$ | 503 | F | 3950 |
|---|---|---|---|---|
| NTC Thermistor | Leads are tinned steel wires | resistance | Resistance tolerance | B value (25/50) |
| | | 50×10$^3$=50KΩ | ±1% | 3950K |

## 4. Electrical performance

| | Parameter | Symbol | Test Condition | Unit | Performance requirement |
|---|---|---|---|---|---|
| 4.1 | Zero power resistance at 25 ℃ | $R_{25}$ | Ta=25±0.05℃ Test power≤0.1mW Test in flowing liquids | KΩ | 50±1% |
| 4.2 | B value | $B_{25/50}$ | $B=[(T_a \times T_b)/(T_b-T_a)] \times \ln(R_a/R_b)$ $T_b$=50℃±0.1℃ | K | 3950±1% |
| 4.3 | Dissipation factor | δ | In still air | mW/℃ | ≥2 |
| 4.4 | Time constant | τ | In still air | sec | ≤7 |
| 4.5 | Insulation resistance | / | 100V/DC 1min | MΩ | ≥100 |
| 4.6 | Working temperature range | / | / | ℃ | -55 ~ 125 |
| 4.7 | Resistance temperature characteristic | / | / | / | See Schedule 1 |
| 4.8 | Resistance error | / | / | / | See Schedule 1 |

福昕PDF编辑器

## 5. Reliable performance test

| | Item | Test conditions and methods | Skills requirement |
|---|---|---|---|
| 5.1 | Solderability | The lead is immersed in a tin bath of 235 ± 5 ℃, the tin surface is 6mm away from the lower end of the body, and the time is 2-3 seconds. | The coating of solder on the surface of the lead immersion part is even and smooth, and the area is above 95%. |
| 5.2 | Resistance to welding heat | The lead is immersed in a tin bath of 265 ± 5 ℃, the liquid level is 6mm from the resistor, and the time is 5 ± 1 second. | No visible damage, R25ΔR / R≤ ± 2% |
| 5.3 | Terminal strength | Pull force: 5N, time: 10 seconds | No visible damage, R25ΔR / R≤ ± 2% |
| 5.4 | Rapid temperature change | -55 ℃ 30min → 25 ℃ 5min → 125 ℃ 30min → 25 ℃ 5min, repeated 5 times, recovery 4 hours | No visible damage, R25ΔR / R≤ ± 2% |
| 5.5 | High temperature | Temperature: 125 ° C, Time: 16 hours | No visible damage, R25ΔR / R≤ ± 2% |
| 5.6 | Cold | Temperature: -55 ° C, time: 2 hours | No visible damage, R25ΔR / R≤ ± 2% |
| 5.7 | Low pressure | Air pressure: 40 ± 0.1Kpa, time: 4 hours | No visible damage, R25ΔR / R≤ ± 2% |
| 5.8 | Steady-state warming | Temperature: 40 ° C, humidity: 93%, time: 500 ± 12 hours | No visible damage, R25ΔR / R≤ ± 2%, Withstand voltage ≥700V / AC1min Insulation resistance≥100MΩ |
| 5.9 | Alternating Damp Heat | Temperature: 25 ~ 40 ℃, humidity: 90%, time: 24 hours | No visible damage, R25ΔR / R≤ ± 2%, Withstand voltage ≥700V / AC 1min Insulation resistance ≥100MΩ |
| 5.10 | Endurance with zero power consumption at the upper category temperature | Temperature: 125 ℃ ± 2 ℃, time: 1000 ± 24 hours | No visible damage, R25ΔR / R≤ ± 2% |
| 5.11 | Vibration | Frequency range: 10 ~ 500HZ, amplitude: 0.75mm or 98m / S2, time: 2 hours | No visible damage, R25ΔR / R≤ ± 2% |
| 5.12 | Collision | Acceleration: 250m / S2, Pulse duration: 6mS, Number of collisions: 4000 times | No visibledamage, R25ΔR / R≤ ± 2% |

## 6. Welding condition

When welding, the welding point should be at least 6mm away from the root of the resistor body, the welding temperature should be lower than 350 ℃, and the welding time should be as short as possible.

## 7. Storage condition

7.1 Storage temperature:-10℃ ～ 40℃;
7.2 Storage humidity: ≤75% RH;
7.3 Avoid storing in the environment with corrosive gas and light;
7.4 After opening the package, it needs to be resealed and stored.

福昕PDF编辑器

Schedule 1

# Temperature characteristics table

R25=50KΩ Precision:±1% B25/50=3950K B25/85=4091K Precision:±1%(P182-6B)

| Temperature (℃) | Resistance(KΩ) | | | Resistance accuracy(%) | | Temperature accuracy (℃) | |
|---|---|---|---|---|---|---|---|
| | Min value | Typical value | Max value | △R | -△R | △T | -△T |
| -55 | 5141.870 | 5443.210 | 5761.630 | 5.849 | -5.535 | 0.730 | -0.690 |
| -54 | 4683.870 | 4953.700 | 5238.540 | 5.750 | -5.446 | 0.726 | -0.688 |
| -53 | 4275.410 | 4517.540 | 4772.900 | 5.652 | -5.359 | 0.722 | -0.685 |
| -52 | 3910.210 | 4127.930 | 4357.340 | 5.557 | -5.274 | 0.719 | -0.682 |
| -51 | 3582.900 | 3779.060 | 3985.560 | 5.464 | -5.190 | 0.715 | -0.679 |
| -50 | 3288.860 | 3465.930 | 3652.150 | 5.373 | -5.108 | 0.711 | -0.676 |
| -49 | 3024.120 | 3184.230 | 3352.480 | 5.283 | -5.028 | 0.707 | -0.673 |
| -48 | 2785.240 | 2930.270 | 3082.540 | 5.196 | -4.949 | 0.703 | -0.670 |
| -47 | 2569.250 | 2700.830 | 2838.860 | 5.110 | -4.871 | 0.699 | -0.666 |
| -46 | 2373.560 | 2493.110 | 2618.430 | 5.026 | -4.795 | 0.695 | -0.663 |
| -45 | 2195.910 | 2304.710 | 2418.650 | 4.944 | -4.720 | 0.691 | -0.660 |
| -44 | 2034.340 | 2133.490 | 2237.240 | 4.863 | -4.647 | 0.687 | -0.656 |
| -43 | 1887.140 | 1977.610 | 2072.210 | 4.783 | -4.574 | 0.682 | -0.652 |
| -42 | 1752.780 | 1835.440 | 1921.810 | 4.705 | -4.503 | 0.678 | -0.649 |
| -41 | 1629.960 | 1705.570 | 1784.510 | 4.628 | -4.433 | 0.673 | -0.645 |
| -40 | 1517.480 | 1586.730 | 1658.980 | 4.553 | -4.364 | 0.669 | -0.641 |
| -39 | 1414.330 | 1477.820 | 1544.010 | 4.478 | -4.296 | 0.664 | -0.637 |
| -38 | 1319.580 | 1377.860 | 1438.560 | 4.405 | -4.229 | 0.660 | -0.633 |
| -37 | 1232.430 | 1285.970 | 1341.700 | 4.333 | -4.163 | 0.655 | -0.629 |
| -36 | 1152.160 | 1201.390 | 1252.600 | 4.262 | -4.097 | 0.650 | -0.625 |
| -35 | 1078.120 | 1123.430 | 1170.530 | 4.192 | -4.033 | 0.645 | -0.621 |
| -34 | 1009.740 | 1051.480 | 1094.840 | 4.123 | -3.970 | 0.640 | -0.616 |
| -33 | 946.508 | 984.995 | 1024.940 | 4.055 | -3.907 | 0.635 | -0.612 |
| -32 | 887.968 | 923.478 | 960.312 | 3.988 | -3.845 | 0.630 | -0.607 |
| -31 | 833.707 | 866.495 | 900.483 | 3.922 | -3.784 | 0.625 | -0.603 |
| -30 | 783.357 | 813.653 | 845.036 | 3.857 | -3.723 | 0.620 | -0.598 |
| -29 | 736.585 | 764.597 | 793.594 | 3.792 | -3.663 | 0.614 | -0.593 |
| -28 | 693.092 | 719.007 | 745.817 | 3.728 | -3.604 | 0.609 | -0.589 |
| -27 | 652.607 | 676.598 | 701.399 | 3.665 | -3.545 | 0.604 | -0.584 |
| -26 | 614.887 | 637.107 | 660.064 | 3.603 | -3.487 | 0.598 | -0.579 |
| -25 | 579.708 | 600.300 | 621.560 | 3.541 | -3.430 | 0.593 | -0.574 |
| -24 | 546.871 | 565.962 | 585.662 | 3.480 | -3.373 | 0.587 | -0.569 |
| -23 | 516.192 | 533.901 | 552.163 | 3.420 | -3.316 | 0.581 | -0.564 |
| -22 | 487.506 | 503.941 | 520.877 | 3.360 | -3.261 | 0.575 | -0.558 |
| -21 | 460.663 | 475.920 | 491.632 | 3.301 | -3.205 | 0.570 | -0.553 |
| -20 | 435.523 | 449.692 | 464.276 | 3.243 | -3.150 | 0.564 | -0.548 |
| -19 | 411.961 | 425.125 | 438.665 | 3.185 | -3.096 | 0.558 | -0.542 |
| -18 | 389.862 | 402.096 | 414.672 | 3.127 | -3.042 | 0.552 | -0.537 |
| -17 | 369.121 | 380.494 | 392.177 | 3.070 | -2.988 | 0.545 | -0.531 |

福昕PDF编辑器

# Temperature characteristics table

R25=50KΩ Precision:±1% B25/50=3950K B25/85=4091K Precision:±1%(P182-6B)

| Temperature (℃) | Resistance(KΩ) | | | Resistance accuracy(%) | | Temperature accuracy (℃) | |
|---|---|---|---|---|---|---|---|
| | Min value | Typical value | Max value | △R | -△R | △T | -△T |
| -16 | 349.641 | 360.216 | 371.074 | 3.014 | -2.935 | 0.539 | -0.525 |
| -15 | 331.333 | 341.169 | 351.262 | 2.958 | -2.883 | 0.533 | -0.519 |
| -14 | 314.116 | 323.267 | 332.651 | 2.902 | -2.830 | 0.527 | -0.514 |
| -13 | 297.916 | 306.431 | 315.157 | 2.847 | -2.778 | 0.520 | -0.508 |
| -12 | 282.663 | 290.587 | 298.704 | 2.793 | -2.727 | 0.514 | -0.502 |
| -11 | 268.293 | 275.669 | 283.220 | 2.739 | -2.675 | 0.507 | -0.496 |
| -10 | 254.748 | 261.615 | 268.640 | 2.685 | -2.624 | 0.501 | -0.489 |
| -9 | 241.975 | 248.368 | 254.905 | 2.631 | -2.574 | 0.494 | -0.483 |
| -8 | 229.922 | 235.875 | 241.958 | 2.579 | -2.523 | 0.487 | -0.477 |
| -7 | 218.544 | 224.087 | 229.749 | 2.526 | -2.473 | 0.481 | -0.471 |
| -6 | 207.797 | 212.960 | 218.229 | 2.474 | -2.424 | 0.474 | -0.464 |
| -5 | 197.642 | 202.450 | 207.354 | 2.422 | -2.374 | 0.467 | -0.458 |
| -4 | 188.042 | 192.520 | 197.084 | 2.370 | -2.325 | 0.460 | -0.451 |
| -3 | 178.963 | 183.133 | 187.381 | 2.319 | -2.276 | 0.453 | -0.444 |
| -2 | 170.373 | 174.256 | 178.210 | 2.268 | -2.228 | 0.446 | -0.438 |
| -1 | 162.242 | 165.858 | 169.537 | 2.218 | -2.180 | 0.439 | -0.431 |
| 0 | 154.543 | 157.910 | 161.333 | 2.168 | -2.131 | 0.431 | -0.424 |
| 1 | 147.249 | 150.384 | 153.569 | 2.118 | -2.084 | 0.424 | -0.417 |
| 2 | 140.338 | 143.256 | 146.219 | 2.068 | -2.036 | 0.417 | -0.410 |
| 3 | 133.786 | 136.502 | 139.258 | 2.019 | -1.989 | 0.409 | -0.403 |
| 4 | 127.573 | 130.100 | 132.663 | 1.970 | -1.942 | 0.402 | -0.396 |
| 5 | 121.679 | 124.030 | 126.413 | 1.921 | -1.895 | 0.394 | -0.389 |
| 6 | 116.086 | 118.272 | 120.488 | 1.873 | -1.848 | 0.387 | -0.381 |
| 7 | 110.777 | 112.810 | 114.869 | 1.825 | -1.802 | 0.379 | -0.374 |
| 8 | 105.735 | 107.625 | 109.538 | 1.777 | -1.756 | 0.371 | -0.367 |
| 9 | 100.947 | 102.703 | 104.480 | 1.729 | -1.710 | 0.363 | -0.359 |
| 10 | 96.402 | 98.034 | 99.683 | 1.682 | -1.664 | 0.355 | -0.352 |
| 11 | 92.074 | 93.589 | 95.119 | 1.635 | -1.618 | 0.348 | -0.344 |
| 12 | 87.964 | 89.370 | 90.789 | 1.588 | -1.573 | 0.340 | -0.336 |
| 13 | 84.055 | 85.359 | 86.675 | 1.541 | -1.528 | 0.331 | -0.329 |
| 14 | 80.337 | 81.547 | 82.766 | 1.495 | -1.483 | 0.323 | -0.321 |
| 15 | 76.800 | 77.921 | 79.050 | 1.449 | -1.438 | 0.315 | -0.313 |
| 16 | 73.434 | 74.472 | 75.517 | 1.403 | -1.393 | 0.307 | -0.305 |
| 17 | 70.230 | 71.191 | 72.157 | 1.357 | -1.349 | 0.299 | -0.297 |
| 18 | 67.179 | 68.068 | 68.961 | 1.312 | -1.304 | 0.290 | -0.289 |
| 19 | 64.274 | 65.095 | 65.919 | 1.266 | -1.260 | 0.282 | -0.280 |
| 20 | 61.507 | 62.264 | 63.025 | 1.221 | -1.216 | 0.273 | -0.272 |
| 21 | 58.870 | 59.568 | 60.270 | 1.177 | -1.173 | 0.265 | -0.264 |
| 22 | 56.357 | 57.001 | 57.646 | 1.132 | -1.129 | 0.256 | -0.256 |
| 23 | 53.961 | 54.554 | 55.147 | 1.088 | -1.086 | 0.247 | -0.247 |

福昕PDF编辑器

# Temperature characteristic stable

R25=50KΩ Precision:±1% B25/50=3950K B25/85=4091K Precision:±1%(P182-6B)

| Temperature (℃) | Resistance(KΩ) | | | Resistance accuracy(%) | | Temperature accuracy (℃) | |
|---|---|---|---|---|---|---|---|
| | Min value | Typical value | Max value | △R | -△R | △T | -△T |
| 24 | 51.677 | 52.222 | 52.767 | 1.043 | -1.043 | 0.239 | -0.239 |
| 25 | 49.500 | 50.000 | 50.500 | 1.000 | -1.000 | 0.230 | -0.230 |
| 26 | 47.381 | 47.880 | 48.380 | 1.043 | -1.042 | 0.241 | -0.241 |
| 27 | 45.362 | 45.860 | 46.358 | 1.087 | -1.085 | 0.253 | -0.252 |
| 28 | 43.437 | 43.932 | 44.429 | 1.130 | -1.127 | 0.264 | -0.264 |
| 29 | 41.601 | 42.094 | 42.588 | 1.173 | -1.170 | 0.276 | -0.275 |
| 30 | 39.850 | 40.339 | 40.830 | 1.217 | -1.212 | 0.288 | -0.287 |
| 31 | 38.180 | 38.665 | 39.152 | 1.259 | -1.254 | 0.299 | -0.298 |
| 32 | 36.586 | 37.067 | 37.550 | 1.302 | -1.295 | 0.311 | -0.310 |
| 33 | 35.066 | 35.541 | 36.019 | 1.345 | -1.337 | 0.323 | -0.321 |
| 34 | 33.614 | 34.084 | 34.557 | 1.387 | -1.378 | 0.335 | -0.333 |
| 35 | 32.228 | 32.692 | 33.160 | 1.430 | -1.419 | 0.347 | -0.345 |
| 36 | 30.905 | 31.363 | 31.825 | 1.472 | -1.460 | 0.360 | -0.357 |
| 37 | 29.641 | 30.093 | 30.549 | 1.514 | -1.501 | 0.372 | -0.369 |
| 38 | 28.434 | 28.879 | 29.329 | 1.555 | -1.541 | 0.384 | -0.381 |
| 39 | 27.281 | 27.720 | 28.162 | 1.597 | -1.582 | 0.396 | -0.393 |
| 40 | 26.179 | 26.611 | 27.047 | 1.639 | -1.622 | 0.409 | -0.405 |
| 41 | 25.126 | 25.551 | 25.980 | 1.680 | -1.662 | 0.421 | -0.417 |
| 42 | 24.119 | 24.537 | 24.959 | 1.721 | -1.702 | 0.434 | -0.429 |
| 43 | 23.157 | 23.567 | 23.983 | 1.762 | -1.741 | 0.447 | -0.442 |
| 44 | 22.237 | 22.640 | 23.048 | 1.803 | -1.781 | 0.460 | -0.454 |
| 45 | 21.357 | 21.753 | 22.154 | 1.844 | -1.820 | 0.472 | -0.466 |
| 46 | 20.515 | 20.904 | 21.298 | 1.884 | -1.859 | 0.485 | -0.479 |
| 47 | 19.710 | 20.091 | 20.478 | 1.925 | -1.898 | 0.498 | -0.491 |
| 48 | 18.939 | 19.314 | 19.693 | 1.965 | -1.937 | 0.511 | -0.504 |
| 49 | 18.202 | 18.569 | 18.941 | 2.005 | -1.975 | 0.525 | -0.517 |
| 50 | 17.579 | 17.940 | 18.306 | 2.040 | -2.009 | 0.539 | -0.531 |
| 51 | 16.821 | 17.173 | 17.531 | 2.085 | -2.052 | 0.551 | -0.542 |
| 52 | 16.174 | 16.519 | 16.870 | 2.124 | -2.090 | 0.564 | -0.555 |
| 53 | 15.555 | 15.893 | 16.237 | 2.164 | -2.128 | 0.578 | -0.568 |
| 54 | 14.962 | 15.293 | 15.630 | 2.203 | -2.165 | 0.591 | -0.581 |
| 55 | 14.393 | 14.718 | 15.048 | 2.242 | -2.203 | 0.605 | -0.594 |
| 56 | 13.849 | 14.167 | 14.490 | 2.281 | -2.240 | 0.619 | -0.608 |
| 57 | 13.328 | 13.638 | 13.955 | 2.320 | -2.277 | 0.632 | -0.621 |
| 58 | 12.828 | 13.132 | 13.442 | 2.359 | -2.314 | 0.646 | -0.634 |
| 59 | 12.349 | 12.646 | 12.949 | 2.397 | -2.351 | 0.660 | -0.647 |
| 60 | 11.889 | 12.180 | 12.477 | 2.436 | -2.388 | 0.674 | -0.661 |
| 61 | 11.449 | 11.734 | 12.024 | 2.474 | -2.424 | 0.688 | -0.674 |
| 62 | 11.027 | 11.305 | 11.589 | 2.512 | -2.460 | 0.702 | -0.688 |

福昕PDF编辑器

# Temperature characteristic stable

R25=50KΩ Precision: ±1% B25/50=3950K B25/85=4091K Precision: ±1%(P182-6B)

| Temperature (℃) | Resistance(KΩ) | | | Resistance accuracy(%) | | Temperature accuracy (℃) | |
|---|---|---|---|---|---|---|---|
| | Min value | Typical value | Max value | △R | -△R | △T | -△T |
| 63 | 10.622 | 10.894 | 11.172 | 2.550 | -2.497 | 0.717 | -0.702 |
| 64 | 10.234 | 10.500 | 10.771 | 2.588 | -2.533 | 0.731 | -0.715 |
| 65 | 9.861 | 10.121 | 10.387 | 2.626 | -2.568 | 0.745 | -0.729 |
| 66 | 9.504 | 9.758 | 10.018 | 2.663 | -2.604 | 0.760 | -0.743 |
| 67 | 9.160 | 9.409 | 9.663 | 2.701 | -2.639 | 0.774 | -0.757 |
| 68 | 8.831 | 9.074 | 9.322 | 2.738 | -2.675 | 0.789 | -0.771 |
| 69 | 8.515 | 8.752 | 8.995 | 2.775 | -2.710 | 0.804 | -0.785 |
| 70 | 8.212 | 8.443 | 8.681 | 2.812 | -2.745 | 0.818 | -0.799 |
| 71 | 7.920 | 8.147 | 8.379 | 2.849 | -2.779 | 0.833 | -0.813 |
| 72 | 7.641 | 7.862 | 8.089 | 2.885 | -2.814 | 0.848 | -0.827 |
| 73 | 7.372 | 7.588 | 7.810 | 2.922 | -2.849 | 0.863 | -0.842 |
| 74 | 7.114 | 7.325 | 7.542 | 2.958 | -2.883 | 0.878 | -0.856 |
| 75 | 6.866 | 7.072 | 7.284 | 2.994 | -2.917 | 0.894 | -0.870 |
| 76 | 6.627 | 6.829 | 7.036 | 3.030 | -2.951 | 0.909 | -0.885 |
| 77 | 6.398 | 6.595 | 6.797 | 3.066 | -2.985 | 0.924 | -0.899 |
| 78 | 6.178 | 6.370 | 6.568 | 3.102 | -3.018 | 0.939 | -0.914 |
| 79 | 5.966 | 6.154 | 6.347 | 3.138 | -3.052 | 0.955 | -0.929 |
| 80 | 5.763 | 5.946 | 6.135 | 3.173 | -3.085 | 0.970 | -0.944 |
| 81 | 5.567 | 5.746 | 5.931 | 3.208 | -3.118 | 0.986 | -0.958 |
| 82 | 5.379 | 5.554 | 5.734 | 3.243 | -3.151 | 1.002 | -0.973 |
| 83 | 5.198 | 5.369 | 5.545 | 3.278 | -3.184 | 1.018 | -0.988 |
| 84 | 5.024 | 5.191 | 5.363 | 3.313 | -3.217 | 1.033 | -1.003 |
| 85 | 4.856 | 5.020 | 5.188 | 3.348 | -3.249 | 1.049 | -1.018 |
| 86 | 4.695 | 4.854 | 5.019 | 3.383 | -3.281 | 1.065 | -1.034 |
| 87 | 4.540 | 4.696 | 4.856 | 3.417 | -3.314 | 1.082 | -1.049 |
| 88 | 4.391 | 4.543 | 4.699 | 3.451 | -3.346 | 1.098 | -1.064 |
| 89 | 4.247 | 4.395 | 4.549 | 3.485 | -3.378 | 1.114 | -1.080 |
| 90 | 4.108 | 4.253 | 4.403 | 3.519 | -3.409 | 1.130 | -1.095 |
| 91 | 3.975 | 4.117 | 4.263 | 3.553 | -3.441 | 1.147 | -1.111 |
| 92 | 3.847 | 3.985 | 4.128 | 3.587 | -3.472 | 1.163 | -1.126 |
| 93 | 3.723 | 3.858 | 3.998 | 3.620 | -3.503 | 1.180 | -1.142 |
| 94 | 3.604 | 3.736 | 3.873 | 3.654 | -3.534 | 1.196 | -1.157 |
| 95 | 3.489 | 3.618 | 3.752 | 3.687 | -3.565 | 1.213 | -1.173 |
| 96 | 3.379 | 3.505 | 3.635 | 3.720 | -3.596 | 1.230 | -1.189 |
| 97 | 3.272 | 3.395 | 3.523 | 3.753 | -3.627 | 1.247 | -1.205 |
| 98 | 3.169 | 3.290 | 3.414 | 3.786 | -3.657 | 1.264 | -1.221 |
| 99 | 3.070 | 3.188 | 3.309 | 3.818 | -3.687 | 1.281 | -1.237 |
| 100 | 2.975 | 3.090 | 3.209 | 3.851 | -3.718 | 1.298 | -1.253 |
| 101 | 2.883 | 2.995 | 3.111 | 3.883 | -3.747 | 1.315 | -1.269 |
| 102 | 2.794 | 2.903 | 3.017 | 3.915 | -3.777 | 1.333 | -1.286 |

福昕PDF编辑器

# Temperature characteristic stable

R25=50KΩ Precision: ±1% B25/50=3950K B25/85=4091K Precision: ±1%(P182-6B)

| Temperature (℃) | Resistance (KΩ) | | | Resistance accuracy(%) | | Temperature accuracy (℃) | |
|---|---|---|---|---|---|---|---|
| | Min value | Typical value | Max value | △R | -△R | △T | -△T |
| 103 | 2.708 | 2.815 | 2.926 | 3.947 | -3.807 | 1.350 | -1.302 |
| 104 | 2.625 | 2.730 | 2.839 | 3.979 | -3.836 | 1.367 | -1.318 |
| 105 | 2.546 | 2.648 | 2.754 | 4.011 | -3.866 | 1.385 | -1.335 |
| 106 | 2.469 | 2.569 | 2.673 | 4.043 | -3.895 | 1.402 | -1.351 |
| 107 | 2.394 | 2.492 | 2.594 | 4.074 | -3.924 | 1.420 | -1.368 |
| 108 | 2.323 | 2.418 | 2.518 | 4.105 | -3.953 | 1.438 | -1.385 |
| 109 | 2.253 | 2.347 | 2.444 | 4.137 | -3.982 | 1.456 | -1.401 |
| 110 | 2.187 | 2.278 | 2.373 | 4.168 | -4.010 | 1.474 | -1.418 |
| 111 | 2.122 | 2.211 | 2.304 | 4.198 | -4.039 | 1.492 | -1.435 |
| 112 | 2.060 | 2.147 | 2.238 | 4.229 | -4.067 | 1.510 | -1.452 |
| 113 | 2.000 | 2.085 | 2.174 | 4.260 | -4.095 | 1.528 | -1.469 |
| 114 | 1.941 | 2.025 | 2.112 | 4.290 | -4.123 | 1.546 | -1.486 |
| 115 | 1.885 | 1.967 | 2.052 | 4.321 | -4.151 | 1.564 | -1.503 |
| 116 | 1.831 | 1.911 | 1.994 | 4.351 | -4.179 | 1.583 | -1.520 |
| 117 | 1.779 | 1.857 | 1.938 | 4.381 | -4.206 | 1.601 | -1.538 |
| 118 | 1.728 | 1.804 | 1.884 | 4.411 | -4.234 | 1.620 | -1.555 |
| 119 | 1.679 | 1.754 | 1.831 | 4.440 | -4.261 | 1.638 | -1.572 |
| 120 | 1.631 | 1.705 | 1.781 | 4.470 | -4.288 | 1.657 | -1.590 |
| 121 | 1.586 | 1.657 | 1.732 | 4.499 | -4.315 | 1.676 | -1.607 |
| 122 | 1.541 | 1.611 | 1.684 | 4.529 | -4.342 | 1.695 | -1.625 |
| 123 | 1.498 | 1.567 | 1.638 | 4.558 | -4.369 | 1.714 | -1.643 |
| 124 | 1.457 | 1.524 | 1.594 | 4.587 | -4.395 | 1.733 | -1.660 |
| 125 | 1.417 | 1.482 | 1.551 | 4.616 | -4.422 | 1.752 | -1.678 |

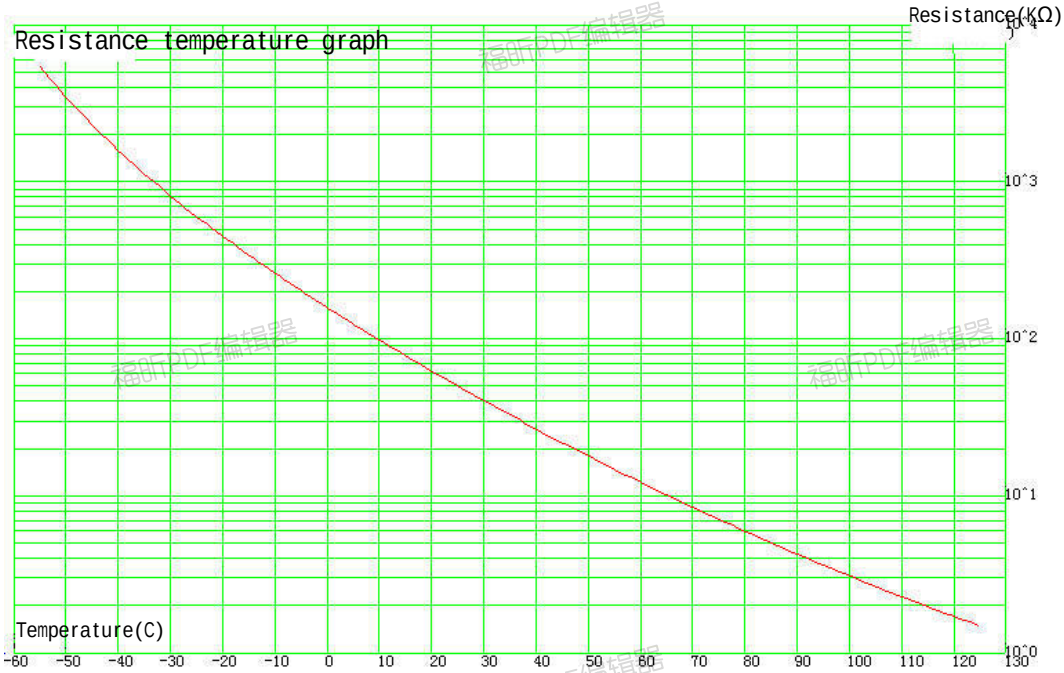


福昕PDF编辑器

Schedule 2

# Resistance error curve

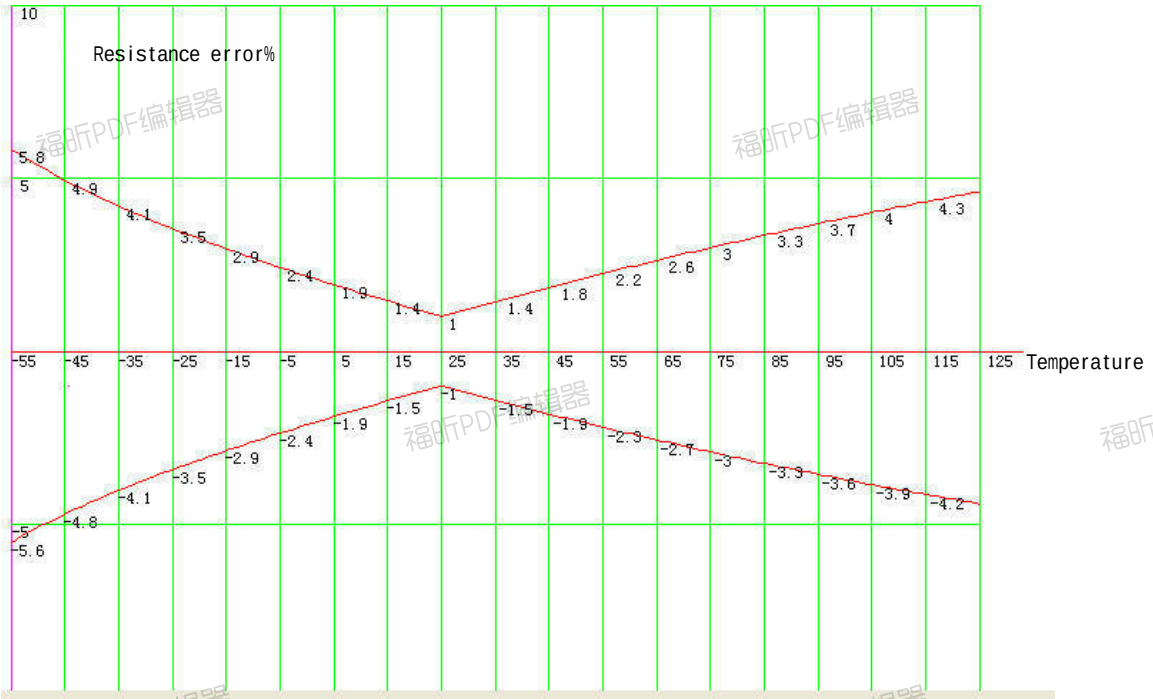


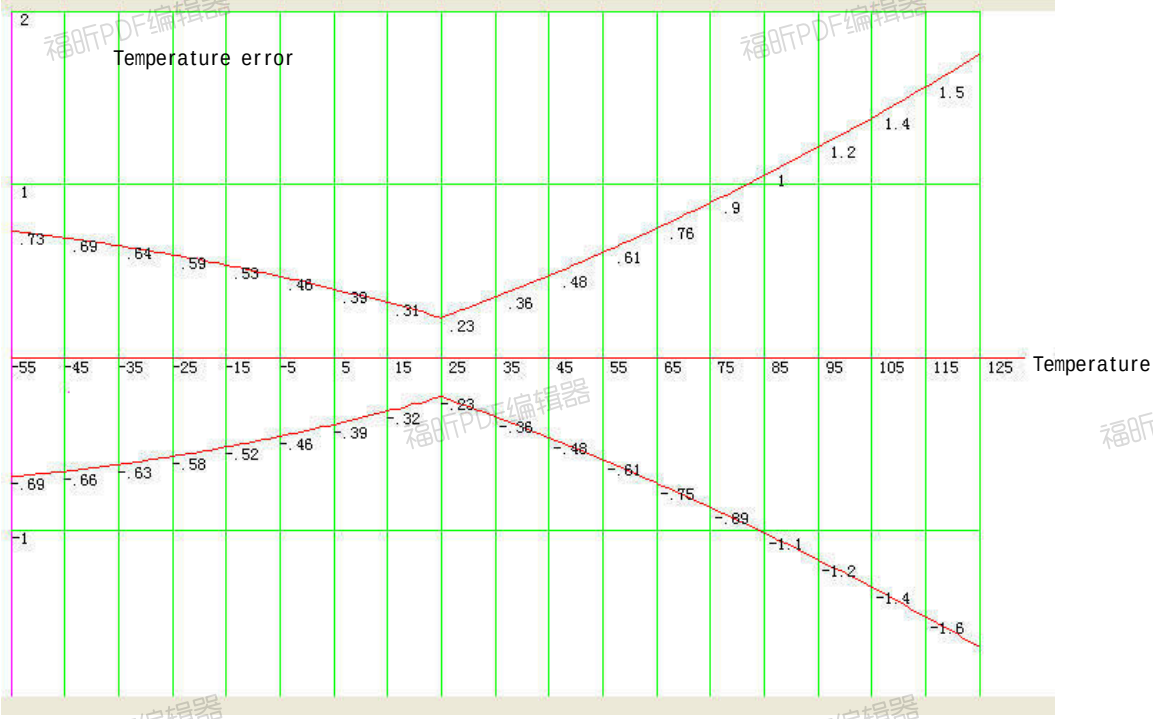


福昕PDF编辑器